

ARMY TM 11-5895-1318-24P

NAVY EE150-LS-PLD-010/W110-RT1511

AIR FORCE TO 31R2-2GRC215-42

NSN: 5895-01-278-8919

**ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL SUPPORT
MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST FOR**

RECEIVER-TRANSMITTER, RADIO

RT-1511/GRC-215

Distribution authorized to the Department of Defense and DOD contractors only for official use or for administrative or operational purposes. This determination was made on 15 January 1991. Other requests for this document will be referred to Commander, U.S. Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LM-LT, Fort Monmouth, New Jersey 07703-5000.

DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

DEPARTMENTS OF THE ARMY, THE NAVY, AND THE AIR FORCE

1 APRIL 1991

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LM-LT, Fort Monmouth, New Jersey 07703-5000.

For Air Force, submit AFTO Form 22 (Technical Order System Publication Improvement Report and Reply) in accordance with paragraph 6-5, Section VI, TO 00-5-1. Forward direct to prime ALC/MST.

For Navy, mail comments to the Commander, Space and Naval Warfare Systems Command, ATTN: SPAWAR 8122, Washington, DC 20363-5100.

In either case, a reply will be furnished direct to you.

ARMY TM 11-5895-1318-24P

NAVY EE150-LS-PLD-010/W110-RT1511

Table of Contents

I INTRODUCTION

II Repair Parts List

III Special Tools

IV CROSS-REFERENCE INDEXES

List of Figures

[Figure 1 Receiver-Transmitter, Radio RT-1511/GRC-215 \(A3023795\)](#)

[Figure 2 Manpack Receiver/Exciter A1 \(A3023805\)](#)

[Figure 3 Case Assembly A1A1 \(A3026001\)](#)

[Figure 4 Chassis Assembly A1A2 \(A3031341\)](#)

[Figure 5 Front Panel Assembly A1A2A1 \(A3026002\)](#)

[Figure 6 RF Power Amplifier CCA. A1A2A1A2 \(A3027322-1\)](#)

[Figure 7 RF Power Control CCA A1A2A1A1 \(A3027344\)](#)

[Figure 8 Receiver Exciter Chassis A1A2A20 \(A3026000\)](#)

[Figure 9 Filter Module Assy A1A2A20A15 \(A3027658\)](#)

[Figure 10 Filter Amplifier Assy A1A2A20A16 \(A3027657\)](#)

[Figure 11 CCA \(A3027655\)](#)

[Figure 12 CCA \(A3027656\)](#)

[Figure 13 CCA \(A3027660\)](#)

[Figure 14 CCA \(A3027659\)](#)

[Figure 15 Variable Condenser Assy A1A2A20C1 \(A3027653\)](#)

[Figure 16 CCA \(A3027661\)](#)

[Figure 17 Grandmother Board CCA A1A2A20A12 \(A3027352\)](#)

[Figure 18 Power Supply Assy \(A3027672\)](#)

[Figure 19 Power Supply CCA \(A3027654\)](#)

[Figure 20 Relay CCA \(A3027346\)](#)

[Figure 21 Coil Assy \(A3030152\)](#)

[Figure 22 Interface CCA A1A2A20A18 \(A3027685\)](#)

[Figure 23 Synthesizer Module Assy A1A2A3 \(A3026003\)](#)

[Figure 24 Oscillator CCA \(A3031111\)](#)

[Figure 25 CCA \(A3031168\)](#)

[Figure 26 CCA \(A3031169\)](#)

[Figure 27 CCA \(A3031170\)](#)

[Figure 28 CCA \(A3031184\)](#)

[Figure 29 Data Receiver and Logic CCA \(A3027687\)](#)

[Figure 30 Std. Freq. Module CCA. \(A3027688\)](#)

[Figure 31 RF Translator Assy A1A2A2 \(A3026004\)](#)

[Figure 32 CCA \(A3027673\)](#)

[Figure 33 Audio Assembly A1A2A4 \(A3026005\)](#)

[Figure 34 CCA \(A3027350\)](#)

[Figure 35 ATU Sequence Mod Assy A1A3A5 \(A3026006\)](#)

[Figure 36 CCA \(A3027348\)](#)

[Figure 37 Servo Amp CCA A1A2A6 \(A3026007\)](#)

List of Tables

Section I

INTRODUCTION

1 Scope

This manual lists and authorizes spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of organizational, direct support, and general maintenance of Receiver-Transmitter, Radio RT-1511/GRC-215. It authorizes the requisitioning, issue, and disposition of spares, repair parts and special tools as indicated by the source, maintenance and recoverability (SMR) codes.

2 General

This Repair Parts and Special Tools List is divided into the following sections:

a [Section II](#) Repair Parts List

A list of spares and repair parts authorized by this RPSTL for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in ascending numeric sequence, with the parts in each group listed in ascending item number sequence. Figure numbers are listed directly beneath the group header. Bulk materials are listed in item name sequence.

b [Section III](#) Special Tools List

A list of special tools, special TMDE, and other special support equipment authorized by this RPSTL (as indicated by Basis of Issue (BOI) information in (column (5)) for the performance of maintenance.

c [Section IV](#) Cross-Reference Indexes

A list, in National item identification number (NIIN) sequence, of all National stock numbered items appearing in the listing, followed by a list in alphameric sequence of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance. The figure number and item number index lists figure and item numbers in numeric sequence and cross-references National stock number, Commercial and Government Entity Code and part numbers.


3 Explanation of Columns ([Section II](#) and [III](#))

a Item No (Column (1))

Indicates the number used to identify items called out in the illustration.

b SMR Code (Column (2))

The source, maintenance, and recoverability (SMR) code is a five-position code containing supply/requisitioning information, maintenance category authorization criteria, and disposition instruction, as shown in the following breakout:

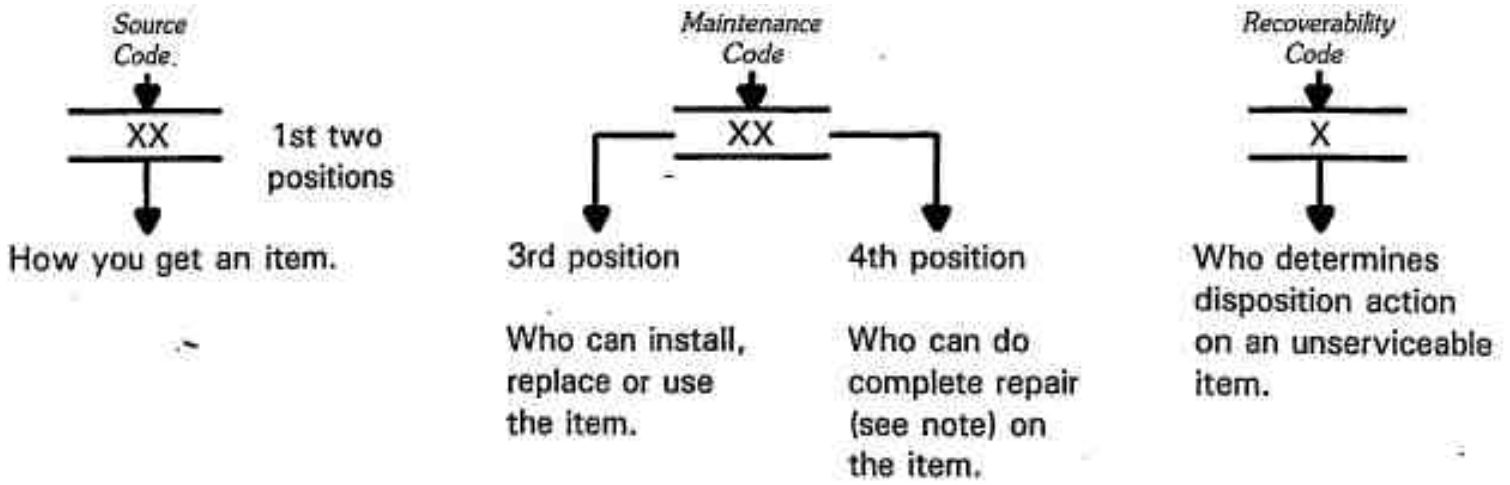

NOTE

Complete repair: Maintenance capacity, capability, and authority to perform all corrective maintenance tasks of the "Repair" function in a use/user environment in order to restore serviceability to a failed item.

1. **Source Code** The source code tells you how to get an item needed for maintenance, repair, or overhaul of an end item/equipment. Explanations of source codes follows:

<i>Code</i>	<i>Explanation</i>
<div style="border: 1px solid black; padding: 5px; display: inline-block;"> PA PB PC PD PE PF PG </div>	Stocked items; use the applicable NSN to request/requisition items with these source codes. They are authorized to the category indicated by the code entered in the third position of the SMR code.
	<p>NOTE</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;"> Items coded PC are subject to deterioration. </div>
<div style="border: 1px solid black; padding: 5px; display: inline-block;"> KD KF KB </div>	Items with these codes are not to be requested/requisitioned individually. They are part of a kit which is authorized to the maintenance category indicated in the third position of the SMR code. The complete kit must be requisitioned and applied.

<div style="border: 1px solid black; padding: 5px;"> <p>MO — Made at org/ AVUM category</p> <p>MF — Made at DS/ AVIM category</p> <p>MH — Made at GS category</p> <p>ML — Made at Spec- ialized Repair Activity (SRA)</p> <p>MD — Made at Depot</p> </div>	<p>Items with these codes are not to be requested/requisitioned individually. They must be made from bulk material which is identified by the part number in the description and usable on code (UOC) column and listed in the Bulk Material group of the repair parts list. If the item is authorized to you by the third position code of the SMR code, but the source code indicates it is made at a higher category, order the item from the higher category of maintenance.</p>
<div style="border: 1px solid black; padding: 5px;"> <p>AO — Assembled by org/ AVUM category</p> <p>AF — Assembled by DS/ AVIM category</p> <p>AH — Assembled by GS category</p> <p>AL — Assembled by SRA</p> <p>AD — Assembled by Depot</p> </div>	<p>Items with these codes are not to be requested/requisitioned individually. The parts that make up the assembled item must be requisitioned or fabricated and assembled at the category of maintenance indicated by the source code. If the disposition code of the SMR code authorizes you to replace the item, but the source code indicates the item is assembled at a higher category, order the item from the higher category of maintenance.</p>
XA	Do not requisition an "XA" coded item. Order its next higher assembly.
XB	If an "XB" item is not available from salvage, order it using the Cagec and part number given.
XC	Installation drawing, diagram, instruction sheet, field service drawing, that is identified by manufacturers part number.
XD	Item is not stocked. Order an "XD" coded item through normal supply channels using the CAGEC and part number given, if no NSN is available.

NOTE

Cannibalization or controlled exchange, when authorized, may be used as a source of supply for items with the above source codes, except for those source coded "XA" or those aircraft support items restricted by requirements of AR 750-1.

2. Maintenance Code. Maintenance codes tell you the category of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the SMR code as follows:

a. The maintenance code entered in the third position tells you the lowest maintenance category authorized to remove, replace, and use an item. The maintenance code entered in the third position will indicate authorization to one of the following categories of maintenance.

<i>Code</i>	<i>Application/Explanation</i>
C	Crew or operator maintenance done within organizational or aviation maintenance.
O	Organizational or aviation unit category can remove, replace, and use the item.
F	Direct support or aviation intermediate category can remove, replace, and use the item.

H	General support category can remove, replace, and use the item.
L	Specialized repair activity can remove, replace, and use the item.
D	Depot category can remove, replace, and use the item.

b. The maintenance code entered in the fourth position tells whether or not the item is to be repaired and identifies the lowest maintenance category with the capability to do complete repair (i.e., perform all authorized repair functions). This position will contain one of the following maintenance codes:

NOTE

Some limited repair may be done on the item at a lower category of maintenance, if authorized by the Maintenance Allocation Chart (MAC) and SMR codes.
--

<i>Code</i>	<i>Application/Explanation</i>
O	Organizational or aviation unit is the lowest category that can do complete repair of the item.
F	Direct support or aviation intermediate is the lowest category that can do complete repair of the item.
H	General support is the lowest category that can do complete repair of the item.
L	Specialized repair activity (designate the specialized repair activity) is the lowest category that can do complete repair of the item.
D	Depot is the lowest category that can do complete repair of the item.
Z	Nonreparable. No repair is authorized.
B	No repair is authorized. (No parts or special tools are authorized for the maintenance of a "B" coded item.) However, the item may be reconditioned by adjusting, lubricating, etc., at the user category.

3. **Recoverability Code.** Recoverability codes are assigned to items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the SMR Code as follows:

<i>Recoverability codes</i>	<i>Application/Explanation</i>
Z	Nonreparable item. When unserviceable, condemn and dispose of the item at the category of maintenance shown in the third position of SMR Code.
O	Reparable item. When uneconomically repairable, condemn and dispose of the item at organizational or aviation unit category.
F	Reparable item. When uneconomically repairable, condemn and dispose of the item at the direct support or aviation intermediate category.
H	Reparable item. When uneconomically repairable, condemn and dispose of the item at general support category.
D	Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal of item not authorized below depot category.
L	Reparable item. Condemnation and disposal not authorized below specialized repair activity (SRA).
A	Item requires special handling or condemnation procedures because of specific reasons (e.g., precious metal content, high dollar value, critical material, or hazardous material). Refer to appropriate manuals/directives for specific instructions.

c - **Untitled-**

CAGEC (Column (3)) The Commercial and Government Agency Entity code (CAGEC) is a 5-digit numeric code which is used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

d -**Untitled**-

Part Number (Column (4)) Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When you use a NSN to requisition an item, the item you receive may have a different part number from the part ordered.

e Description and Usable on Code (UOC) (Column (5))

This column includes the following information.

1. The Federal item name and, when required, a minimum description to identify the item.
2. In the Special Tools section, the basis of issue (BOI) appears as the last line in the entry for each special tool, special TMDE, and other special support equipment. When density of equipments supported exceeds density spread indicated in the basis of issue, the total authorization is increased proportionately.
3. The statement "END OF FIGURE" appears just below the last item description in Column (5) for a given figure in both [section II](#) and [section III](#).

f Qty (Column (6))

Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that the quantity is variable and the quantity may vary from application to application.

4 Explanation of Columns ([Section IV](#))

a National Stock Number (NSN) Index.

1. **Stock number column.** This column lists the NSN by National item identification number (NIIN) sequence. The NIIN consists of the last nine digits of the NSN. When using this column to locate an item, ignore the first four digits of the NSN. When requisitioning items use the complete NSN (13 digits).
2. **Fig. column.** This column lists the number of the figure where the item is identified/located. The illustrations are in numerical sequence in [sections II](#) and [III](#).
3. **Item column.** The item number identifies the item associated with the figure listed in the adjacent Fig. column. This item is also identified by the NSN listed on the same line.

b Part Number Index.

Part numbers in this index are listed by part number in ascending alphameric sequence.

1. **CAGEC column.** This column lists the Commercial and Government Entity code (CAGEC).
2. **Part number column.** This column indicates the part number assigned to the item.
3. **Stock number column.** This column lists the National stock number for the associated part number and

manufacturer identified in the part number and CAGEC columns to the left.

4. **Fig. column.** This column lists the number of the figure where the item is identified/located in [sections II](#) and [III](#).

5. **Item column.** The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

c Figure and Item Number Index

1. **Fig column.** This column lists the number of the figure where the item is identified/located in [sections II](#) and [sections III](#).

2. **Item column.** The item number is that number assigned to the item as if appears in the figure referenced in the adjacent figure number column.

3. **Stock number column.** This column lists the national stock number for the item.

4. **CAGEC column.** The Commercial and Government Entity Code (CAGEC) is a 5-digit numeric code used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

5. **Part number column.** Indicates the primary number used by the manufacturer (individual, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

5 Special Information

a Associated Publications

The publication listed below pertains to Receiver-Transmitter, Radio RT-1511 / GRC-215 and its components:

1. TM 11-5895-1318-24, Receiver-Transmitter, Radio RT-1511/GRC-215

b National Stock Numbers

National stock numbers (NSN's) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-MM, Fort Mon-mouth, NJ 07703-5000 for the part required to support your equipment.

NOTE

An item SMR coded "H" in the third, fourth, and fifth position is interpreted as Intermediate for Air Force Repair.

6 How to Locate Repair Parts

a When National stock number or part number is not known.

1. **First.** Using the table of contents, determine the assembly group or subassembly group to which the item belongs. This is necessary since figures are prepared for assembly groups and subassembly groups, and listings are divided into the same groups.

2. **Second.** Find the figure covering the assembly group or subassembly group to which the item belongs.
3. **Third.** Identify the item on the figure and note the item number.
4. **Fourth.** Refer to the Repair Parts List for the figure to find the part number for the item number noted on the figure.
5. **Fifth.** Refer to the Part Number Index to find the NSN, if assigned.

b When National stock number or part number is known.


1. **First.** Using the Index of National stock numbers and part numbers, find the pertinent National stock number or part number. The NSN index is in National item identification number (NIIN) sequence (para 4a(1)). The part numbers in the part number index are listed in ascending alphameric sequence (para 4b). Both indexes cross-reference you to the illustration figure and item number of the item you are looking for.
2. **Second.** After finding the figure and item number, verify that the item is the one you're looking for, then locate the item number in the repair parts list for the figure.

7 Abbreviations

Not applicable.

Section II


Repair Parts List

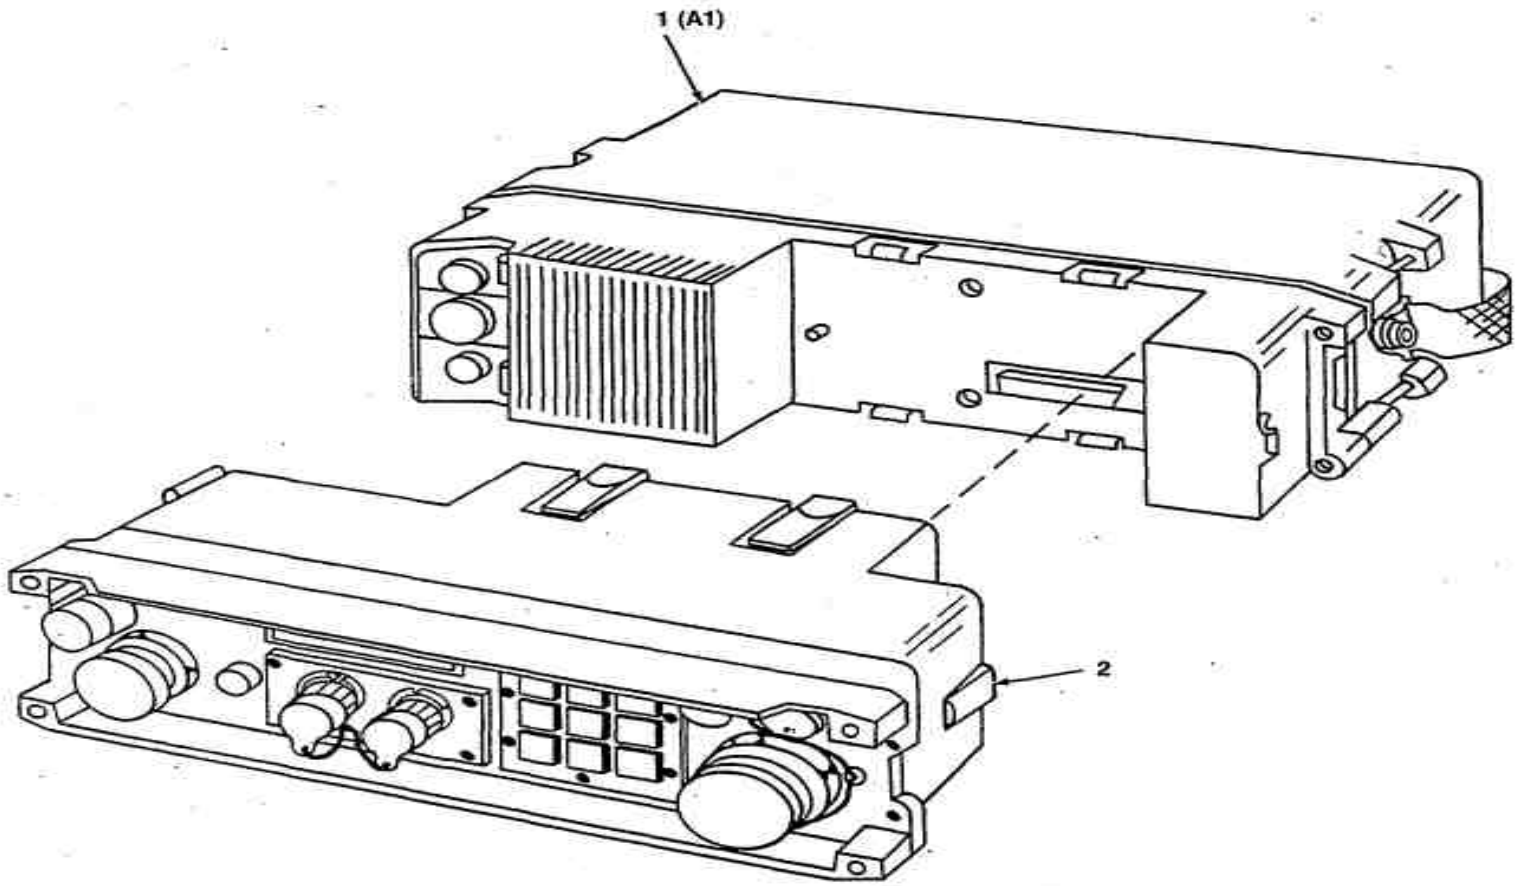

CEONL-001

FIGURE 1 Receiver-Transmitter, Radio RT-1511/GRC-215 (A3023795)



(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 00 RECEIVER-TRANSMITTER, RADIO RT-1511/GRC-215 (A3023795)	
				FIG.1	
1	PAHLD	80063	A3023805	RECEIVER-TRANSMITTE (SEE FIG. FOR BREAKDOWN) .	1
2	PAOLD	80063	C-11670/G	CONTROL ECCM MODULE (SEE TM11-5895-1315-24P FOR PARTS BREAKDOWN) .	1
				END OF FIGURE	

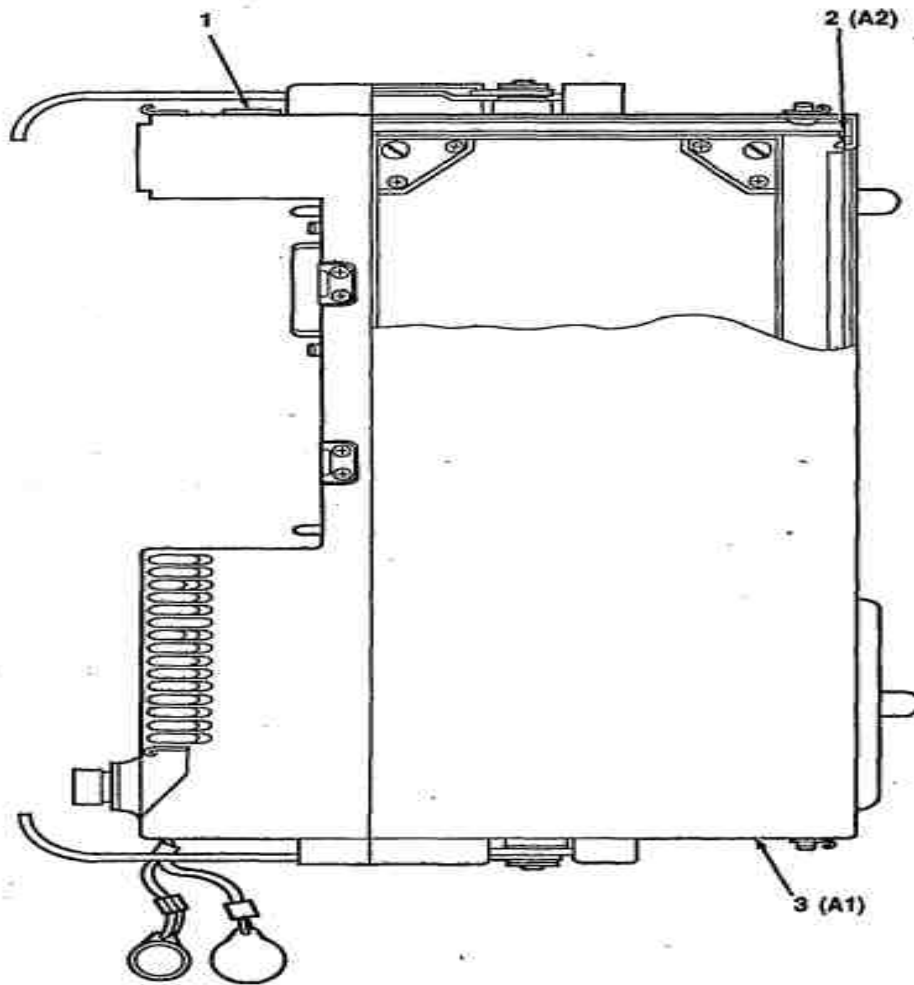


CEONL-002

FIGURE 2 Manpack Receiver/Exciter A1 (A3023805)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01 MANPACK RECEIVER/EXCITER A1 (A3023805)	
				FIG. 2	
1	XBHZZ	80063	A3078271-3	PLATE, IDENTIFICATIO.	1
2	XBHLL	80063	A3031341	CHASSIS ASSEMBLY (SEE FIG. 4 FOR BREAKDOWN) .	1
3	XBHHH	80063	A3026001	CASE ASSEMBLY (SEE FIG. 3 FOR BREAKDOWN) .	1
				END OF FIGURE	

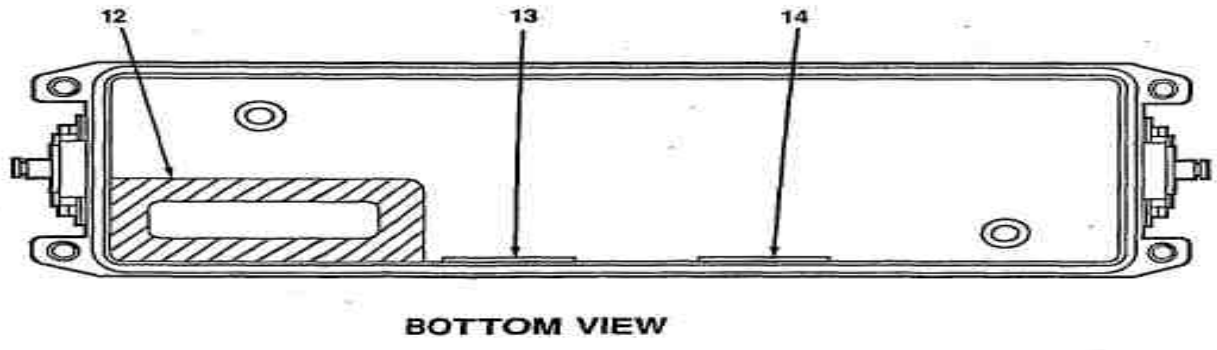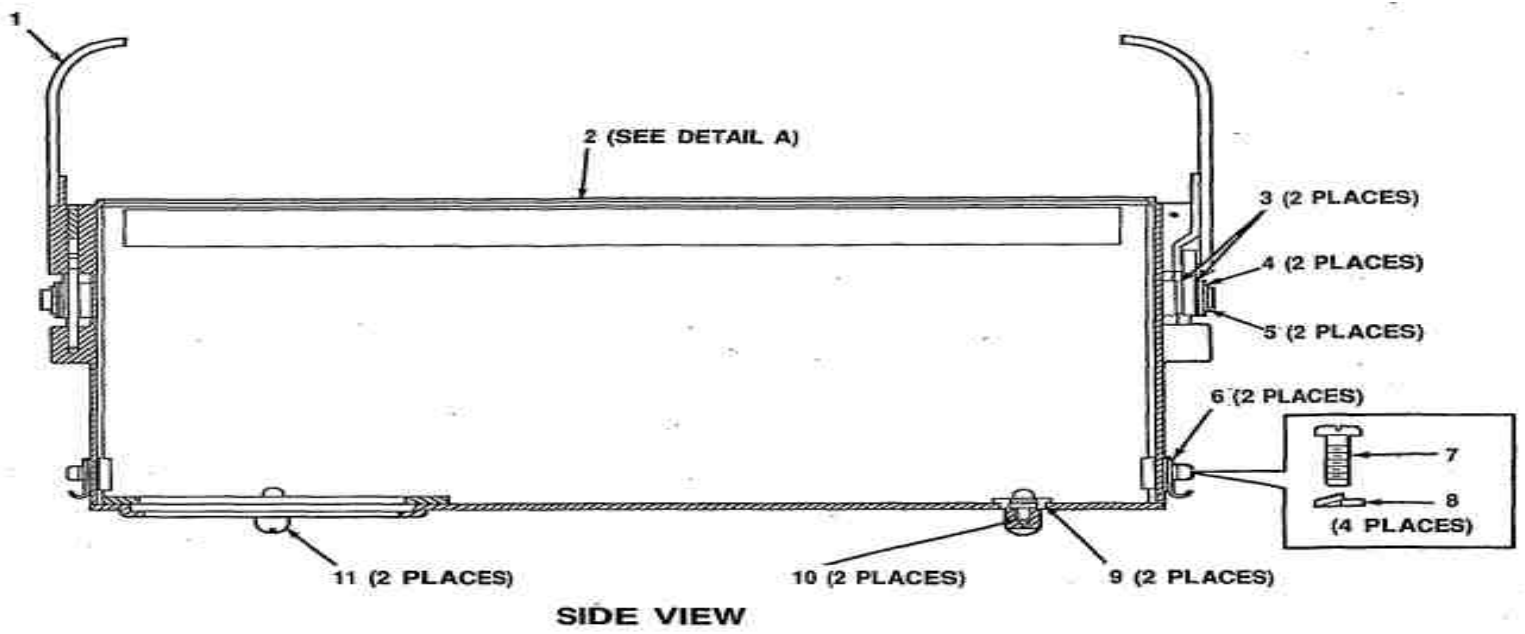

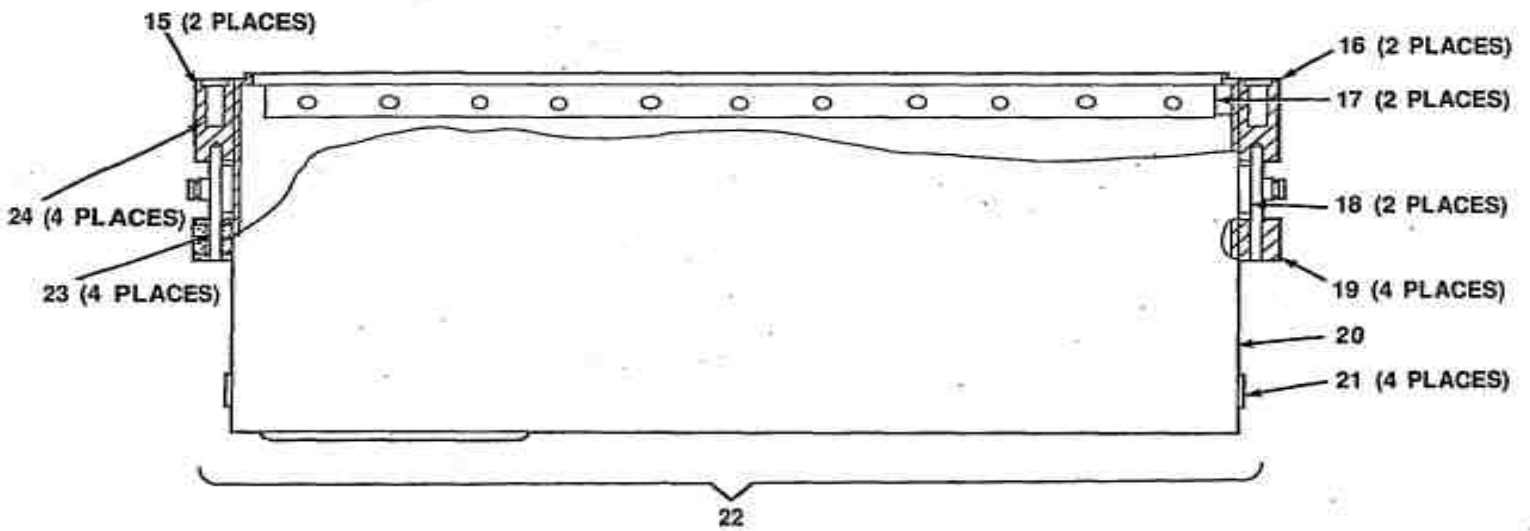


**SIDE VIEW
DETAIL A**

CEONL-004


FIGURE 3 Case Assembly A1A1 (A3026001)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0101 CASE ASSEMBLY A1A1 (A3026001)	
				FIG. 3	
1	PAHZZ	80063	A3027357	STRAP,WEBBING ASSEM	1
2	XBHHH	80063	A3031498	CONTAINER ASSEMBLY	1
3	PAHZZ	80063	A3027736	WASHER,FLAT	4
4	PAHZZ	80063	A3027740	WASHER,FLAT	2
5	PAHZZ	96906	MS16624-5025	RING,RETAINING	2
6	PAHZZ	82240	2-57-0334-55-00	FASTER,LINK LOCK	2
7	PAHZZ	96906	MS51957-13B	SCREW,MACHINE	4


8	PAHZZ	80063	A3027026-2	WASHER,LOCK	4
9	PCHZZ	A0720	101-279	GASKET,O-RING	2
10	PAHZZ	80063	A3031420	PIN.	2
11	XBHZZ	80063	A3027781	GUIDE PIN	2
12	PCHZZ	80063	A3027875	GASKET (MAKE FROM A3026999-3)	1
13	XBHZZ	80063	A3031038-184	LABEL	1
14	XBHZZ	80063	A3034572	LABEL -ELECTROSTATE	1
15	XBHZZ	80063	A3031417	SUPPORT (MAKE FROM A3030262)	2
16	XBHZZ	80063	A3031414	SUPPORT (MAKE FROM A3030262)	2
17	PAHZZ	80063	A3027903	YOKE, THRUST	2
18	PAHZZ	80063	A3031413	BUSHING	2
19	XBHZZ	80063	A3031415	SUPPORT (MAKE FROM A3030262)	4
20	XBHZZ	80063	A3031411	CONTAINER	1
21	PAHZZ	80063	A3031412	BUSHING	4
22	XBHHH	80063	A3031423	CONTAINER ASSEMBLY	1
23	PAHZZ	80063	A3031421	PIN	4
24	PAHZZ	96906	MS21209F1-20	INSERT,SCREW THREAD	4
				END OF FIGURE	

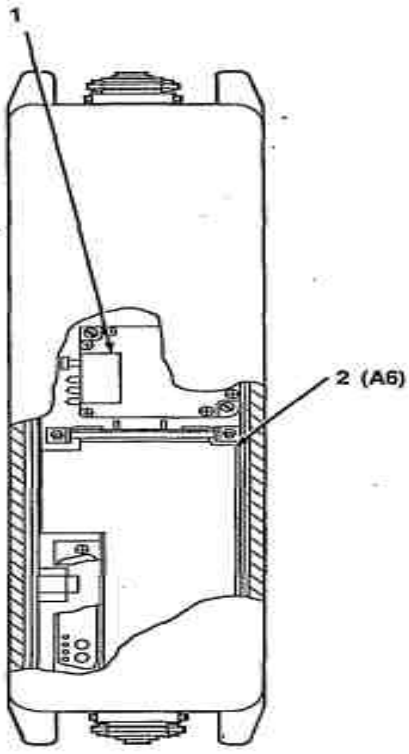

BOTTOM VIEW

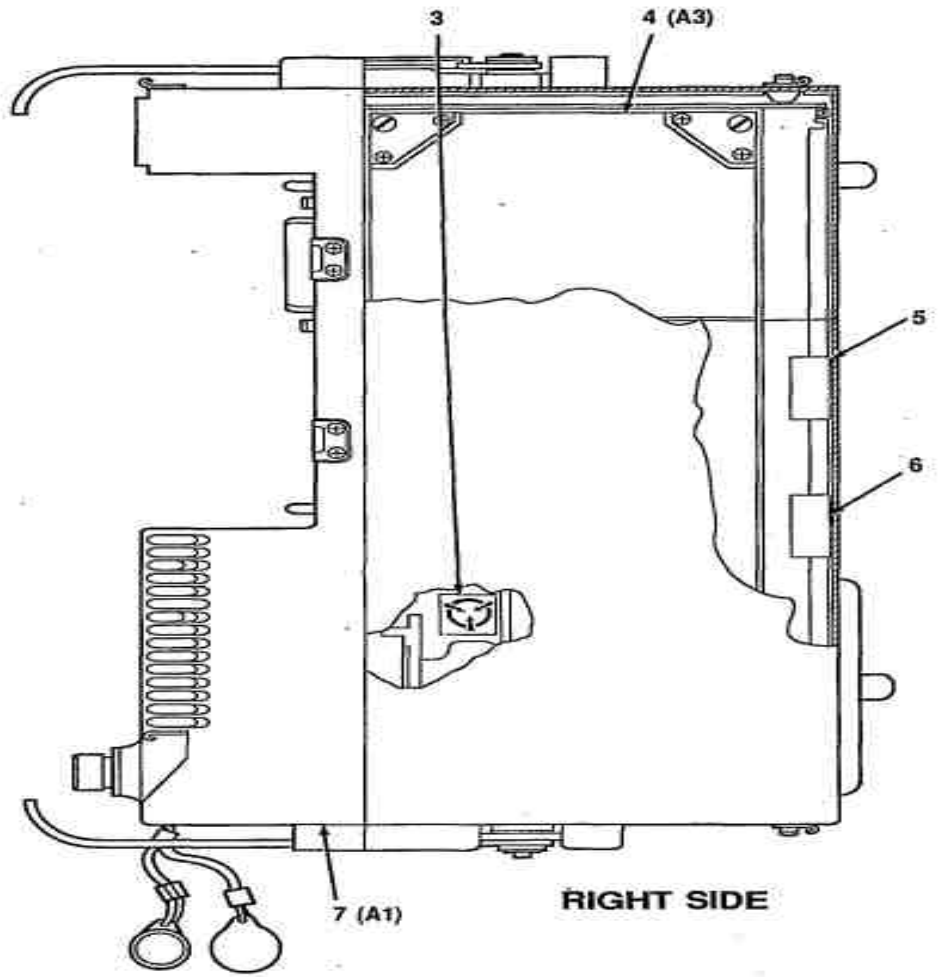

RIGHT SIDE

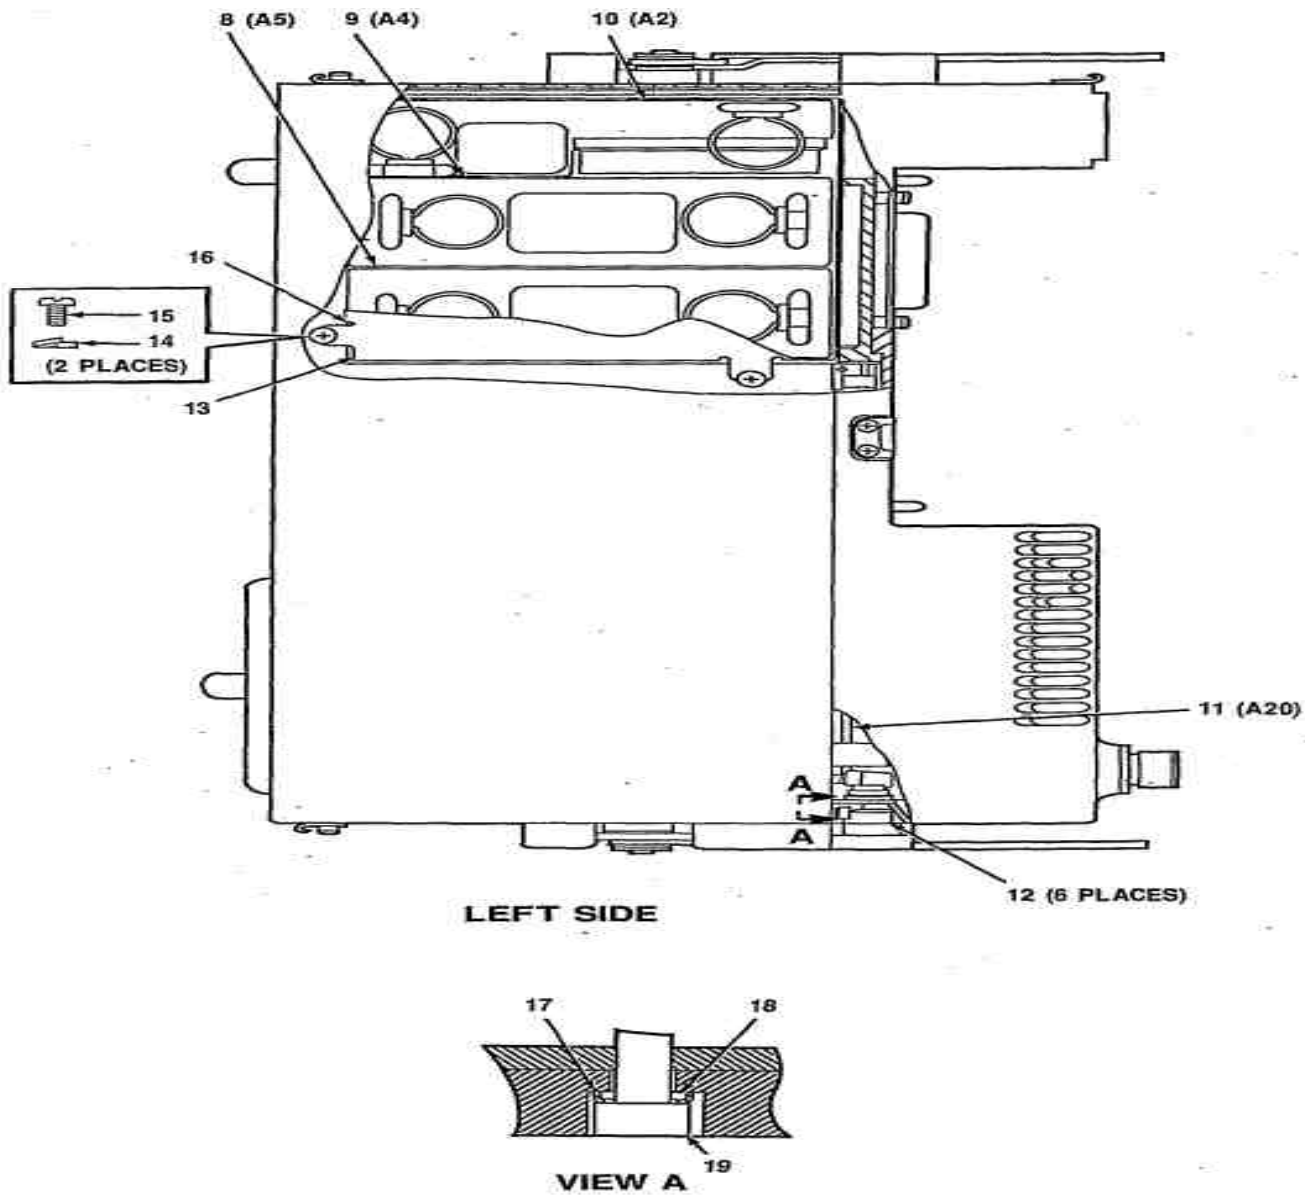

CECNL-006


FIGURE 4 Chassis Assembly A1A2 (A3031341)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102 CHASSIS ASSEMBLY A1A2 (A3031341)	
				FIG. 4	
1	XBHZZ	80063	A3031038-212	LABEL	1
2	PAHLD	80063	A3026007	CIRCUIT CARD ASSEMB (SEE FIG. 37 FOR BREAKDOWN)	1
3	XBHZZ	80063	A3034571-3	LABEL, ELECTROSTATIC	1
4	XBHLD	80063	A3026003	SYNTHESIZER (SEE FIG. 23 FOR BREAKDOWN)	1
5	XBHZZ	80063	A3031038-210	LABEL	1



6	XBHZZ	80063	A3031038-211	LABEL	1
7	PAHLL	80063	A3026002	FRONT PANEL ASSEMB (SEE FIG. 5 FOR BREAKDOWN)	1
8	PAHLD	80063	A3026006	SEQUENCER,AUTOMATIC (SEE FIG. 35 FOR BREAKDOWN)	1
9	PAHLD	80063	A3026005	AUDIO INTERFACE (SEE FIG. 33 FOR BREAKDOWN)	1
10	PAHLD	80063	A3026004	TRANSLATOR,RADIO FR (SEE FIG. 31 FOR BREAKDOWN)	1
11	XBHLL	80063	A3026000	CHASSIS -RECEIVER/E (SEE FIG. 8 FOR BREAKDOWN)	1
12	XBHLL	80063	A3027937	SCREW ASSEMBLY	6
13	XBHHH	80063	A3027954	COVER,ACCESS ASSEMB	1
14	PAHZZ	80063	A3027810	WASHER,LOCK	2
15	PAHZZ	80063	A3027812	SCREW,RECESSED HEAD (MAKE FROM MS24693-C2)	2
16	XBHZZ	80063	A3027838-1	COVER	1
17	PCHZZ	80063	A3027031-4	GASKET	1
18	PAHZZ	80063	A3030947	RING,MOUNTING	1
19	XBHZZ	80063	A3027721	MACHINE SCREW,SPECI	1
				END OF FIGURE	

1 (SEE DETAIL E)

2 (SEE DETAIL F)


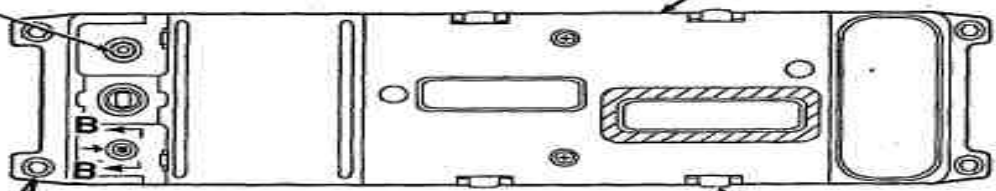


FRONT VIEW







10 (SEE DETAIL G)

7 (E7) 8 (2 PLACES) 9 (P1)

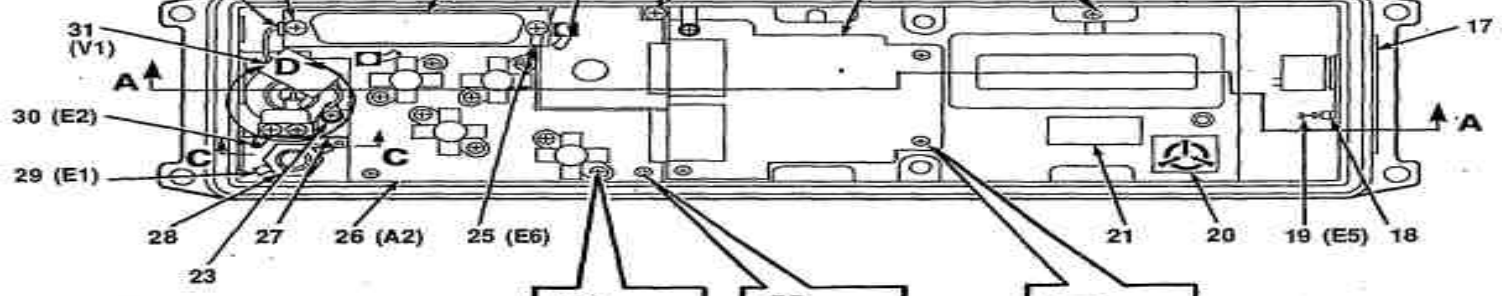


REAR VIEW




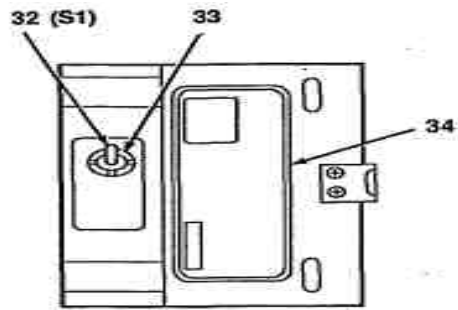


LEFT END VIEW

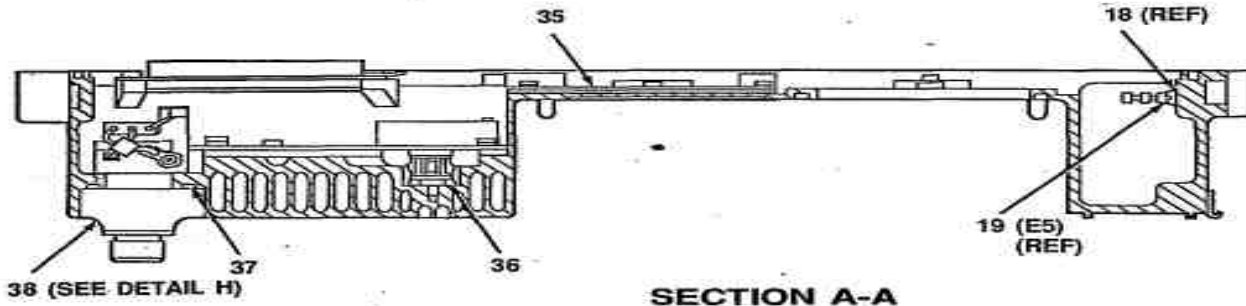


SECTION A-A

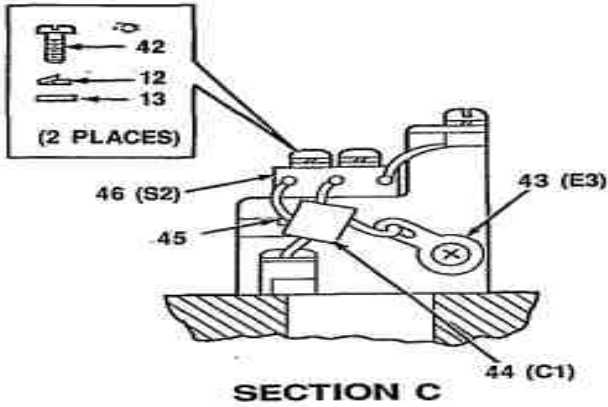


SECTION C

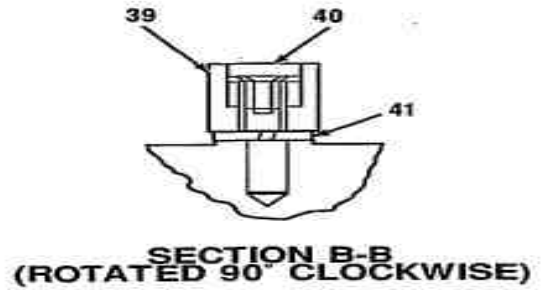


SECTION B-B
(ROTATED 90° CLOCKWISE)

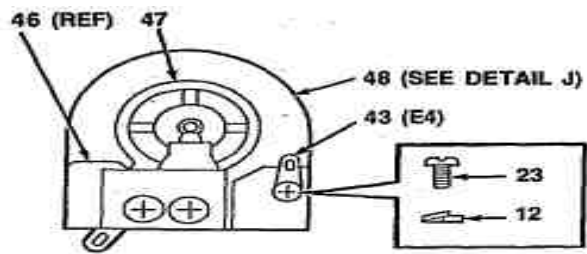



SECTION D

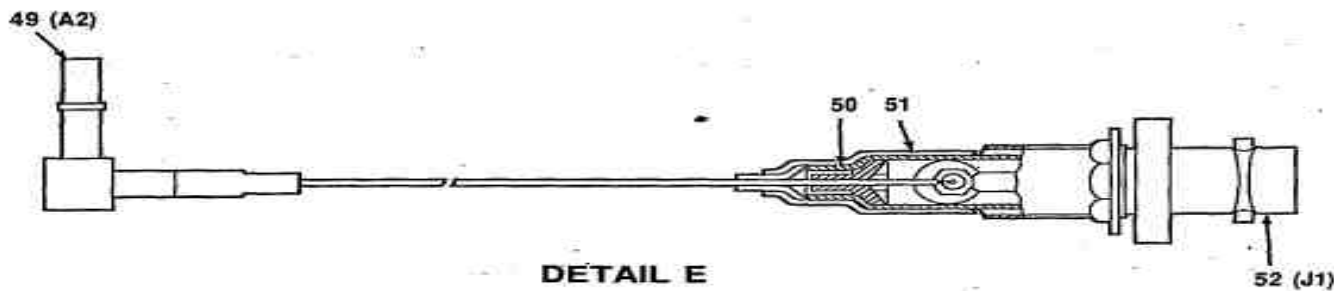


DETAIL E

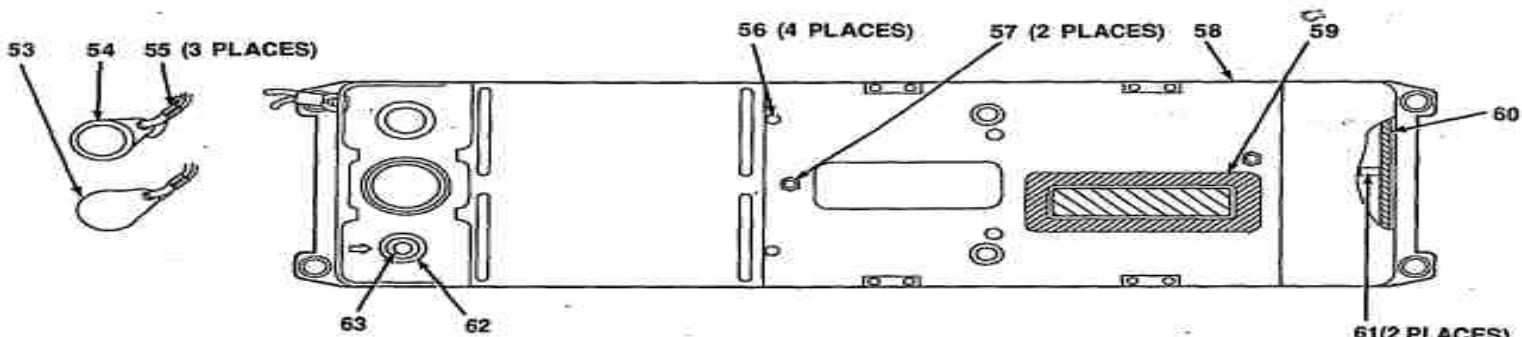


TOP VIEW
DETAIL F

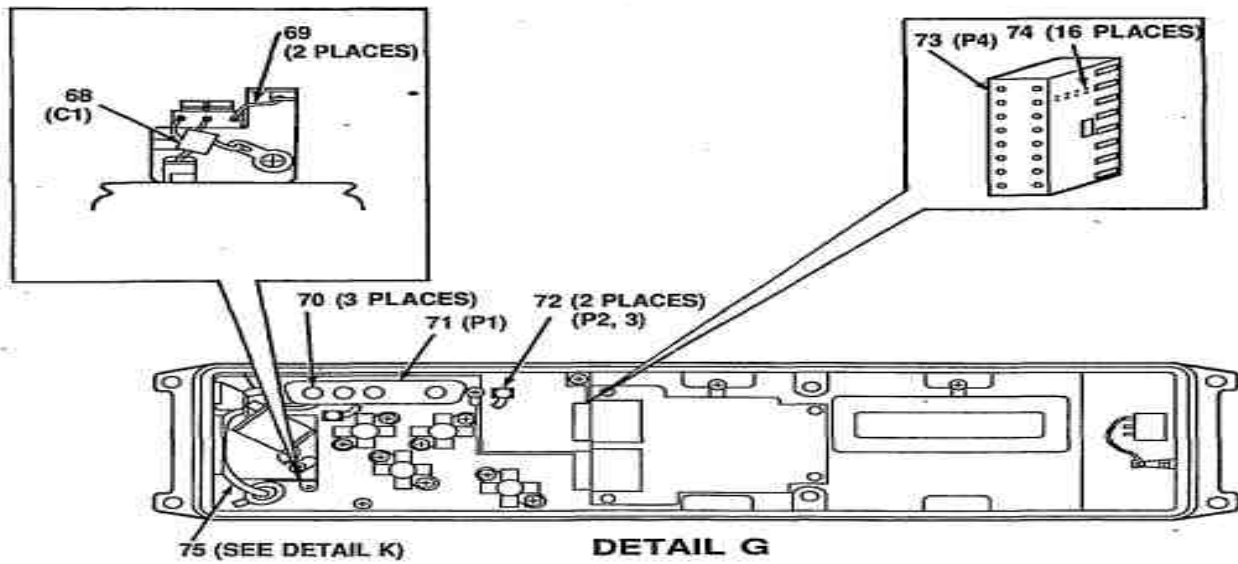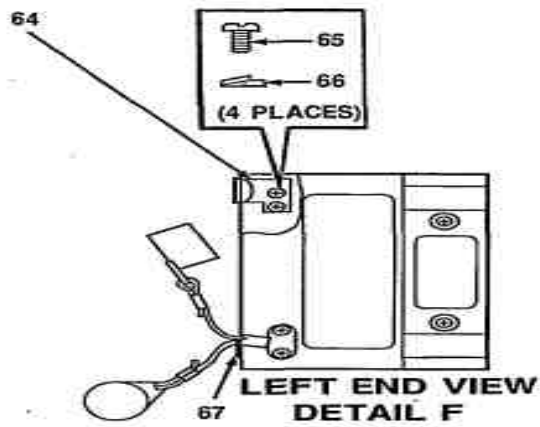


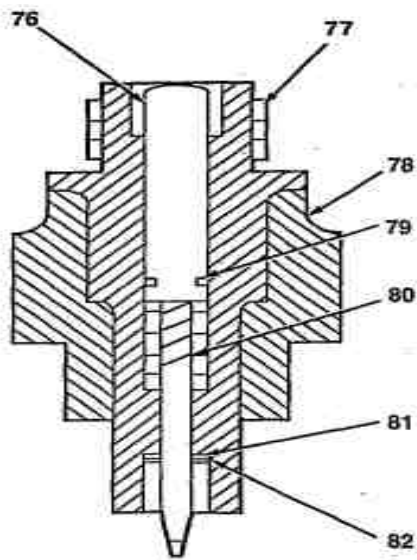

DETAIL H

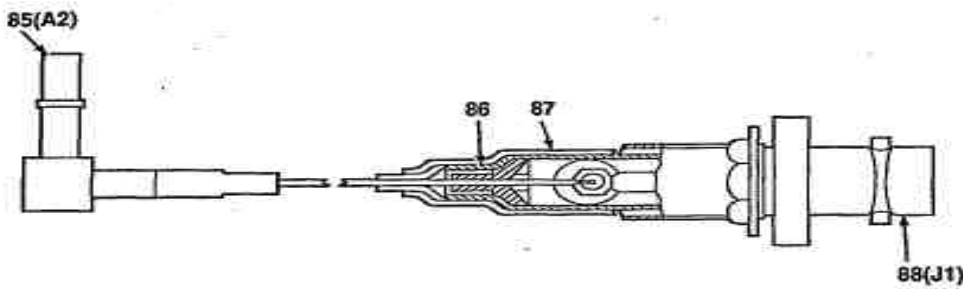

DETAIL K

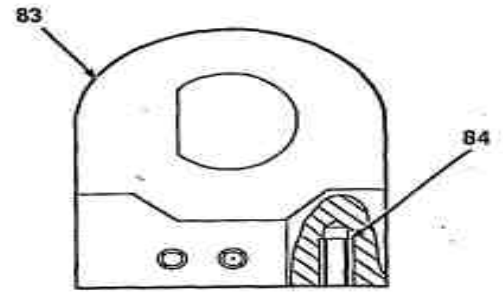

DETAIL J

CEONL-011


FIGURE 5 Front Panel Assembly A1A2A1 (A3026002)


(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 010201 FRONT PANEL ASSEMBLY A1A2A1 (A3026002)	
				FIG.5	
1	PAHLL	80063	A3031087	CABLE ASSEMBLY	1
2	XBHLL	80063	A3027354	FRONT PANEL ASSEMBL	1
3	PAHZZ	80063	A3031470	HOOK	5
4	PAHZZ	96906	MS51959-2B	SCREW, MACHINE	10
5	XBHZZ	80063	A3027734-1	WASHER	4
6	PAHZZ	80063	A3027727-1	SCREW,CAPTIVE	4
7	PAHZZ	80063	A3026908-3	TERMINAL,SOLDER LUG	1

8	PAHZZ	96906	MS51957-13	SCREW,MACHINE	10
9	PAHZZ	28009	16600688-145	CONNECTORS,RECPTACL	1
10	PAHLL	80063	A3027356	CABLE ASSEMBLY	1
11	PAHZZ	96906	MS51957-8	SCREW,MACHINE	1
12	XBHZZ	A3026	3-10311-002	WASHER,LOCK	8
13	PAHZZ	A3026	3-10285.005//C	WASHER,FLAT	8
14	PAHLL	80063	A3027344	CIRCUIT CARD ASSEMB (SEE FIG.7 FOR BREAKDOWN)	1
15	PAHZZ	96906	MS51957-2	SCREW,MACHINE	2
16	PAHZZ	80063	A3027745	BRACKET,ANGLE	2
17	XBHZZ	80063	A3031401-3	LABEL	1
18	PAHZZ	96906	MS35333-69	WASHER,LOCK	1
19	PAHZZ	80063	A3026906-2	TERMINAL	1
20	XBHZZ	80063	A3034571-1	LABEL, ELECTROSTATI	1
21	XBHZZ	80063	A3031038-187	LABEL	1
22	PAHZZ	72962	79-1660-26	NUT,SELF-LOCKING, HE	3
23	PAHZZ	96906	MS51957-3	SCREW,MACHINE	4
24	XBHZZ	A3026	3-10311-004	WASHER,LOCK	8
25	PAHZZ	80063	A3026908-4	TERMINAL,LUG	1
26	PAHLL	80063	A3027322	CIRCUIT CARD ASSEMB (SEE FIG. 6 FOR BREAKDOWN)	1
27	XBHZZ	80063	A3027817	SUPPORT	1
28	XBHZZ	80063	A3031097	FERRULE	1
29	PAHZZ	80063	A3027824	TERMINAL,LUG	1
30	PAHZZ	80063	A3027823	TERMINAL,LUG	1
31	PAHZZ	71482	UBD-4.0	ARRESTER,ELECTRICAL	1
32	PAHZZ	80063	A3030153-1	COMMUNICATOR	1
33	PAHZZ	80063	A3027730	BUSHING,THREADED	1
34	XBHZZ	80063	A3027862	LABEL	1
35	XBHZZ	80063	A3027896	INSULATOR,FRONT PAN	1
36	PAHZZ	97942	577R126H07	HEAT SINK,ELECTRICA	1
37	PCHZZ	80063	A3027747-2	PACKING PREFORMED	1
38	XBHLL	80063	A3027957	ANTENNA SUPPORT ASS	1
39	XBHZZ	80063	A3027806	CAP,THREADED	1
40	PAHZZ	96906	MS24693C1	SCREW,MACHINE	1
41	XBHZZ	80063	A3027810	WASHER,LOCK	1
42	PAHZZ	96906	MS51957-6	SCREW,MACHINE	2
43	PAHZZ	80063	A3026908-1	TERMINAL,SOLDER LUG	2

44	PAHZZ	95275	VY81C510J	CAPACITOR,FIXED, CER	1
45	XBHZZ	80063	A3027766	SPACER,PLATE	1
46	PAHZZ	11871	317-400-157	SWITCH,SENSITIVE	1
47	XBHZZ	80063	A3030510	BUSHING	1
48	XBHLL	80063	A3027958	CONTACT,SUPPORT ASS	1
49	PAHZZ	80063	A3026757-43	CONNECTOR,CONTACTS	1
50	PAHZZ	80063	A3031096	BELL HUB	1
51	PAHZZ	80063	A3031095	ADAPTER	1
52	PAHZZ	81349	M39012/24-0002	CONNECTOR,RECEPTACL	1
53	PAHZZ	80063	A3027820-4	CONNECTOR CAP	1
54	PAHZZ	80063	A3027820-3	COVER,ELECTRICAL CO	1
55	PAHZZ	80063	A3027724	SEAL,STRAPPING	3
56	PAHZZ	81349	M63540/1-2C	STUD,SELF-LOCKING	4
57	XBHZZ	80063	A3031430	PIN,GROOVED, HEADED	2
58	XBHZZ	80063	A3027362	PANEL-FRONT	1
59	PCHZZ	80063	A3027872-1	GASKET	1
60	PCHZZ	80063	A3027871	GASKET	1
61	PAHZZ	81349	M63540/1-3C	STUD,SELF-LOCKING	4
62	XBHZZ	80063	A3026869-1	PIN,ROLL	1
63	XBHZZ	80063	A3027809	INSERT,THREAD	1
64	PAHZZ	80063	A3027355-2	HOOK	1
65	PAHZZ	96906	MS51957-2B	SCREW,MACHINE	4
66	PAHZZ	80063	A3027026-1	WASHER,LOCK	4
67	PAHZZ	80063	A3027355-1	HOOK	1
68	PAHZZ	95275	VY81C510J	CAPACITOR,FIXED, CER	1
69	PAHZZ	80063	A3026941-2	BUS,CONDUCTOR	2
70	PAHZZ	71468	DM53741-5000	CONTACT,ELECTRICAL	3
71	PAHZZ	28009	16600688-145	CONNECTORS,RECPTACL	1
72	PAHZZ	07187	4022892	CONNECTOR,PLUG,ELEC	2
73	PAHZZ	80063	A3030158-2	CONNECTOR,ELECTRICA	1
74	PAHZZ	00779	181270-3	CONTACT,ELECTRICAL	16
75	PAHLL	80063	A3031087	CABLE ASSEMBLY	1
76	XBHZZ	80063	A3027833	PIN,GROOVED,HEAD	1
77	XBHZZ	80063	A3027832	CONTACT	1
78	XBHLL	80063	A3027831	SUPPORT,ANTENNA ASS	1
79	PCHZZ	80063	A3027747-1	PACKING PREFORMED	1
80	PAHZZ	80063	A3027757	SPRING,COMPRESSION	1
81	XBHZZ	80063	A3027738	WASHER,FLAT	1

82	PAHZZ	80063	A3027056-1	RING,RETAINING	1
83	PAHZZ	80063	A3027777	SUPPORT CONTACT	1
84	PAHZZ	96906	MS21209C0220	INSERT,SCREW THREAD	1
85	PAHZZ	80063	A3026757-43	CONNECTOR,CONTACT	1
86	PAHZZ	80063	A3031096	BELL HUB	1
87	PAHZZ	80063	A3031095	ADAPTER	1
88	PAHZZ	81349	M39012/24-0002	CONNECTOR,RECEPTACL	1
END OF FIGURE					

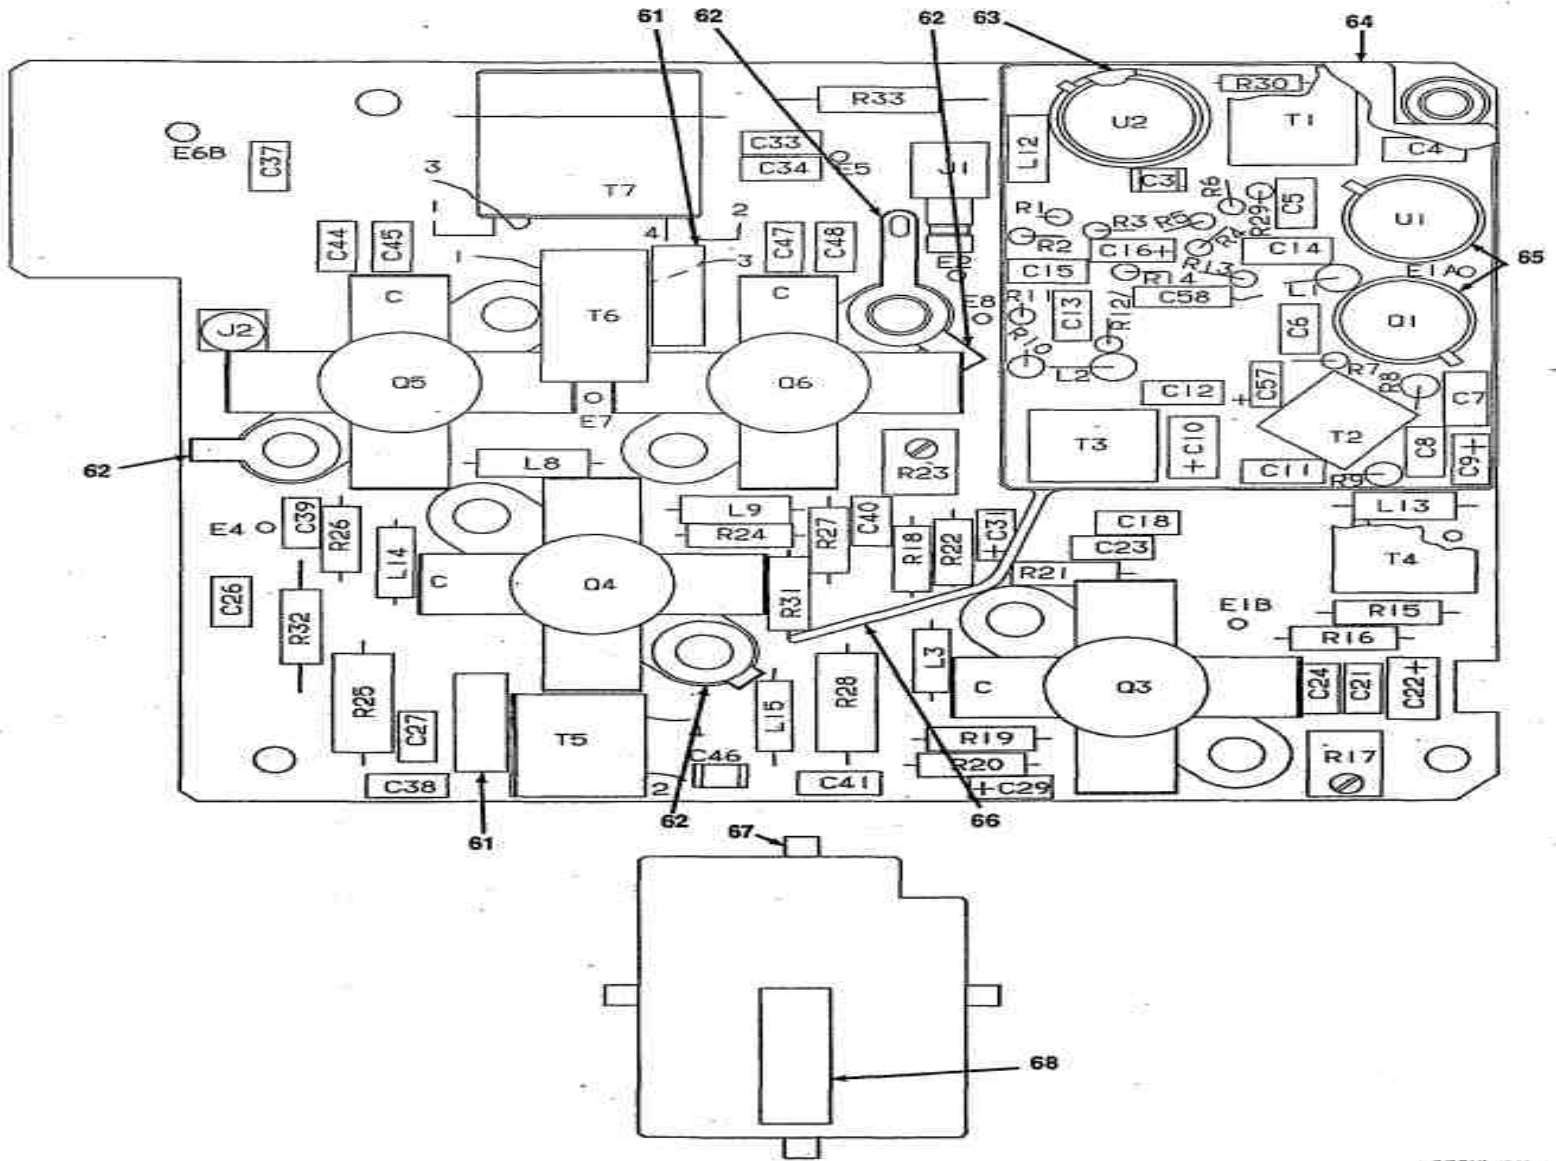

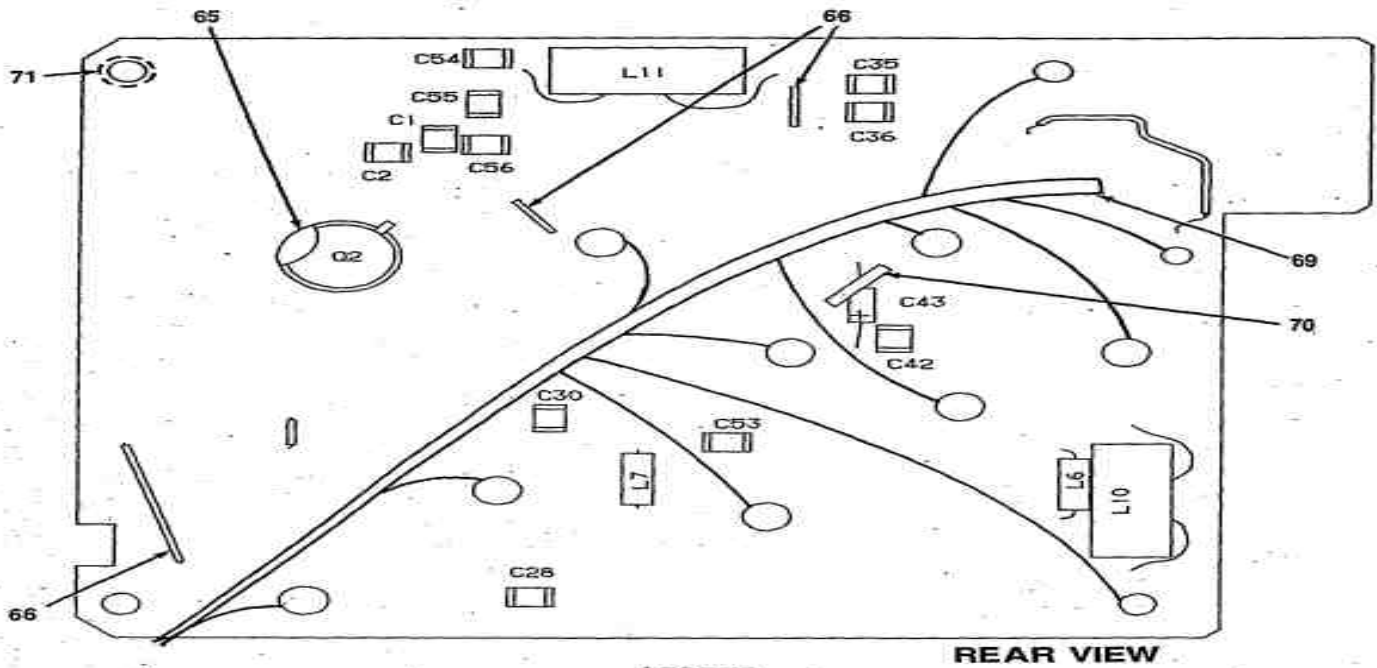

LEGEND

REAR VIEW

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C1	1	C23	3	C44	3	L9	20	R6	34	R25	47
C2	2	C24	3	C45	3	L10	21	R7	35	R26	48
C3	1	C26	8	C46	11	L11	21	R8	36	R27	48
C4	3	C27	3	C47	3			R9	37	R28	47
C5	3	C28	1	C48	3	L12	23	R10	38	R29	34
C6	3	C29	5	C53	1	L13	24	R11	39	R30	49
C7	4	C30	1	C54	12	L14	25	R12	40	R31	50
C8	3	C31	5	C55	13	L15	25	R13	41	R32	51
C9	5	C33	3	C56	12	Q1	26	R14	41	R33	51
C10	6	C34	3	C57	14	Q2	26	R15	42	T1	52
C11	3	C35	1	C58	15	Q3	27	R16	42	T2	53
C12	3	C36	1	J1	16	Q4	28	R17	43	T3	54
C13	3	C37	8	J2	17	Q5	29	R18	44	T4	55
C14	7	C38	3	L1	18	Q6	29	R19	45	T5	56
C15	3	C39	9	L2	18	R1	30	R20	45	T6	57
C16	5	C40	9	L3	19	R2	31	R21	45	T7	58
C18	3	C41	3	L6	19	R3	32	R22	45	U1	59
C21	3	C42	1	L7	19	R4	32	R23	46	U2	60
C22	6	C43	10	L8	20	R5	33	R24	42		

* Select At Test

ITEM 22 NOT USED


CEONL-013

FIGURE 6 RF Power Amplifier CCA. A1A2A1A2 (A3027322-1)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020101 RF POWER AMPLIFIER CCA A1A2A1A2 (A3027322-1)	
				FIG.6	
1	PAHZZ	A3026	4-93969.0000	CAPACITOR, FIXED, CER	8
2	PAHZZ	80063	A3027501-10	CAPACITOR	1
3	PAHZZ	81349	M39014/01-1593	CAPACITOR, FIXED, CER	21
4	PAHZZ	80063	A3026715-4	CAPACITOR, FIXED, MIC	1
5	PAHZZ	80063	A3026718-23	CAPACITOR, FIXED, TAN	4
6	PAHZZ	80063	A3026718-13	CAPACITOR, FIXED, TAN	2
7	PAHZZ	80063	A3026714-2	CAPACITOR, FIXED, ELE	1

8	PAHZZ	81349	M39014-02-1419	CAPACITOR,FIXED,CER	2
9	PAHZZ	81349	M39014-01-1563	CAPACITOR,FIXED CER	2
10	PAHZZ	80063	A3030088-2	CONDENSER,2.2UF 4V	1
11	PAHZZ	80063	A3030084-83	CAPACITOR,FIXED,POR	1
12	PAHZZ	29990	ATC100A320F50X	CAPACITOR,FIXED,FOR	2
13	PAHZZ	29990	ATC100A160FC50X	CAPACITOR,FIXED,CER	1
14	PAHZZ	F2220	MT4R22UF15V20%	CAPACITOR,FIXED,TAN	1
15	PAHZZ	80063	CM04FD910G03	CAPACITOR,FIXED,MIC	1
16	PAHZZ	80063	A3030166	CONNECTOR,COAXIAL	1
17	PAHZZ	98291	51-451-0000	CONNECTOR,RECEPTACL	1
18	PAHZZ	96906	MS75084-3	COIL,RADIO FREQUENC	2
19	PAHZZ	96906	MS75084-4	COIL,RADIO FREQUENC	3
20	PAHZZ	96906	MS75084-12	COIL,RADIO FREQUENC	2
21	PAHZZ	80063	A3031337	INDUCTOR	1
22	XBHZZ	80063	A3026726-1	COIL	1
23	PAHZZ	80063	A3030136	TRANSFORMER	1
24	PAHZZ	96906	MS75085-7	COIL,RADIO FREQUENC	1
25	PAHZZ	96906	MS75083-1	COIL,RADIO FREQUENC	2
26	PAHZZ	80063	A3030185	TRANSFORMER	2
27	PAHZZ	80063	A3030189	TRANSISTOR	1
28	PAHZZ	80063	A3026792	SEMICONDUCTOR DEVIC	1
29	PAHZZ	80063	A3030719	TRANSISTOR	2
30	PAHZZ	81349	RCR05G510JS	RESISTOR,FIXED,COMP	1
31	PAHZZ	81349	RCR05G153JS	RESISTOR,FIXED,COMP	1
32	PAHZZ	81349	RCR05G513JS	RESISTOR,FIXED,COMP	2
33	PAHZZ	80063	A3030083-1	THERMISTOR	1
34	PAHZZ	81349	RCR05G681JS	RESISTOR,FIXED,COMP	2
35	PAHZZ	81349	RCR05G821JS	RESISTOR,FIXED,COMP	1
36	PAHZZ	81349	RCR07G6R8JS	RESISTOR,FIXED,COMP	1
37	PAHZZ	81349	RCR07G201JS	RESISTOR,FIXED,COMP	1
38	PAHZZ	81349	RWR81S3320FR	RESISTOR,FIXED,WIR	1
39	PAHZZ	81349	RCR05G621JS	RESISTOR,FIXED,COMP	1
40	PAHZZ	81349	RCR07G750JS	RESISTOR,FIXED,COMP	1
41	PAHZZ	81349	RCR05G100JS	RESISTOR,FIXED,COMP	2
42	PAHZZ	81349	RCR07G151JS	RESISTOR,FIXED,COMP	3
43	PAHZZ	81349	RJR26FW201P	RESISTOR,VARIABLE-N	1
44	PAHZZ	81349	RCR07G301JS	RESISTOR,FIXED,COMP	1
45	PAHZZ	81349	RCR07G5R1JS	RESISTOR,FIXED,COMP	4

46	PAHZZ	81349	RJR26FW102R	RESISTOR,VARIABLE,N	1
47	PAHZZ	81349	RCR2061R5JS	RESISTOR,FIXED,COMP	2
48	PAHZZ	81349	RCR07G120JS	RESISTOR,FIXED,COMP	2
49	PAHZZ	81349	RCR05G240JS	RESISTOR,FIXED,COMP	1
50	PAHZZ	81349	RCR07G181JS	RESISTOR,FIXED,COMP	1
51	PAHZZ	81349	RCR07G3R6JS	RESISTOR,FIXED,COMP	2
52	PAHZZ	80063	A3030094	TRANSFORMER	1
53	PAHZZ	80063	A3030095	TRANSFORMER	1
54	PAHZZ	80063	A3030096	TRANSFORMER	1
55	PAHZZ	80063	A3030097	TRANSFORMER	1
56	PAHZZ	80063	A3030098	TRANSFORMER	1
57	PAHZZ	80063	A3030099	TRANSFORMER	1
58	XBHZZ	80063	A3030100	TRANSFORMER	1
59	PAHZZ	80063	A3030201-2	INTEGRATED CIRCUIT	1
60	PAHZZ	80063	A3030202-1	INTEGRATED CIRCUIT	1
61	PAHZZ	80063	A3027975	SUPPORT ASSEMBLY	2
62	PAHZZ	80063	A3026908-5	TERMINAL, LUG	4
63	PAHZZ	80063	A3026951-1	INSULATOR,TRANSISTO	1
64	XBHZZ	80063	A3027885	COVER	1
65	PAHZZ	81349	M38527/02-017D	MOUNTING PAD,ELECTR	3
66	PAHZZ	80063	A3026941-3	BUS,CONDUCTOR	4
67	PAHZZ	80063	A3027898	SHIELD,TERMINAL BOA	1
68	XBHZZ	80063	A3031038-185	LABEL	1
69	PAHZZ	80063	A3027693	CABLE ASSEMBLY	1
70	PAHZZ	80063	A3026941-1	BUS,CONDUCTOR	1
71	PAHZZ	80063	A3027793	BUSHING	1
				END OF FIGURE	

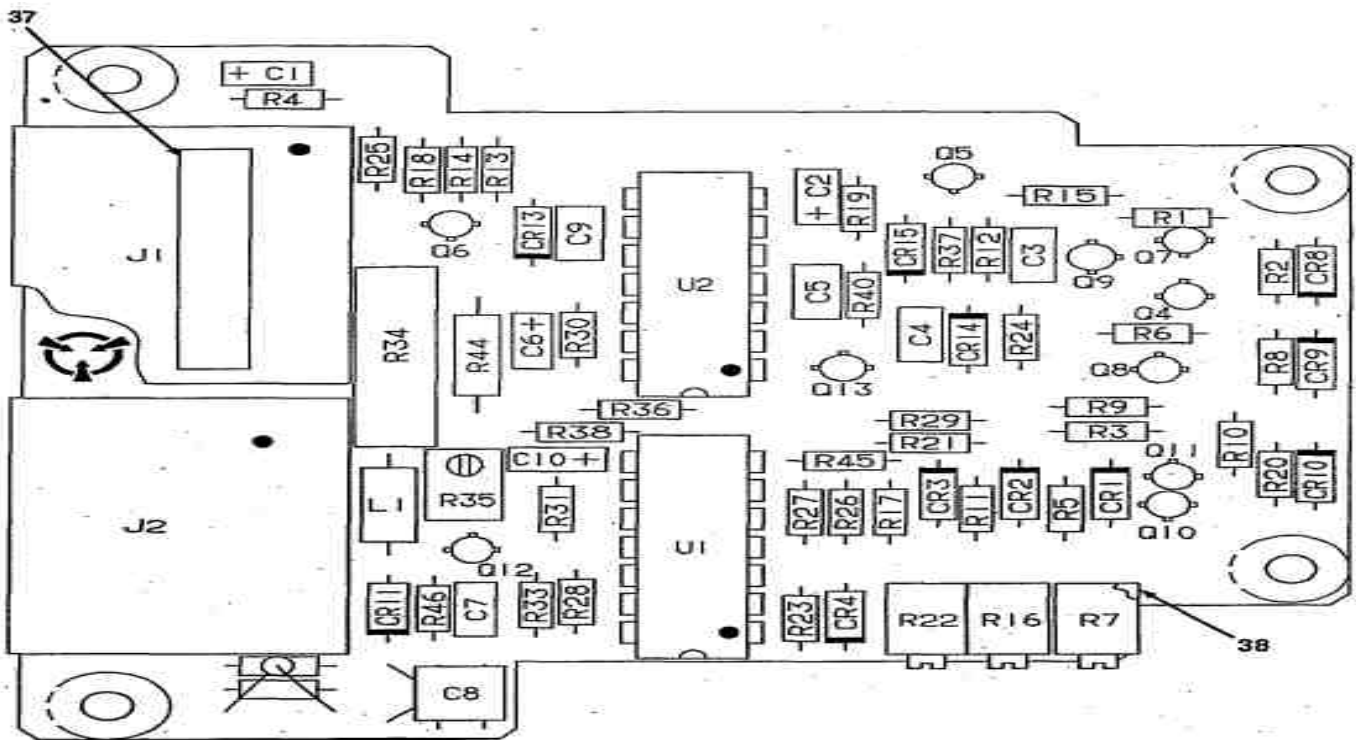

LEGEND


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C2	4	Q4	12	R6	14	R21	16	R36	24
CR2	1	C3	5	Q5	13	R7	19	R22	19	R37	24
CR3	1	C4	5	Q6	13	R8	15	R23	23	R38	30
CR4	1	C5	6	Q7	13	R9	16	R24	20	R39	25
CR5	2	C6	4	Q8	12	R10	14	R25	24	R40	15
CR6	2	C7	6	Q9	13	R11	18	R26	16	R41	14
CR7	3	C8	7	Q10	12	R12	20	R27	23	R42	31
CR8	1	C9	6	Q11	13	R13	15	R28	24	R43	32
CR9	1	C10	8	Q12	12	R14	21	R29	25	R44	33
CR10	1	J1	9	Q13	13	R15	15	R30	26	R45	23
CR11	1	J2	9	R1	14	R16	19	R31	27	R46	34
CR13	1	L1	10	R2	15	R17	18	R32	24	U1	35
CR14	1	Q1	11	R3	16	R18	22	R33	24	U2	36
CR15	1	Q2	11	R4	17	R19	17	R34	28		
C1	4	Q3	11	R5	18	R20	15	R35	29		

CEONL-014


FIGURE 7 RF Power Control CCA A1A2A1A1 (A3027344)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020102 RF POWER CONTROL CCA A1A2A1A1 (A3027344)	
				FIG. 7	
1	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	11
2	PAHZZ	04713	BAV70	SEMICONDUCTOR DEVIC	2
3	PAHZZ	04713	BAV99	SEMICONDUCTOR DEVIC	1
4	PAHZZ	31433	T370C225M020AS	CAPACITOR, FIXED, ELE	3
5	PAHZZ	81349	M39014/01-1593	CAPACITOR, FIXED, CER	2
6	PAHZZ	81349	M39014/01-1575	CAPACITOR, FIXED, CER	3
7	PAHZZ	81349	M39014/01-1578	CAPACITOR, FIXED, CER	1


8	PAHZZ	31433	T370C475M020AS	CAPACITOR, FIXED, ELE	1
9	PAHZZ	80063	A3030158-1	CONNECTOR, ELECTRICA	2
10	PAHZZ	96906	MS75084-12	COIL, RADIO FREQUENC	1
11	PAHZZ	04713	MMBF4860	TRANSISTOR	3
12	PAHZZ	05869	750511-1	TRANSISTOR	4
13	PAHZZ	04713	MMT3904	TRANSISTOR	6
14	PAHZZ	81349	RCR05G513JS	RESISTOR, FIXED, COMP	4
15	PAHZZ	81349	RCR05G103JS	RESISTOR, FIXED, COMP	6
16	PAHZZ	81349	RCR05G203.JS	RESISTOR, FIXED, COMP	4
17	PAHZZ	81349	RCR05G220JS	RESISTOR, FIXED, COMP	2
18	PAHZZ	81349	RCR05G205JS	RESISTOR, FIXED, COMP	3
19	PAHZZ	81349	RJR26FX503R	RESISTOR, VARIABLE, N	3
20	PAHZZ	81349	RCR05G102JS	RESISTOR, FIXED, COMP	2
21	PAHZZ	81349	RCR05G123JS	RESISTOR, FIXED, COMP	1
22	PAHZZ	81349	RCR05G822JS	RESISTOR, FIXED, COMP	1
23	PAHZZ	81349	RCR05G512JS	RESISTOR, FIXED, COMP	3
24	PAHZZ	81349	RCR05G104JS	RESISTOR, FIXED, COMP	6
25	PAHZZ	81349	RCR05G183JS	RESISTOR, FIXED, COMP	2
26	PAHZZ	81349	RCR05G101JS	RESISTOR, FIXED, COMP	1
27	PAHZZ	81349	RCR05G562JS	RESISTOR, FIXED, COMP	1
28	PAHZZ	80063	A3031562	RESISTOR	1
29	PAHZZ	81349	RJR26FW202R	RESISTOR, VARIABLE, N	1
30	PAHZZ	81349	RCR05G204JS	RESISTOR, FIXED, COMP	1
31	PAHZZ	81349	RCR05G222JS	RESISTOR, FIXED, COMP	1
32	PAHZZ	56845	1C5001-A3	RESISTOR, THERMAL	1
33	PAHZZ	81349	RCR07G101JS	RESISTOR, FIXED, COMP	1
34	PAHZZ	81349	RCR05G151JS	RESISTOR, FIXED, COMP	1
35	PAHZZ	07933	RM3503ADC3	MICROCIRCUIT, LINEAR	1
36	PAHZZ	81349	M38510/05051BCB	MICROCIRCUIT, DIGITA	1
37	XBHZZ	80063	A3031038-186	LABEL	1
38	PAHZZ	80063	A3031041	PAD	1
				END OF FIGURE	

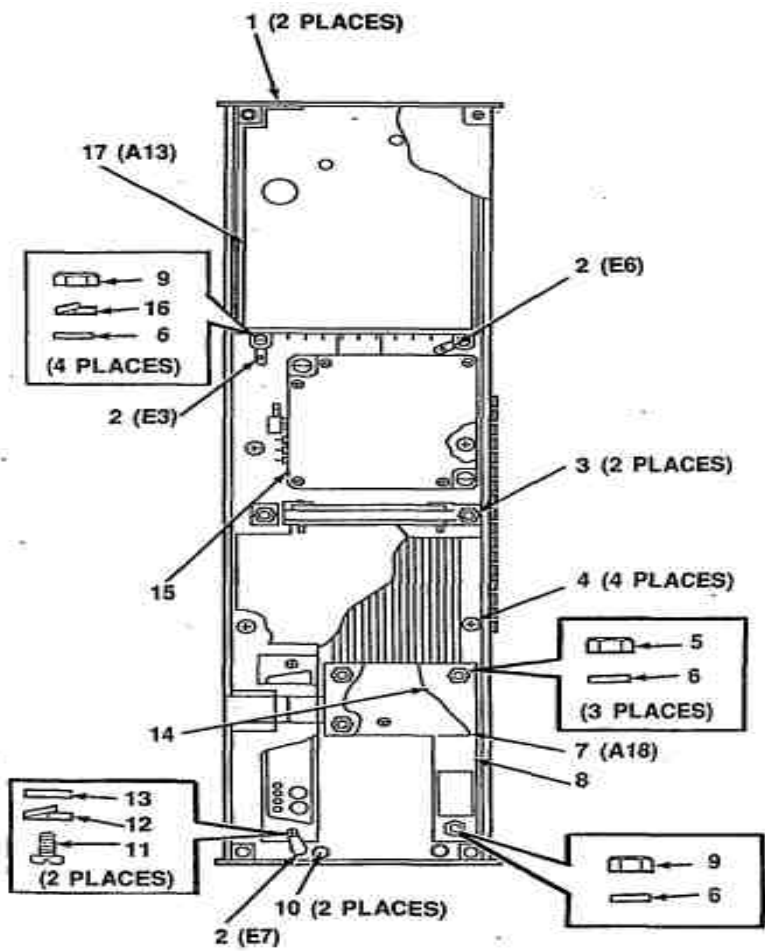


RIGHT SIDE VIEW



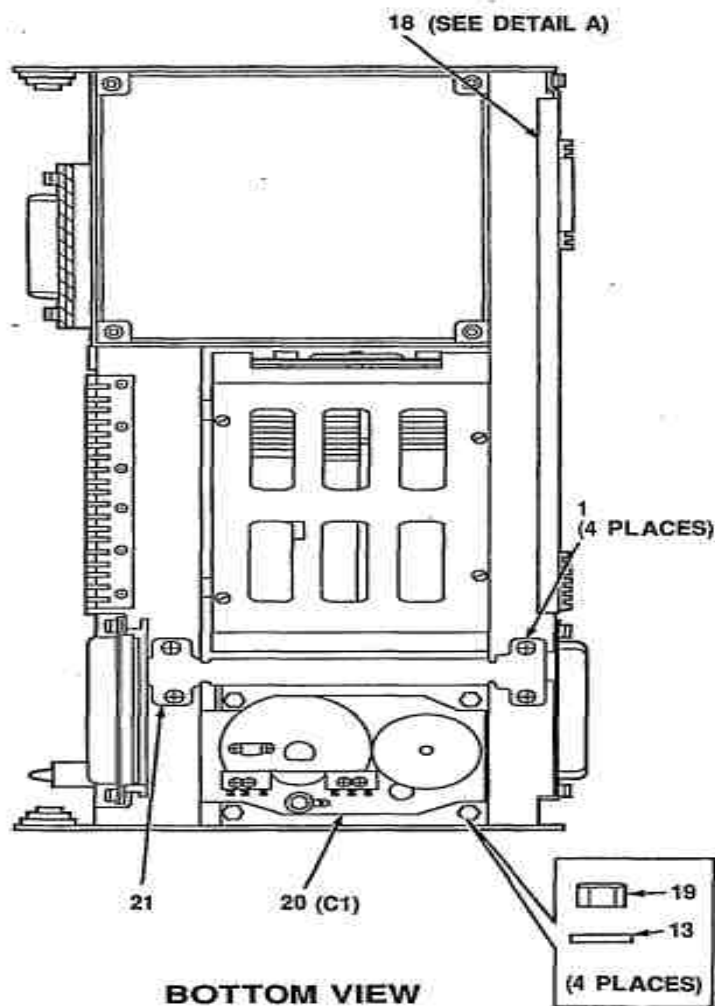



BOTTOM VIEW

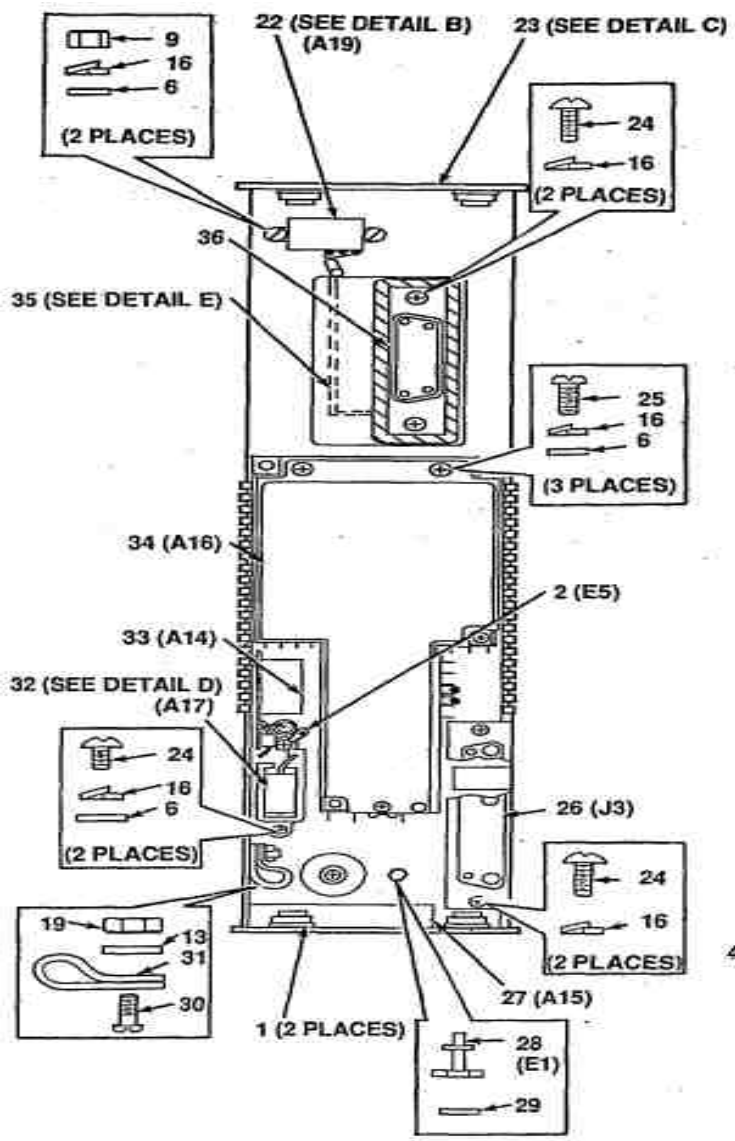


LEFT SIDE VIEW

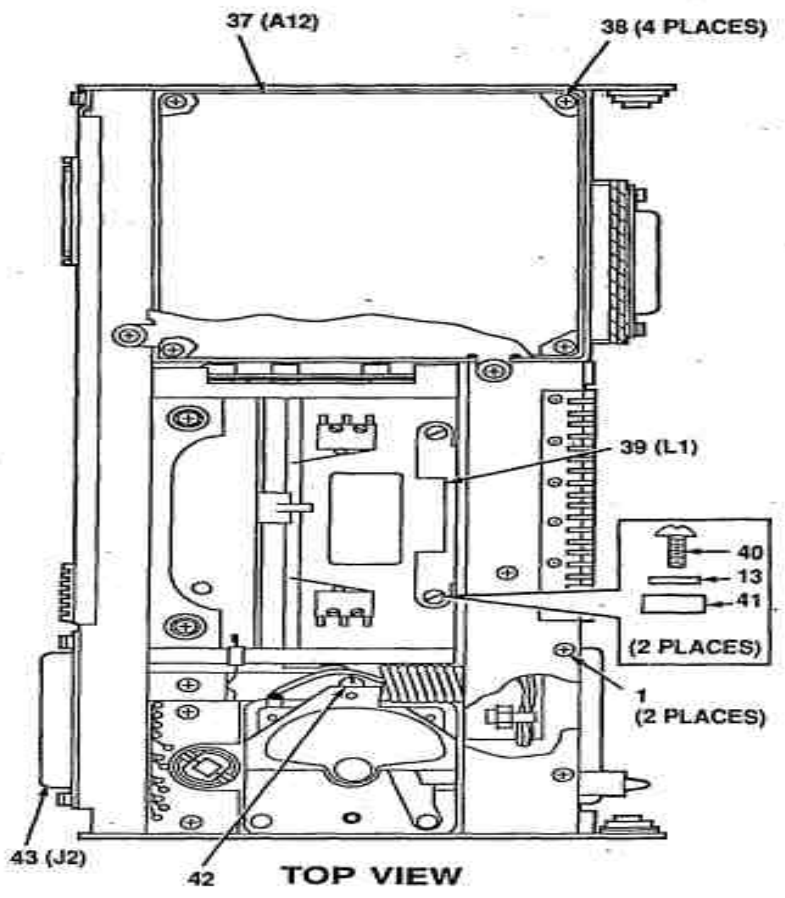

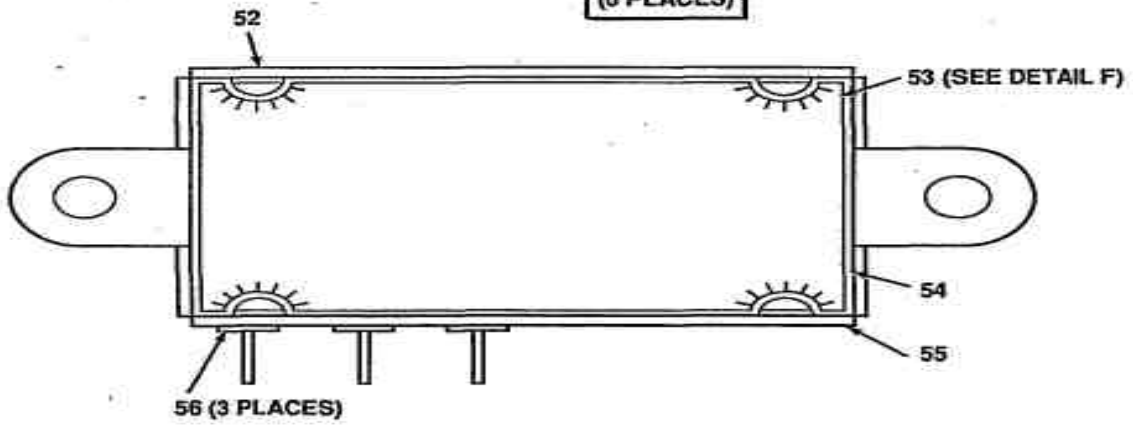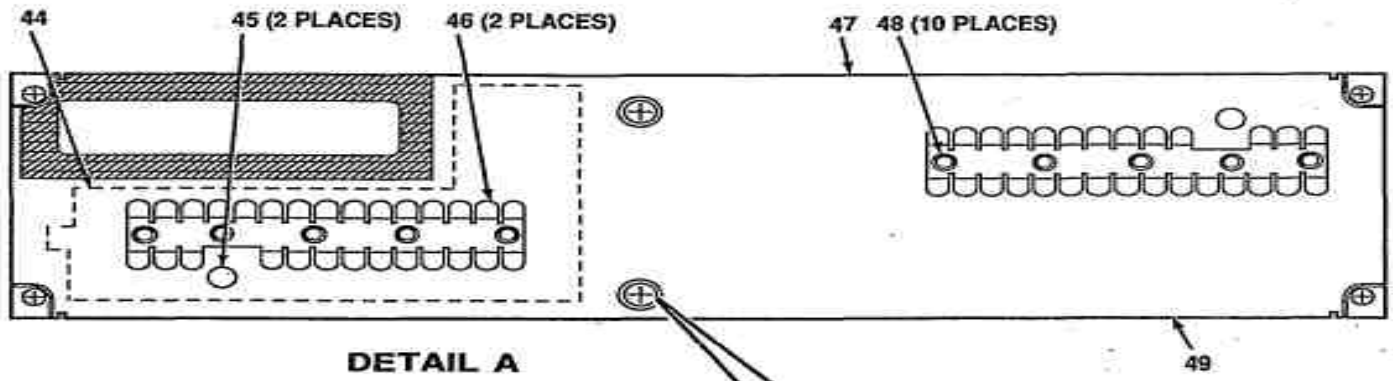


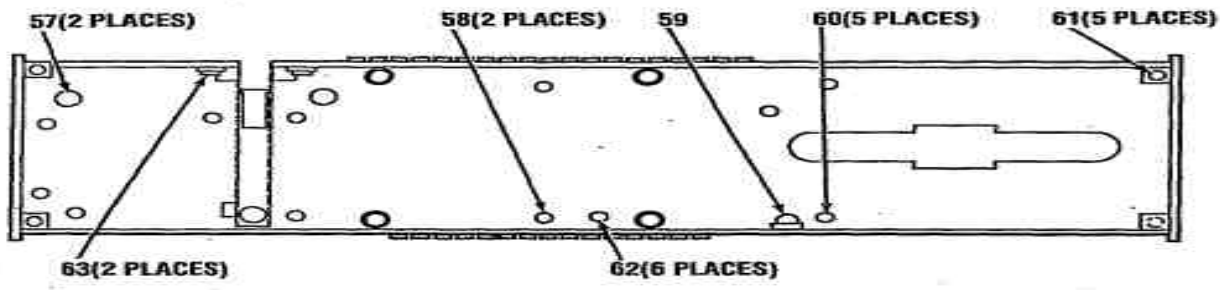


TOP VIEW

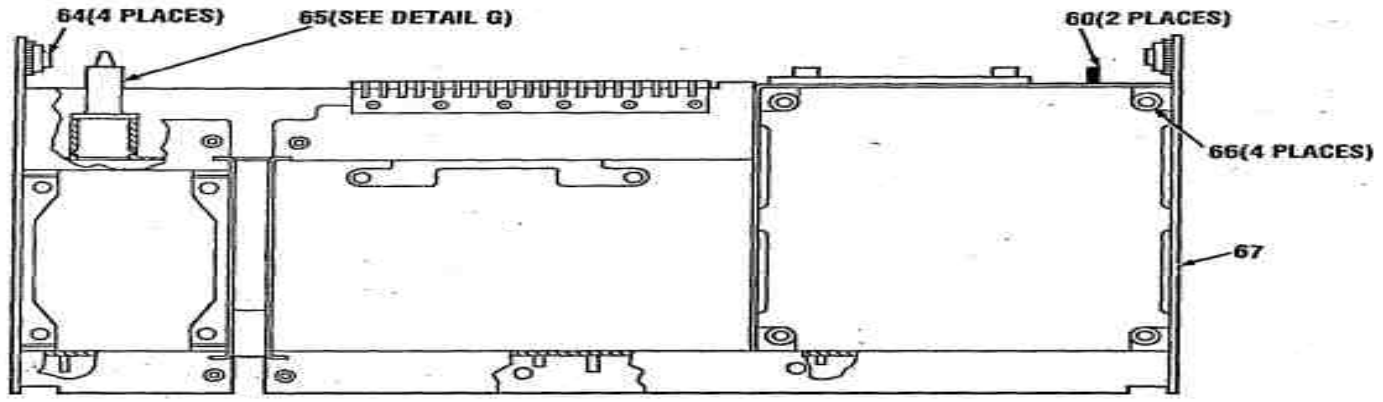


SIDE VIEW

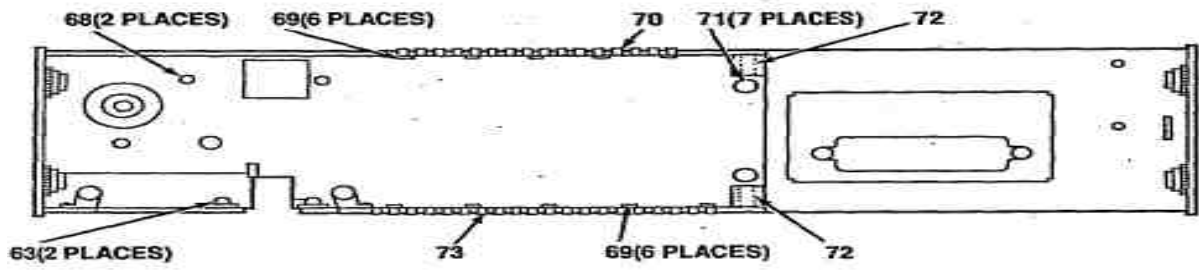


**BOTTOM VIEW
DETAIL C**

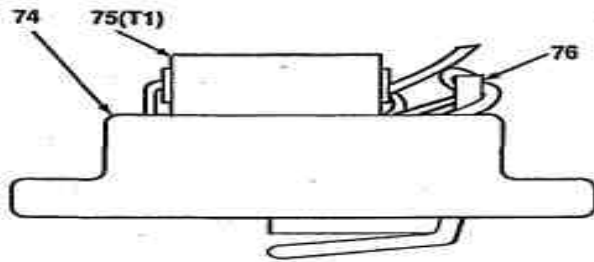

DETAIL D

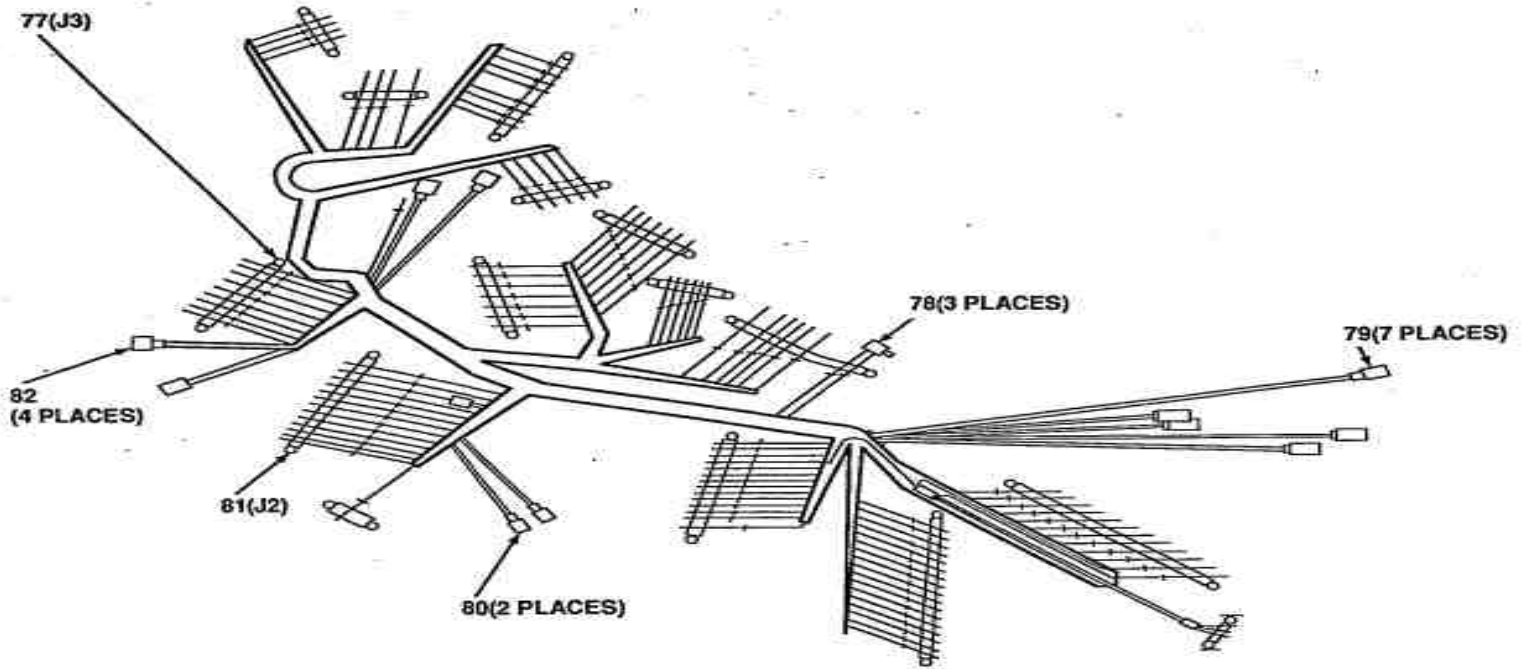


DETAIL E

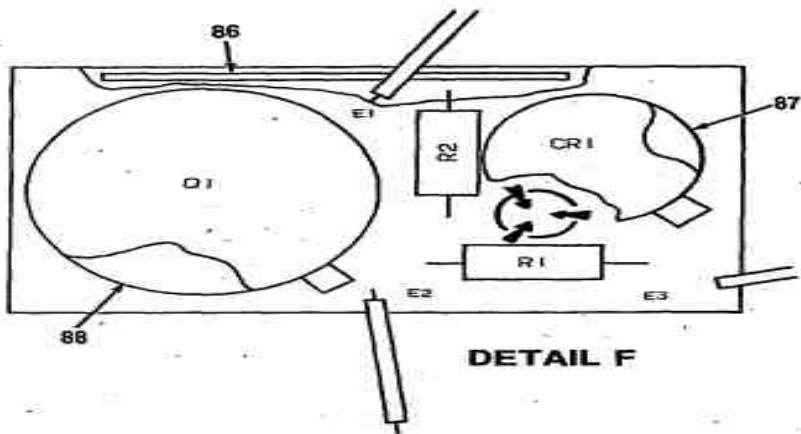

DETAIL F

LEGEND

REF. DES.	ITEM NO.
CR1	83
Q1	84
R1	85
R2	85

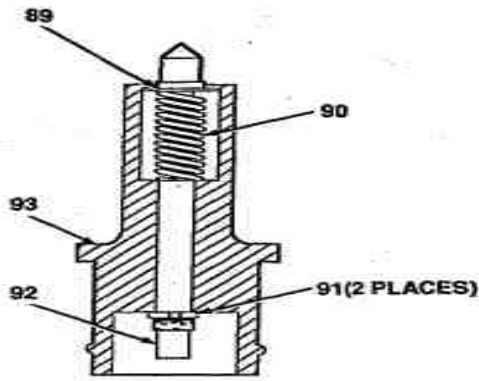

DETAIL G

CEONL-020


FIGURE 8 Receiver Exciter Chassis A1A2A20 (A3026000)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 010202 RECEIVER/EXCITER CHASSIS A1A2A20 (A3026000)	
				FIG.8	
1	PAHZZ	96906	MS51959-2	SCREW, MACHINE	10
2	PAHZZ	80063	A3026908-4	TERMINAL,LUG	4
3	PAHZZ	80063	A3027749	INSERT,SCREW THREAD	2
4	XBHZZ	A3423	3-71492-025	SCREW,MACHINE	4
5	PAHZZ	72962	79-1660-26	NUT,SELF-LOCKING,HE	3
6	PAHZZ	A3026	3-10285.006//C	WASHER,FLAT	15

7	PAHLL	80063	A3027685	CIRCUIT CARD ASSEMB (SEE FIG. 22 FOR BREAKDOWN)	1
8	XBHZZ	80063	A3031410	GUARD	1
9	PAHZZ	80063	A3027731	NUT,PLAIN,ROUND	7
10	XBHZZ	80063	A3027754	SUPPORT	2
11	PAHZZ	96906	MS51957-13	SCREW,MACHINE	2
12	XBHZZ	A3026	3-10311-004	WASHER,LOCK	2
13	PAHZZ	A3026	3-10285.008//C	WASHER,FLAT	9
14	XBHZZ	80063	A3030943	INSULATOR	1
15	PAHZZ	80063	A3030231	OSCILLATOR,RADIO FR	1
16	XBHZZ	A3026	3-10311-002	WASHER,LOCK	15
17	XBHLD	80063	A3027672	POWER SUPPLY (SEE FIG. 18 FOR BREAKDOWN)	1
18	XBHLL	80063	A3027955	COVER ASSEMBLY,LOWE	1
19	PAHZZ	10001	2016315PC3	NUT,SELF-LOCKING,HE	5
20	XBHLL	80063	A3027653	VARIABLE CAPACITOR (SEE FIG. 15 FOR BREAKDOWN)	1
21	XBHZZ	80063	A3027884	COVER	1
22	XBHLL	80063	A3031305	HOUSING ASSEMBLY-(A	1
23	XBHLL	80063	A3027323	SUPPORT ASSEMBLY,CH	1
24	PAHZZ	96906	MS51957-4	SCREW,MACHINE	6
25	PAHZZ	96906	MS51957-3	SCREW,MACHINE	3
26	PAHZZ	71468	DDMY-36W4S	CONNECTOR,ELECTRICA	1
27	PAHLL	80063	A3027658	FILTER MODULE ASSEM (SEE FIG. 9 FOR BREAKDOWN)	1
28	PAHZZ	80063	A3027826	TERMINAL,STUD	1
29	PAHZZ	80063	A3027732-1	WASHER,EXTERNAL TOO	1
30	PAHZZ	96906	MS51959-15	SCREW,MACHINE	1
31	PAHZZ	80205	NAS1397P2B	CLAMP,LOOP	1
32	XBHLL	80063	A3030151	TRANSFORMER ASSEMBL	1
33	PAHLD	80063	A3027346	CIRCUIT CARD ASSEMB (SEE FIG. 20 FOR BREAKDOWN)	1
35	XBHLL	80063	A3027353	CABLE ASSEMBLY	1
36	PCHZZ	80063	A3027873	GASKET (MAKE FROM A3026999-3)	1
37	PAHLD	80063	A3027352	BACKPLANE ASSEMBLY (SEE FIG. 17 FOR BREAKDOWN)	1
38	PAHZZ	96906	MS24693C1	SCREW,MACHINE	4
39	PAHLL	80063	A3030152	COIL ASSEMBLY (SEE FIG. 21 FOR BREAKDOWN)	1

40	PAHZZ	96906	MS51957-17	SCREW,MACHINE	2
41	XBHZZ	80063	A3031107	BUSHING	2
42	PAHZZ	80063	A3026941-3	BUS,CONDUCTOR	1
43	PAHZZ	96214	531740-1	CONNECTOR,RECEPTACL	1
44	XBHZZ	80063	A3027895	PLATE,MOUNTING,GROM	1
45	XBHZZ	80063	A3027788	BUSHING	2
46	PAHZZ	80063	A3027976	GROUNDING CONTACT	2
47	XBHZZ	80063	A3027843	COVER-CHASSIS,LOWER	1
48	PAHZZ	A2728	OU-20.20	GROMMET,METALLIC	10
49	XBHLL	80063	A3027956	COVER ASSEMBLY	1
50	PAHZZ	80063	A3027729	SCREW,MACHINE-PAN H	6
51	PAHZZ	A3026	3-10285.007//C	WASHER,FLAT	6
52	XBHZZ	80063	A3031038-204	LABEL	1
53	PAHLL	80063	A3031304	CIRCUIT CARD ASSEMB	1
54	XBHZZ	80063	A3031306	HOUSING	1
55	XBHZZ	80063	A3034571-2	LABEL, ELECTROSTATI	1
56	PAHZZ	80063	A3026911	TERMINAL,FEEDTHRU	3
57	PAHZZ	96906	MS21209C0415	INSERT,SCREW THREAD	2
58	PAHZZ	81349	M63540/1-6C	STUD,SELF-LOCKING	2
59	PAHZZ	72962	79NCFMA2-40	NUT,SELF-LOCKING,CL	1
60	PAHZZ	81349	M63540/1-1C	STUD,SELF-LOCKING	7
61	PAHZZ	80063	A3031334-2	SCREW,INSERT THERAD	5
62	PAHZZ	81349	M63540/1-2C	STUD,SELF-LOCKING	6
63	PAHZZ	72962	79NCFM1-26	NUT,SELF-LOCKING,CL	4
64	PAHZZ	83324	M45938/13-42	INSERT,SCREW THREAD	4
65	XBHLL	80063	A3027952	PLUNGER ASSEMBLY	1
66	XBHZZ	80063	A3027785	BUSHING	4
67	XBHZZ	80063	A3027949	SUPPORT ASSEMBLY	1
68	PAHZZ	46384	F-256-1	NUT,PLAIN,CLINCH	2
69	PAHZZ	A2728	OU-20.25	EYELET,METALLIC.;	11
70	PAHZZ	80063	A3030901	GROUNDING CONTACT	1
71	PAHZZ	96906	MS21209C0220	INSERT,SCREW THREAD	7
72	PAHZZ	96906	MS21209C0820	INSERT,SCREW THREAD	2
73	PAHZZ	80063	A3027880	CONTACT,ELECTRICAL	1
74	XBHLL	80063	A3027780	SUPPORT	1
75	PAHZZ	80063	A3030093	TRANSFORMER	1
76	XBHZZ	80063	A3027821	TURRET	1
77	PAHZZ	71468	DDMY-36W4S	CONNECTOR,ELECTRICA	1

78	PAHZZ	07187	4022892	CONNECTOR,PLUG,ELEC	3
79	PAHZZ	80063	SM-A-935134	CONNECTOR,RECEPTACL	7
80	PAHZZ	71468	DM53741-5000	CONTACT,ELECTRICAL	2
81	PAHZZ	96214	531740-1	CONNECTOR,RECEPTACL	1
82	PAHZZ	18876	9073891-3	CONTACT,ELECTRICAL	4
83	PAHZZ	12969	ID102	SEMICONDUCTOR DEVIC	1
84	PAHZZ	81483	IRFF9131	TRANSISTOR-P CHANNE	1
85	PAHZZ	81349	RCR05G102JS	RESISTOR,FIXED,COMP	2
86	XBHZZ	80063	A3031038-205	LABEL	1
87	PAHZZ	13103	445214-102	INSULATOR--TRANSIST	1
88	PAHZZ	81349	M38527/02-017D	MOUNTING PAD,ELECTR	1
89	PAHZZ	A3026	3-10285.008//C	WASHER,FLAT	1
90	PAHZZ	80063	A3027756	SPRING,HELICAL,COMP	1
91	PAHZZ	80063	A3027056-1	RING,RETAINING	2
92	PAHZZ	80063	A3027818	CONTACT,ELECTRICAL	1
93	PAHZZ	80063	A3027778	SUPPORT	1
				END OF FIGURE	

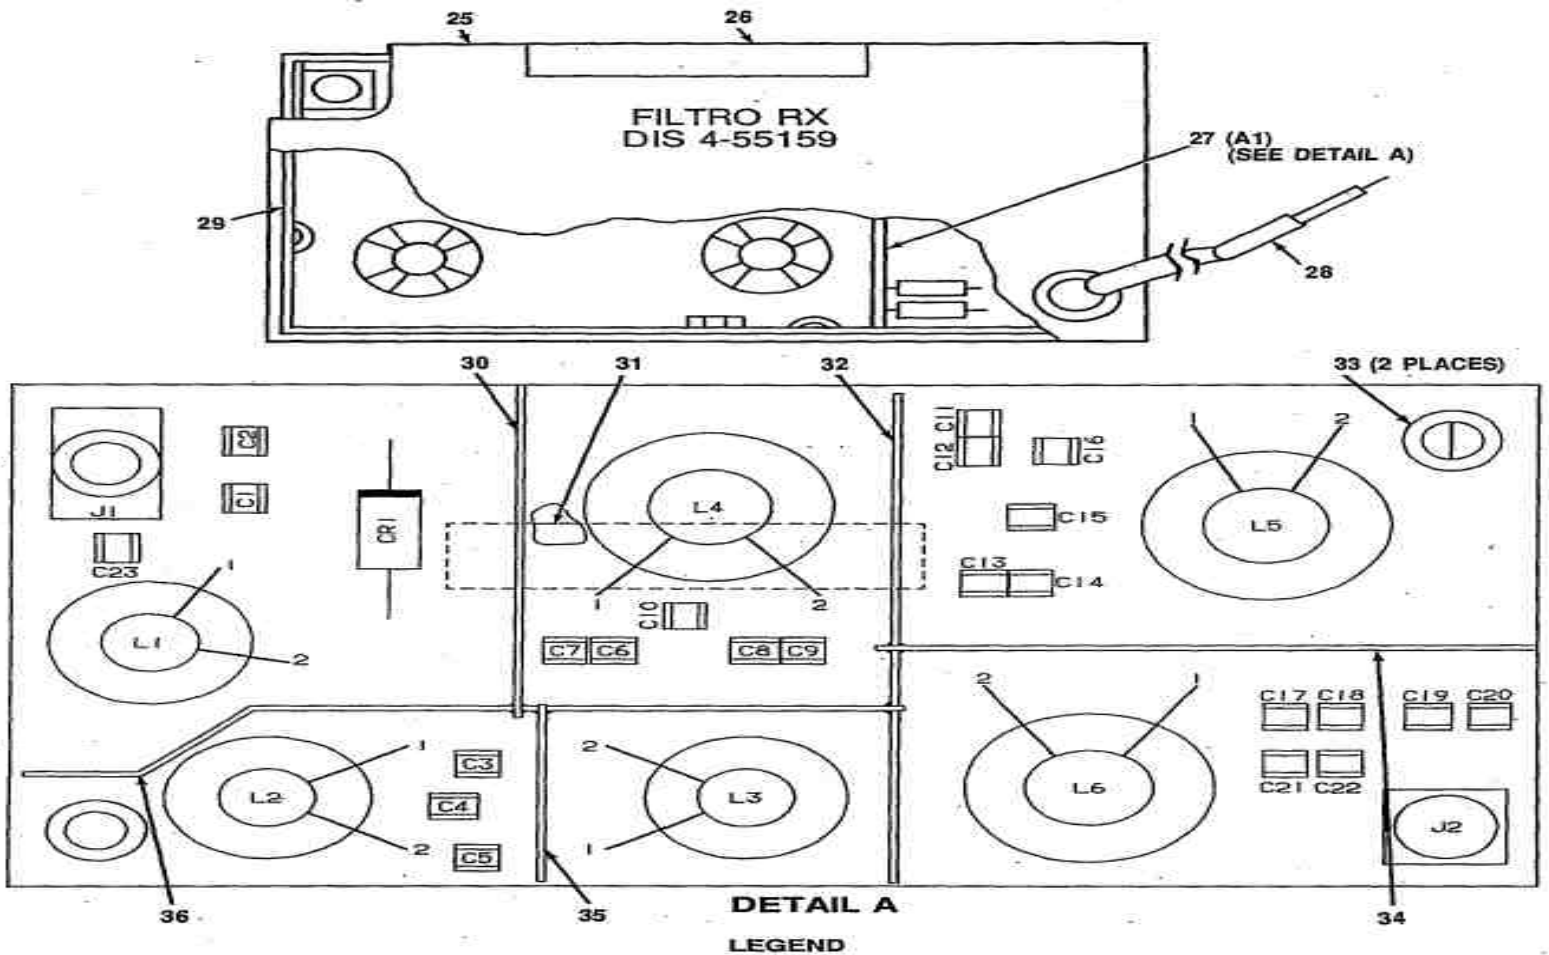

DETAIL A

LEGEND



REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C6	7	C12	11	C18	8	J1	17	L5	23
C1	2	C7	8	C13	12	C19	11	J2	18	L6	24
C2	3	C8	9	C14	13	C20	7	L1	19		
C3	4	C9	10	C15	14	C21	15	L2	20		
C4	5	C10	8	C16	13	C22	8	L3	21		
C5	6	C11	10	C17	13	C23	16	L4	22		

CEONL-021


FIGURE 9 Filter Module Assy A1A2A20A15 (A3027658)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020201 FILTER MODULE ASSEMBLY A1A2A20A15 (A3027658)	
				FIG. 9	
1	PAHZZ	14099	SG6025	SEMICONDUCTOR DEVIC	1
2	PAHZZ	29990	ATC100A9R1BC50X	CAPACITOR, FIXED, CER	1
3	PAHZZ	80063	A3030084-82	CAPACITOR, FIXED, POR	1
4	PAHZZ	29990	ATC700A101FC50X	CAPACITOR, FIXED, CER	1
5	PAHZZ	29990	ATC100A160FC50X	CAPACITOR, FIXED, CER	1
6	PAHZZ	29990	ATC700A111FC50X	CAPACITOR, FIXED, CER	1
7	PAHZZ	29990	ATC700A271FC50X	CAPACITOR, FIXED, CER	2


8	PAHZZ	29990	ATC700A102FC50X	CAPACITOR, FIXED, CER	4
9	PAHZZ	29990	ATC100A680F50X	CAPACITOR, FIXED, CER	1
10	PAHZZ	29990	ATC700A911FC50X	CAPACITOR, FIXED, CER	2
11	PAHZZ	29990	ATC100A430FC50X	CAPACITOR, FIXED, CER	2
12	PAHZZ	29990	ATC100A240FC50X	CAPACITOR, FIXED, CER	1
13	PAHZZ	29990	ATC700A821FC50X	CAPACITOR, FIXED, CER	3
14	PAHZZ	29990	ATC100A360JC50X	CAPACITOR, FIXED, CER	1
15	PAHZZ	29990	ATC700A681FC50X	CAPACITOR, FIXED, CER	1
16	PAHZZ	29990	ATC100A320F50X	CAPACITOR, FIXED, POR	1
17	PAHZZ	80063	A3030169	TERMINATION--COAX C	1
18	PAHZZ	98291	51-451-0000	CONNECTOR, RECEPTACL	1
19	PAHZZ	80063	A3030120	TRANSFORMER	1
20	PAHZZ	80063	A3030119	TRANSFORMER	1
21	PAHZZ	80063	A3030141	TRANSFORMER	1
22	PAHZZ	80063	A3030116	INDUCTOR	1
23	PAHZZ	80063	A3030117	TRANSFORMER	1
24	PAHZZ	80063	A3030118	INDUCTOR	1
25	XBHZZ	80063	A3030740	COVER	1
26	XBHZZ	80063	A3031038-197	LABEL	1
27	PAHLL	80063	A3027679	CIRCUIT CARD ASSEMB	1
28	PAHZZ	80063	A3027695	CABLE, COAXIAL	1
29	XBHZZ	80063	A3027760	SUPPORT, WELDED	1
30	XBHZZ	80063	A3027774	SHIELD, ELECTRICAL C	1
31	XBHZZ	80063	A3031038-59	LABEL	1
32	XBHZZ	80063	A3027775	PLATE, ELECTRICAL SH	1
33	XBHZZ	80063	A3027797	BUSHING, THREADED	2
34	XBHZZ	80063	A3027772	SUPPORT	1
35	XBHZZ	80063	A3027773	SHIELD	1
36	XBHZZ	80063	A3027771	PLATE, ELECTRICAL SH	1
				END OF FIGURE	

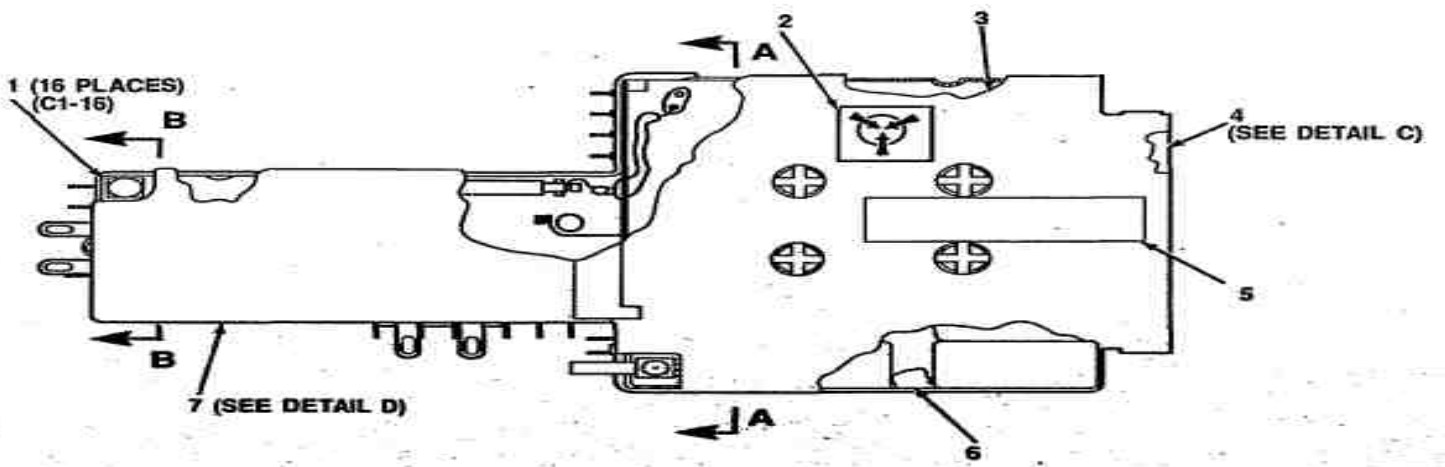

SECTION B-B

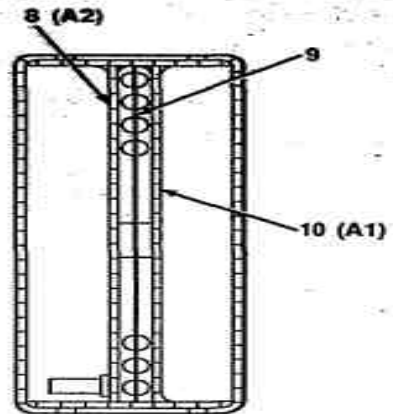

SECTION A-A

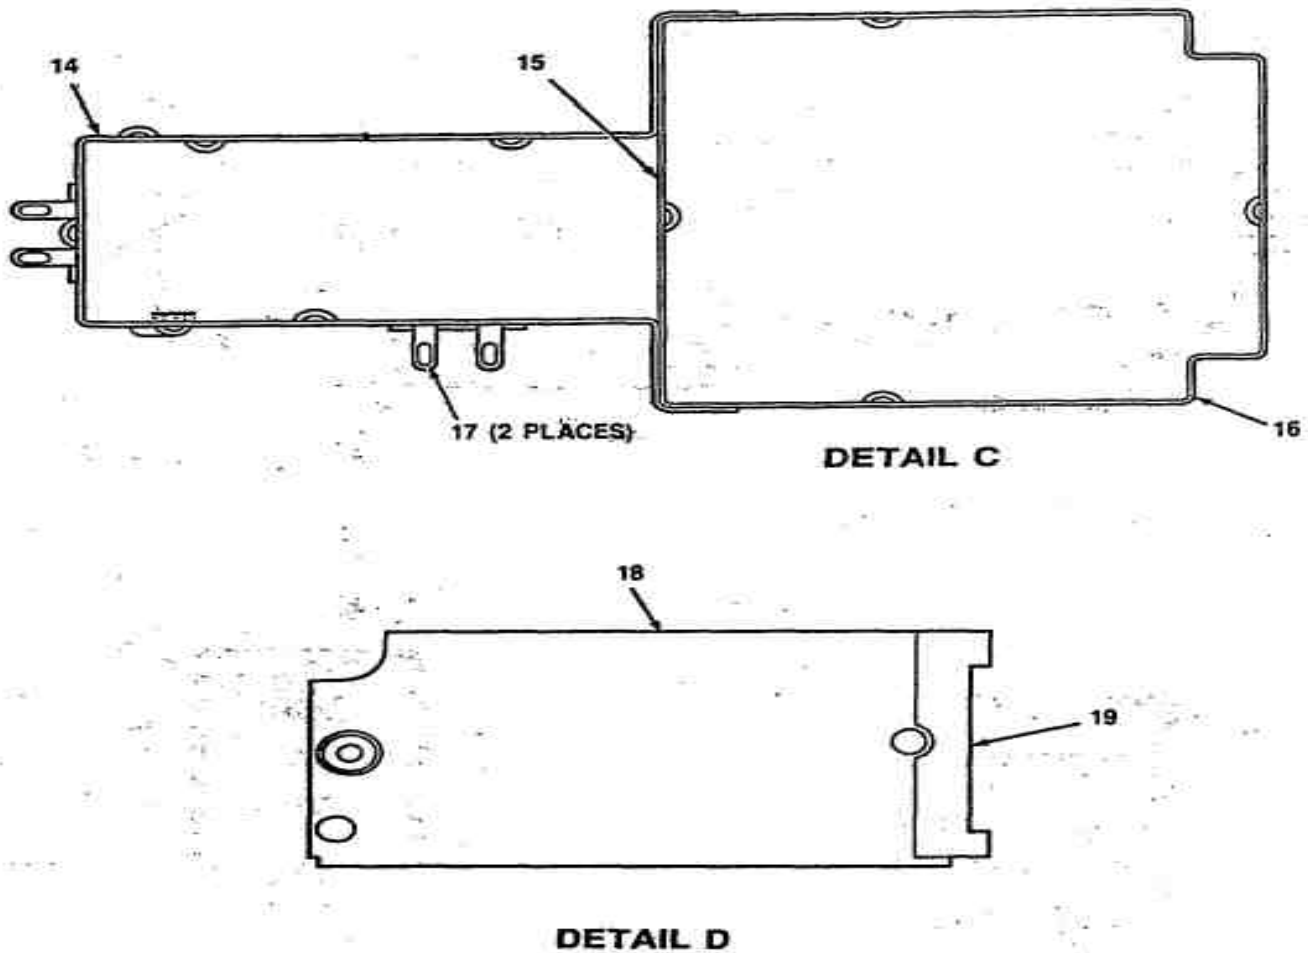


CEONL-023

FIGURE 10 Filter Amplifier Assy A1A2A20A16 (A3027657)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020202 FILTER AMPLIFIER ASSEMBLY A1A2A20A16 (A3027657)	
				FIG.10	
1	PAHZZ	12294	9900-001-6004	FILTER, RADIO FREQUE	16
2	XBHZZ	80063	A3034571-2	LABEL, ELECTROSTATI	1
3	XBHZZ	80063	A3026302	COVER	1
4	XBHLL	80063	A3027951	ENCLOSURE ASSEMBLY	1
5	XBHZZ	80063	A3031038-190	LABEL	1
6	XBHZZ	80063	A3031307	COVER	1
7	XBHLL	80063	A3027974	COVER, HARMONICS FIL	1

8	PAHLL	80063	A3027656	CIRCUIT CARD ASSEMB (SEE FIG. 12 FOR BREAKDOWN)	1
9	PAHZZ	80063	A3031245	INSULATOR	1
10	PAHLL	80063	A3027655	CIRCUIT CARD ASSEMB (SEE FIG. 11 FOR BREAKDOWN)	1
11	PAHLL	80063	A3027659	CIRCUIT CARD ASSEMB (SEE FIG. 14 FOR BREAKDOWN)	1
12	PAHLL	80063	A3027660	CIRCUIT CARD ASSEMB (SEE FIG. 13 FOR BREAKDOWN)	1
13	PAHZZ	80063	A3031308	COVER	1
14	XBHZZ	80063	A3027894	BRACKET, MOUNTING	1
15	XBHZZ	80063	A3027928	SPACER, PLATE	1
16	XBHZZ	80063	A3027893	BRACKET	1
17	PAHZZ	80063	A3027825	TERMINAL, LUG	2
18	XBHZZ	80063	A3027888	COVER	1
19	XBHZZ	80063	A3027804	BUS, CONDUCTOR	1
				END OF FIGURE	

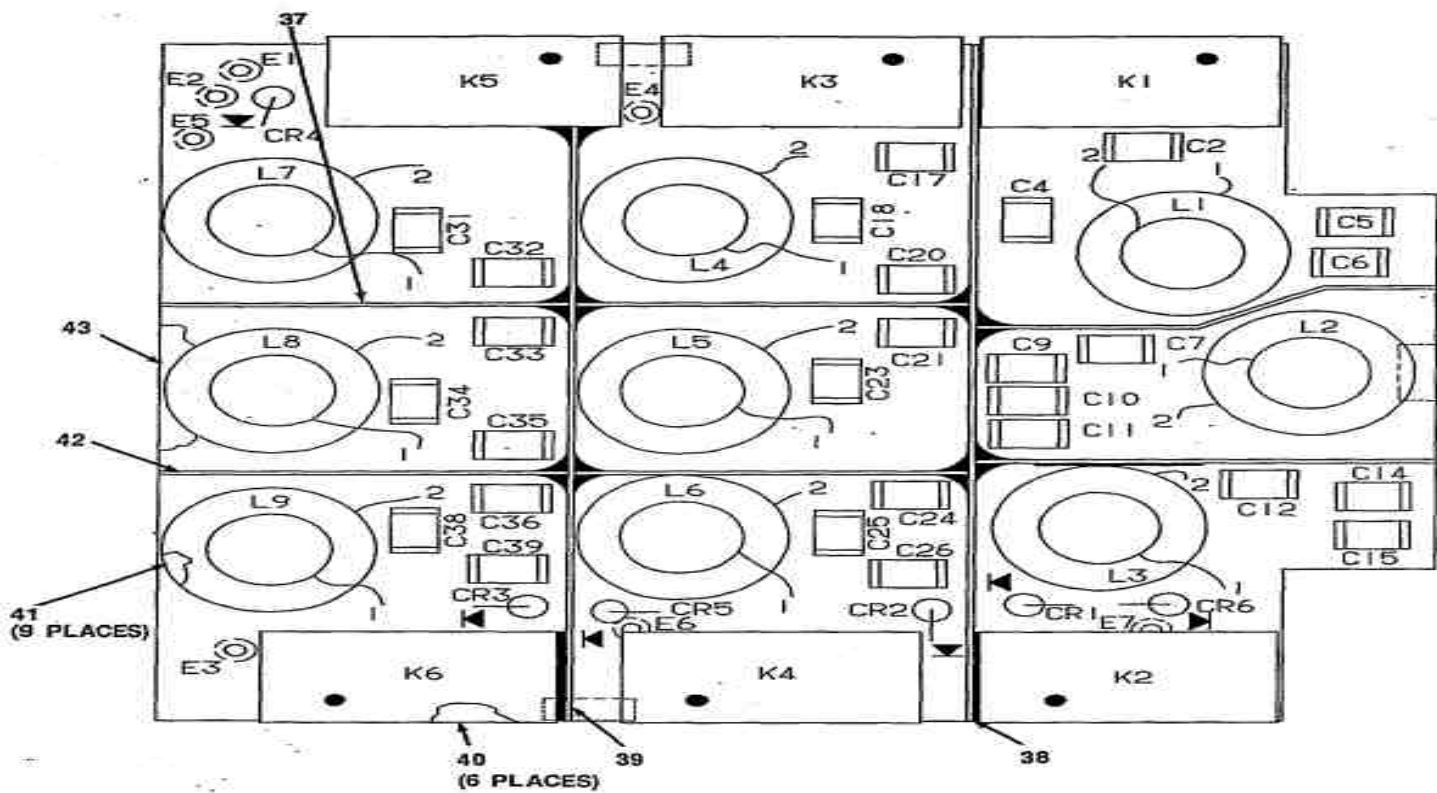

LEGEND


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C5	6	C15	12	C25	19	C36	25	L1	30
CR2	1	C6	7	C16	13	C26	13	C37	26	L2	31
CR3	1	C7	8	C17	14	C27	20	C38	27	L3	32
CR4	1	C8	9	C18	15	C28	21	C39	28	L4	33
CR5	1	C9	8	C19	7	C30	7	K1	29	L5	33
CR6	1	C10	8	C20	12	C31	22	K2	29	L6	34
C1	2	C11	2	C21	16	C32	23	K3	29	L7	35
C2	3	C12	7	C22	17	C33	19	K4	29	L8	35
C3	4	C13	10	C23	17	C34	20	K5	29	L9	36
C4	5	C14	11	C24	18	C35	24	K6	29		

CEONL-024

FIGURE 11 CCA (A3027655)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102020201 CCA (A3027655)	
				FIG.11	
1	PAHZZ	14099	1N6075	SEMICONDUCTOR DEVIC	6
2	PAHZZ	29990	ATC100B301FC200X	CAPACITOR, FIXED, CER	2
3	PAHZZ	29990	ATC100B331FC200X	CAPACITOR, FIXED, CER	1
4	PAHZZ	29990	ATC100B222FC200X	CAPACITOR, FIXED, CER	1
5	PAHZZ	29990	ATC100B910FC500X	CAPACITOR, FIXED, CER	1
6	PAHZZ	29990	ATC100B911FC200X	CAPACITOR, FIXED, CER	1
7	PAHZZ	29990	ATC100B101FC500X	CAPACITOR, FIXED, GLA	4
8	PAHZZ	29990	ATC100B431FC200X	CAPACITOR, FIXED, CER	3

9	PAHZZ	29990	ATC100B360FC200X	CAPACITOR, FIXED, CER	1
10	PAHZZ	29990	ATC100B560FC500X	CAPACITOR, FIXED, CER	1
11	PAHZZ	29990	ATC100B391FC200X	CAPACITOR, FIXED, CER	1
12	PAHZZ	29990	ATC100B221FC200X	CAPACITOR, FIXED, CER	2
13	PAHZZ	29990	ATC100B820FC500X	CAPACITOR, FIXED, CER	2
14	PAHZZ	29990	ATC100B430FC500X	CAPACITOR, FIXED, CER	1
15	PAHZZ	29990	ATC100B151FC300X	CAPACITOR, FIXED, CER	1
16	PAHZZ	29990	ATC100B201FC300X	CAPACITOR, FIXED, CER	1
17	PAHZZ	29990	ATC100B161FC300X	CAPACITOR, FIXED, CER	2
18	PAHZZ	29990	ATC100B471FC200X	CAPACITOR, FIXED, CER	1
19	PAHZZ	29990	ATC100B620FC500X	CAPACITOR, FIXED, GLA	2
20	PAHZZ	29990	ATC100B131FC300X	CAPACITOR, FIXED, CER	2
21	PAHZZ	29990	ATC100B360FC500X	CAPACITOR, FIXED, CER	1
22	PAHZZ	29990	ATC100B5R1BC500X	CAPACITOR, FIXED, CER	1
23	PAHZZ	29990	ATC100B111FC300X	CAPACITOR, FIXED, CER	1
24	PAHZZ	29990	ATC100B181FC300X	CAPACITOR, FIXED, CER	1
25	PAHZZ	29990	ATC100B150FC500X	CAPACITOR, FIXED, CER	1
26	PAHZZ	29990	ATC100B100FC500X	CAPACITOR, FIXED, GLA	1
27	PAHZZ	29990	ATC100B160FC500X	CAPACITOR, FIXED, GLA	1
28	PAHZZ	29990	ATC100B680FC500X	CAPACITOR, FIXED, CER	1
29	PAHZZ	81349	M39016/13-057P	RELAY, ELECTROMAGNET	6
30	PAHZZ	80063	A3030133	TRANSFORMER ASSEMBL	1
31	PAHZZ	80063	A3030134	TRANSFORMER ASSEMBL	1
32	PAHZZ	80063	A3030135	TRANSFORMER ASSEMBL	1
33	PAHZZ	80063	A3030130	TRANSFORMER	2
34	PAHZZ	80063	A3030131	TRANSFORMER	1
35	PAHZZ	80063	A3030122	TRANSFORMER	2
36	PAHZZ	80063	A3030124	TRANSFORMER	1
37	XBHZZ	80063	A3027899	SHIELD, TERMINAL BOA	1
38	XBHZZ	80063	A3027901	SHIELD	1
39	XBHZZ	80063	A3027902	PLATE, ELECTRICAL SH	1
40	XBHZZ	80063	A3026580	SUPPORT	6
41	PAHZZ	80063	A3027735	WASHER, INSULATING	9
42	XBHZZ	80063	A3027900	SHIELD, TERMINAL BOA	1
43	XBHZZ	80063	A3031038-201	LABEL	1
				END OF FIGURE	

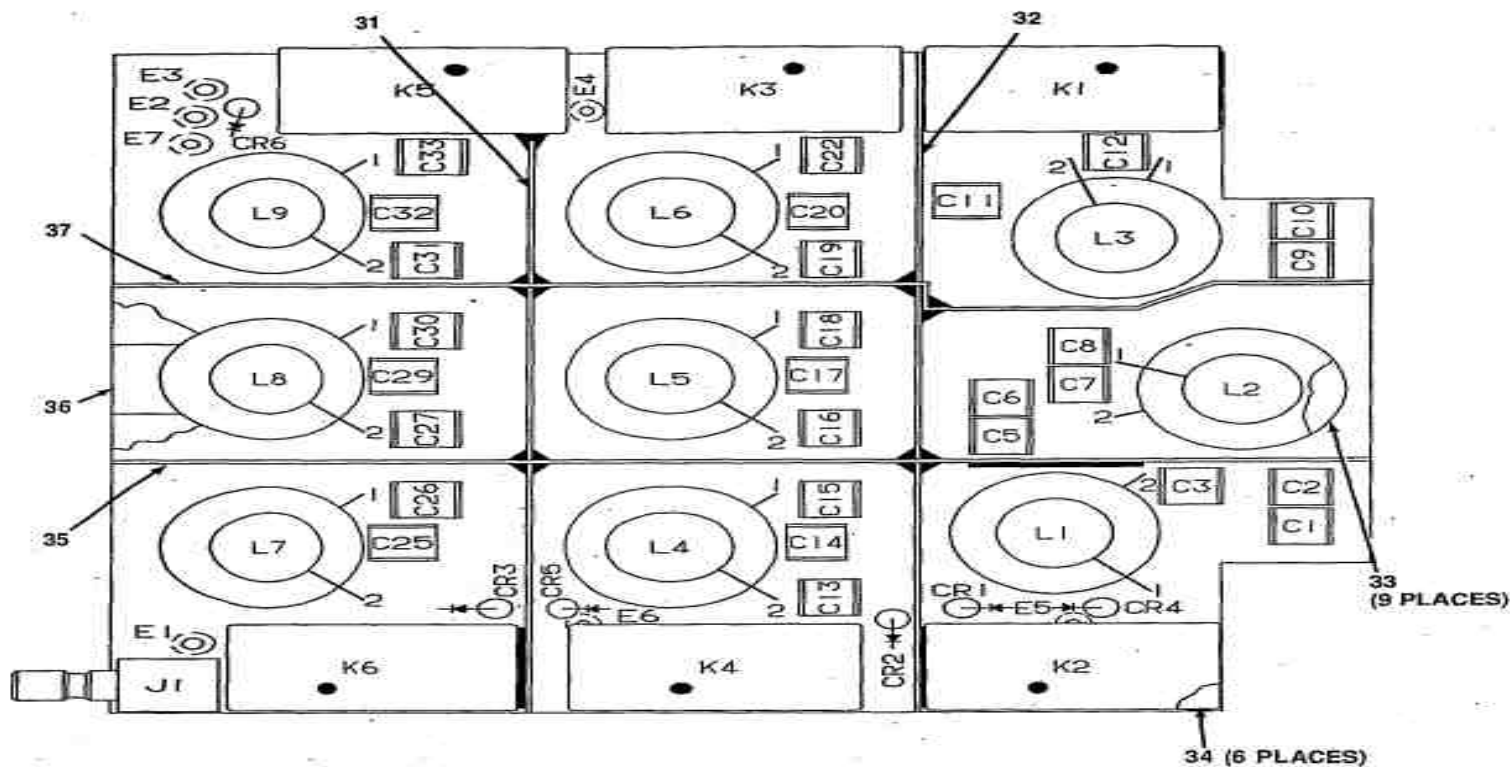

LEGEND


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C4	5	C13	11	C22	14	C32	21	L1	25
CR2	1	C5	6	C14	12	C23	15	C33	22	L2	25
CR3	1	C6	7	C15	2	C25	16	J1	23	L3	26
CR4	1	C7	4	C16	2	C26	3	K1	24	L4	27
CR5	1	C8	8	C17	5	C27	17	K2	24	L5	27
CR6	1	C9	9	C18	12	C28	18	K3	24	L6	28
C1	2	C10	9	C19	2	C29	19	K4	24	L7	29
C2	3	C11	9	C20	13	C30	10	K5	24	L8	29
C3	4	C12	10	C21	3	C31	20	K6	24	L9	30

CECNL-025

FIGURE 12 CCA (A3027656)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102020202 CCA (A3027656)	
				FIG.12	
1	PAHZZ	14099	1N6075	SEMICONDUCTOR DEVIC	6
2	PAHZZ	29990	ATC100B131FC300X	CAPACITOR, FIXED, CER	4
3	PAHZZ	29990	ATC100B820FC500X	CAPACITOR, FIXED, CER	3
4	PAHZZ	29990	ATC100B221FC200X	CAPACITOR, FIXED, CER	2
5	PAHZZ	29990	ATC100B201FC300X	CAPACITOR, FIXED, CER	2
6	PAHZZ	29990	ATC100B360FC200X	CAPACITOR, FIXED, CER	1
7	PAHZZ	29990	ATC100B331FC200X	CAPACITOR, FIXED, CER	1
8	PAHZZ	29990	ATC100B301FC200X	CAPACITOR, FIXED, CER	1

9	PAHZZ	29990	ATC100B391FC200X	CAPACITOR, FIXED, CER	3
10	PAHZZ	29990	ATC100B101FC500X	CAPACITOR, FIXED, GLA	2
11	PAHZZ	29990	ATC100B620FC500X	CAPACITOR, FIXED, GLA	1
12	PAHZZ	29990	ATC100B161FC300X	CAPACITOR, FIXED, CER	2
13	PAHZZ	29990	ATC100B390FC500X	CAPACITOR, FIXED, CER	1
14	PAHZZ	29990	ATC100B430FC500X	CAPACITOR, FIXED, CER	1
15	PAHZZ	29990	ATC100B150FC500X	CAPACITOR, FIXED, CER	1
16	PAHZZ	29990	ATC100B680FC500X	CAPACITOR, FIXED, CER	1
17	PAHZA	29990	ATC100B240FC500X	CAPACITOR, FIXED, GLA	1
18	PAHZZ	29990	ATC100B470FC500X	CAPACITOR, FIXED, CER	1
19	PAHZZ	29990	ATC100B360FC500X	CAPACITOR, FIXED, CER	1
20	PAHZZ	29990	ATC100B220FC500X	CAPACITOR, FIXED, CER	1
21	PAHZZ	29990	ATC100B160FC500X	CAPACITOR, FIXED, GLA	1
22	PAHZZ	29990	ATC100B270FC500X	CAPACITOR, FIXED, CER	1
23	PAHZZ	07187	4022893-001	CONNECTOR, RECEPTACL	1
24	PAHZZ	81349	M39016/13-057P	RELAY, ELECTROMAGNET	6
25	PAHZZ	80063	A3030132	INDUCTOR	2
26	PAHZZ	80063	A3030133	TRANSFORMER ASSEMBL	1
27	PAHZZ	80063	A3030124	TRANSFORMER	2
28	PAHZZ	80063	A3030130	TRANSFORMER	1
29	PAHZZ	80063	A3030121	TRANSFORMER	2
30	PAHZZ	80063	A3030123	TRANSFORMER	1
31	XBHZZ	80063	A3027902	PLATE, ELECTRICAL SH	1
32	XBHZZ	80063	A3027901	SHIELD	1
33	PAHZZ	80063	A3027735	WASHER, INSULATING	9
34	XBHZZ	80063	A3026580	SUPPORT	6
35	XBHZZ	80063	A3027900	SHIELD, TERMINAL BOA	1
36	XBHZZ	80063	A3031038-198	LABEL	1
37	XBHZZ	80063	A3027899	SHIELD, TERMINAL BOA	1
				END OF FIGURE	

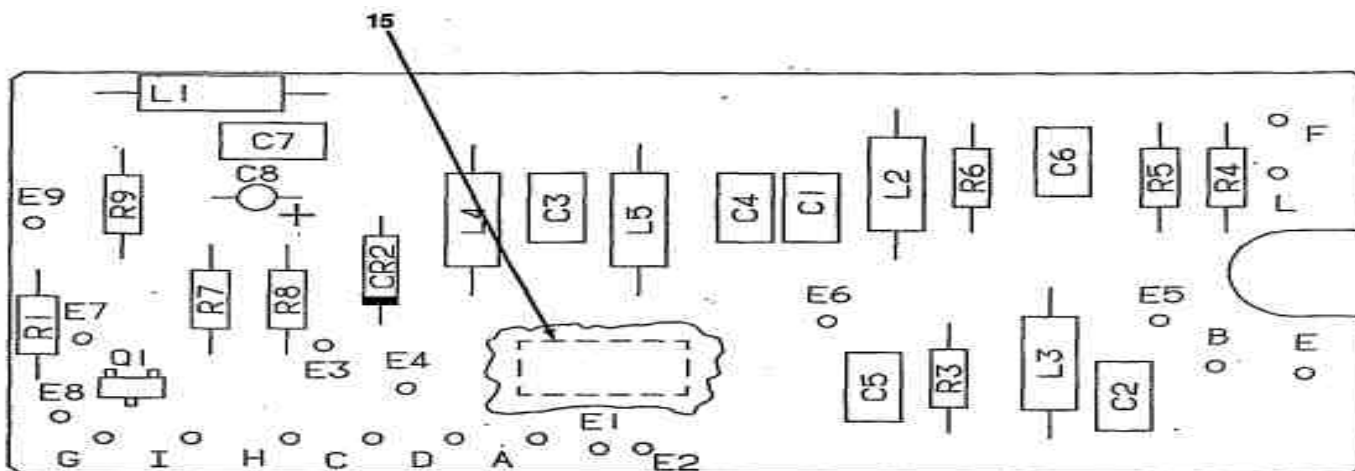

LEGEND


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR2	1	L4	6
C1	2	L5	6
C2	2	Q1	7
C3	2	R1	8
C4	2	R2	9
C5	2	R3	10
C6	2	R4	11
C7	3	R5	12
C8	4	R6	10
L1	5	R7	13
L2	6	R8	14
L3	6	R9	12

CEONL-026

FIGURE 13 CCA (A3027660)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102020203 CCA (A3027660)	
				FIG.13	
1	PAHZZ	81349	JANTX1N4454	SEMICONDUCTOR DEVIC	1
2	PAHZZ	81349	M39014/01-1575	CAPACITOR,FIXED,CER	6
3	PAHZZ	81349	M39014/01-1351	CAPACITOR,FIXED,CER	1
4	PAHZZ	31433	T370B475M004AS	CAPACITOR,FIXED,TAN	1
5	PAHZZ	96906	MS75085-19	COIL,RADIO FREQUENC	1
6	PAHZZ	96906	MS75085-11	COIL,RADIO FREQUENC	4
7	PAHZZ	04713	MMBF4860	TRANSISTOR	1
8	PAHZZ	81349	RCR05G882JS	RESISTOR,FIXED,COMP	1

9	PAHZZ	81349	RJR26FW103R	RESISTOR,VARIABLE,N	1
10	PAHZZ	81349	RCR05G332JS	RESISTOR,FIXED,COMP	2
11	PAHZZ	81349	RCR05G912JS	RESISTOR,FIXED,COMP	1
12	PAHZZ	81349	RCR05G102JS	RESISTOR,FIXED,COMP	2
13	PAHZZ	81349	RCR05G513JS	RESISTOR,FIXED,COMP	1
14	PAHZZ	81349	RCR05G205JS	RESISTOR,FIXED,COMP	1
15	XBHZZ	80063	A3031038-199	LABEL	1
END OF FIGURE					

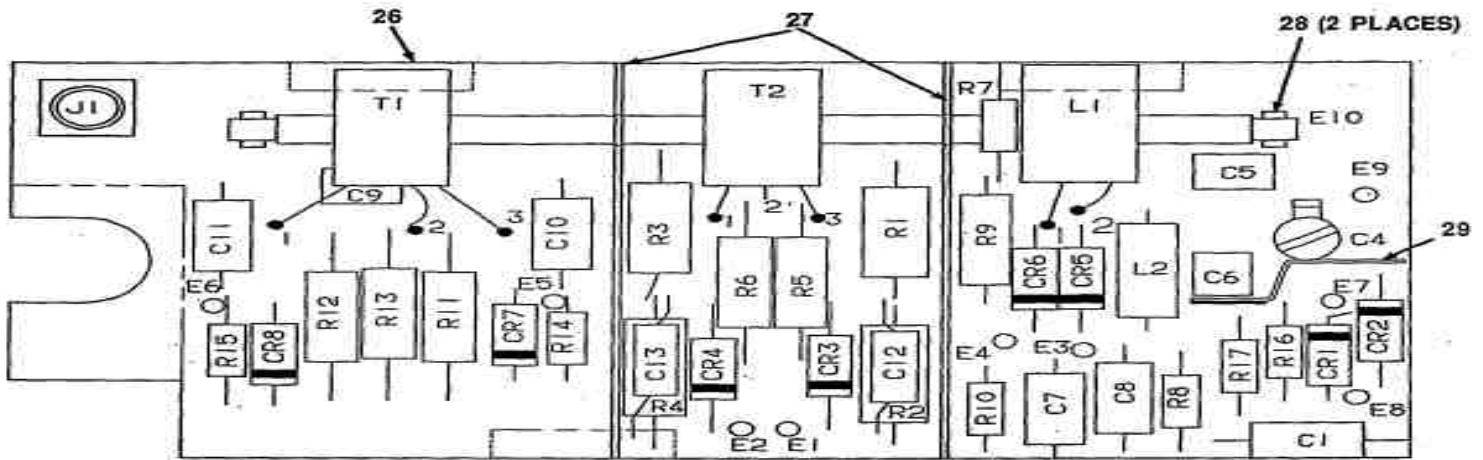

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	L2	14
CR2	1	R1	15
CR3	2	R2	16
CR4	2	R3	15
CR5	3	R4	16
CR6	3	R5	17
CR7	3	R6	17
CR8	3	R7	18
C1	4	R8	19
C4	5	R9	20
C5	6	R10	19
C6	7	R11	20
C7	8	R12	20
C8	8	R13	21
C9	9	R14	22
C10	8	R15	22
C11	8	R16	23
C12	10	R17	24
C13	11	T1	25
J1	12	T2	25
L1	13		




GEONL-027




FIGURE 14 CCA (A3027659)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102020204 CCA CA3027659)	


[FIG.14](#)

				FIG.14	
1	PAHZZ	54893	HP5082-2912	SEMICONDUCTOR DEVIC	1
2	PAHZZ	28480	1N5711	SEMICONDUCTOR DEVIC	2
3	PAHZZ	81349	JAN1N5711	SEMICONDUCTOR DEVIC	4
4	PAHZZ	81349	M39014/01-1593	CAPACITOR,FIXED,CER	1
5	PAHZZ	80063	A3030744-1	CAPACITOR,VARIABLE,	1
6	PAHZZ	29990	ATC100A2R7B500X	CAPACITOR,FIXED,POR	1
7	PAHZZ	29990	ATC100B471KC200X	CAPACITOR,FIXED,CER	1
8	PAHZZ	81349	M39014/01-1575	CAPACITOR,FIXED,CER	4
9	PAHZZ	29990	ATC100A120JC100X	CAPACITOR,FIXED,CER	1
10	PAHZZ	61306	DM5CC120D0	CAPACITOR,FIXED,MIC	1
11	PAHZZ	61306	DM5CC030D0	CAPACITOR,FIXED,MIC	1
12	PAHZZ	98291	51-451-0000	CONNECTOR,RECEPTACL	1
13	PAHZZ	80063	A3030115	TRANSFORMER ASSEMBL	1
14	PAHZZ	96906	MS75083-7	COIL,RADIO FREQUENC	1
15	PAHZZ	81349	RNC55K9091FS	RESISTOR,FIXED,FILM	2
16	PAHZZ	81349	RNC55K1910FS	RESISTOR,FIXED,FILM	2
17	PAHZZ	81349	RCR07G220JS	RESISTOR,FIXED,COMP	2
18	PAHZZ	81349	RCR05G242JS	RESISTOR,FIXED,COMP	1
19	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	2
20	PAHZZ	81349	RCR07G200JS	RESISTOR,FIXED,COMP	3
21	PAHZZ	81349	RCR07G750JS	RESISTOR,FIXED,COMP	1
22	PAHZZ	81349	RCR05G132JS	RESISTOR,FIXED,COMP	2
23	PAHZZ	81349	RCR05G512JS	RESISTOR,FIXED,COMP	1
24	PAHZZ	81349	RCR05G301JS	RESISTOR,FIXED,COMP	1
25	PAHZZ	80063	A3030092	TRANSFORMER	2
26	XBHZZ	80063	A3031038-200	LABEL	1
27	PAHZZ	80063	A3030741	SHIELD,COUPLER,DIRE	2
28	PAHZZ	91662	02-015-323-6100	CONNECTOR,RECEPTACL	2
29	PAHZZ	80063	A3026941-1	BUS,CONDUCTOR	1
				END OF FIGURE	

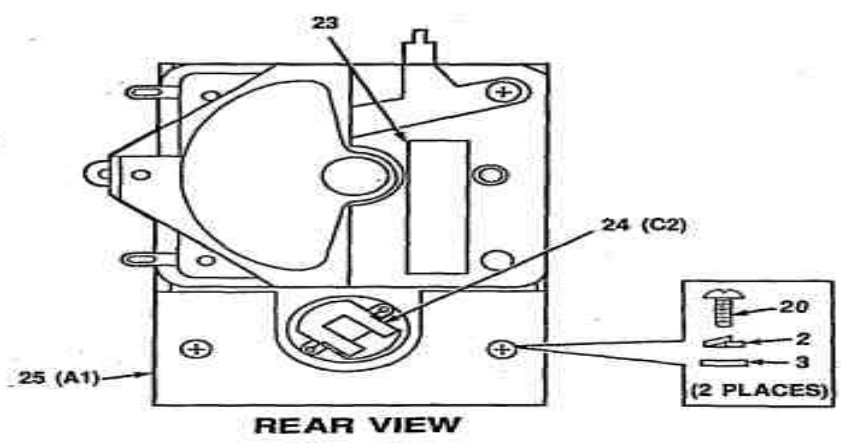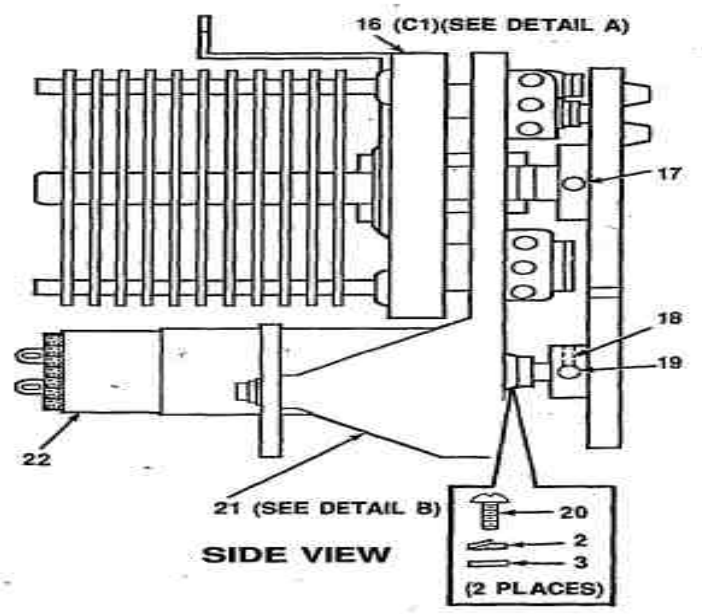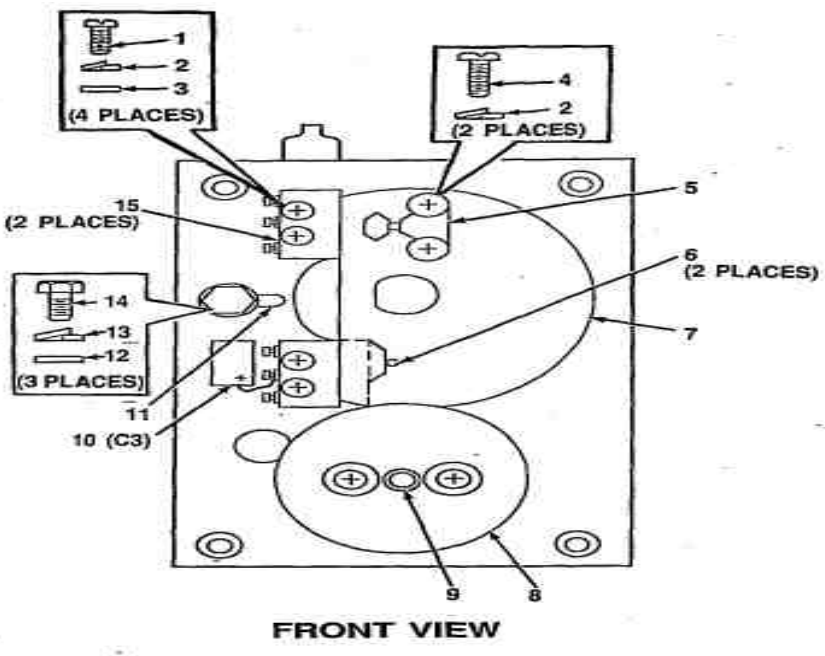





**REAR VIEW
DETAIL A**

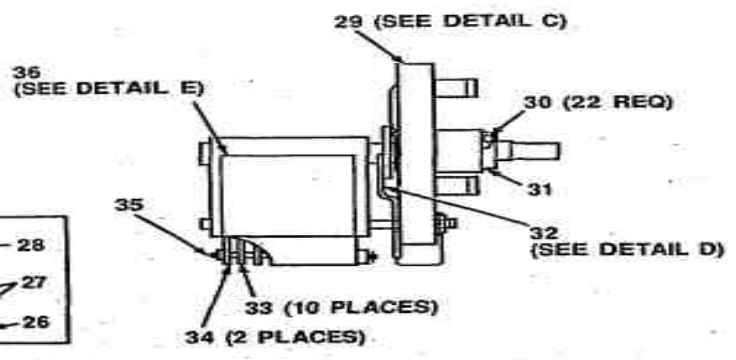


**SIDE VIEW
DETAIL A**

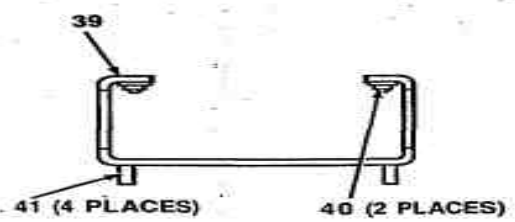

DETAIL B

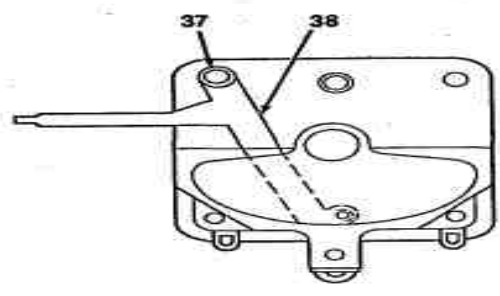

**FRONT VIEW
DETAIL A**

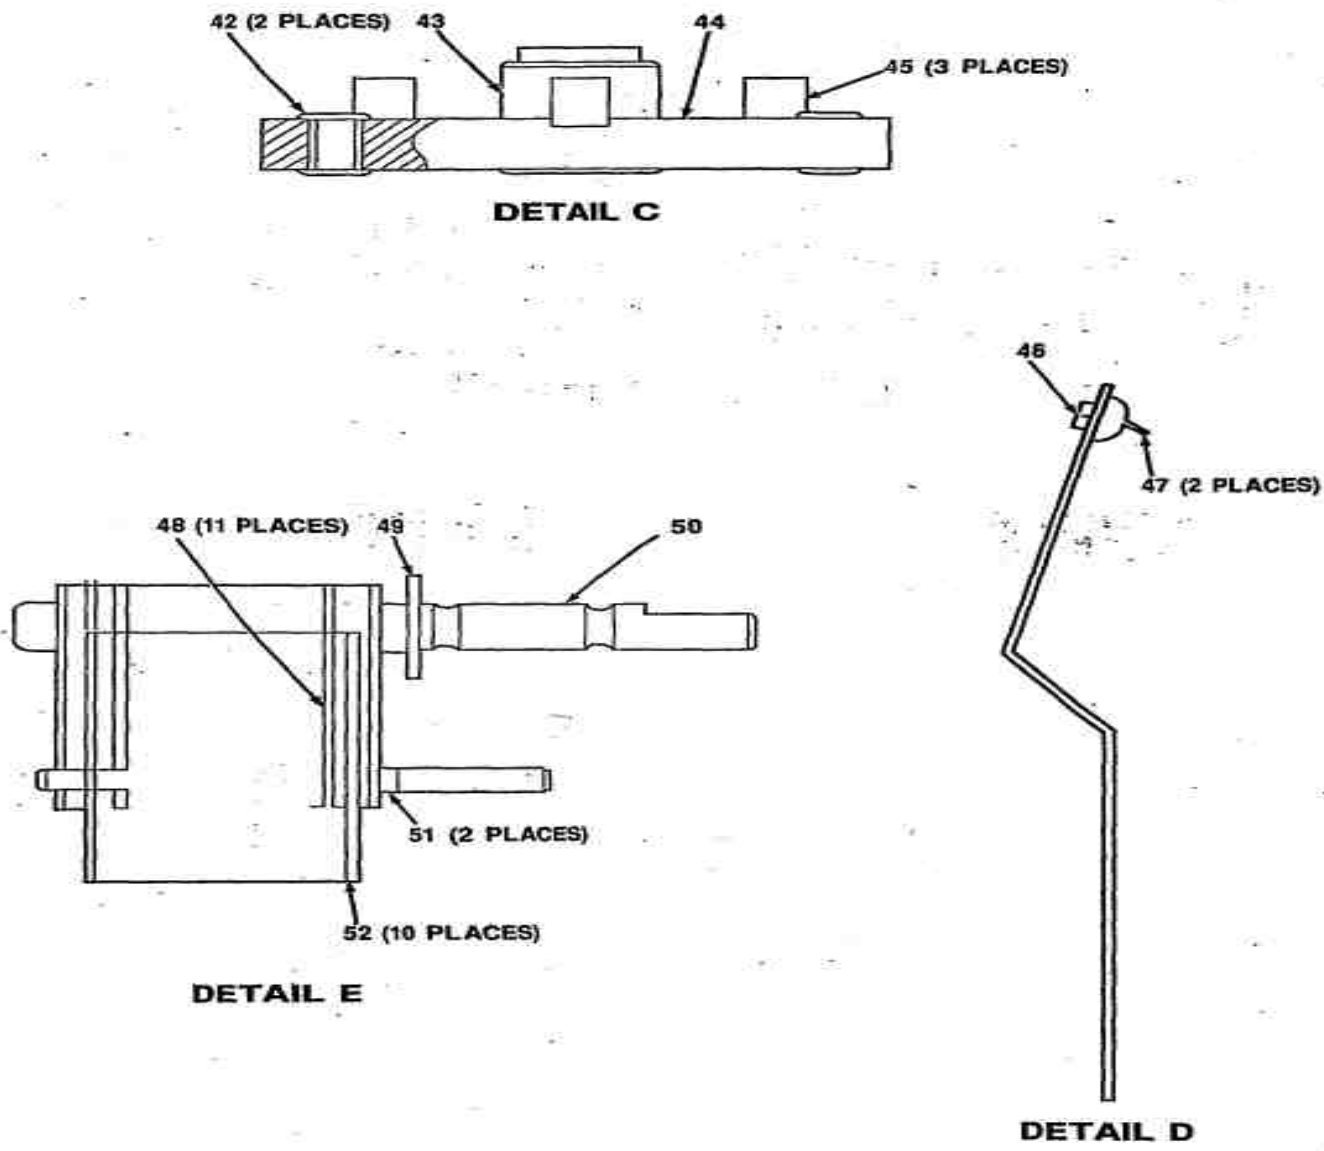


CEONL-030

FIGURE 15 Variable Condenser Assy A1A2A20C1 (A3027653)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020203 VARIABLE CONDENSER ASSEMBLY A1A2A20C1 (A3027653)	
				FIG.15	
1	PAHZZ	96906	MS51957-5	SCREW,MACHINE	4
2	XBHZZ	A3026	3-10311-002	WASHER,LOCK	10
3	XBHZZ	A3026	3-10285.005//C	WASHER,FLAT	8
4	PAHZZ	96906	MS51957-1	SCREW,MACHINE	2
5	PAHZZ	80063	A3027805	ARM,ROCKER	1
6	XBHZZ	80063	A3027765	PLATE	2
7	PAHZZ	80063	A3027948	GEAR ASSEMBLY	1

8	PAHZZ	80063	A3027755	GEAR-STRAIGHT TOOTH	1
9	XBHZZ	80063	A3026869-8	PIN,ROLL	1
10	PAHZZ	80063	CLR65BB560KGL	CAPACITOR 56UF	1
11	PAHZZ	80063	A3026908-4	TERMINAL,LUG	1
12	XBHZZ	A3026	3-10285.008//C	WASHER,FLAT	3
13	XBHZZ	A3026	3-10311-004	WASHER,LOCK	3
14	XBHZZ	80063	A3027004-1	SCREW	3
15	PAHZZ	96906	MS24547-1	SWITCH,SENSITIVE	2
16	XBHLL	80063	A3027689	VARIABLE CAPACITOR	1
17	PAHZZ	80063	A3027006-2	SETSCREW	1
18	XBHZZ	80063	A3026869-2	PIN,SPRING	1
19	PAHZZ	80063	A3027006-1	SETSCREW	1
20	PAHZZ	96906	MS51957-3	SCREW,MACHINE	4
21	XBHLL	80063	A3027947	SUPPORT ASSEMBLY,BR	1
22	PAHZZ	80063	A3030170	GEAR MOTOR	1
23	XBHZZ	80063	A3031038-189	LABEL	1
24	PAHZZ	81349	M39014/01-1357	CAPACITOR,FIXED,CER	1
25	PAHLL	80063	A3027661	CIRCUIT CARD ASSEMB (SEE FIG.16 FOR BREAKDOWN)	1
26	XBHZZ	80063	A3027542-2	NUT,HEXAGON-- METRIC	5
27	XBHZZ	80063	A3026860-2	WASHER,FLAT	5
28	XBHZZ	80063	A3027003-3	SCREW	1
29	XBHLL	80063	A3027967	PLATE ASSEMBLY,SUPP	1
30	PAHZZ	80063	A3027726	SPHERE,STEEL	22
31	XBHZZ	80063	A3027716	NUT,ADJUSTMENT	1
32	XBHLL	80063	A3027969	CONTACT,ELECTRICAL	1
33	PAHZZ	80063	A3027922	BLADE,DIELECTRIC	10
34	PAHZZ	80063	A3027796	BUSHING	2
35	XBHZZ	80063	A3027801	SHAFT,CENTRAL,STATO	1
36	XBHLL	80063	A3027968	ROTOR,STATOR ASSEMB	1
37	PAHZZ	A2728	OU-40.80	EYELET	1
38	XBHZZ	80063	A3027917	STRAP,RETAINING	1
39	PAHZZ	80063	A3027839	COVER	1
40	PAHZZ	72962	79NCFM1-26	NUT,SELF-LOCKING,CL	2
41	PAHZZ	81349	M63540/1-6C	STUD,SELF-LOCKING	4
42	PAHZZ	A2728	OU-40.80	EYELET	2
43	XBHZZ	80063	A3027776	SHAFT,SHOULDERED	1
44	XBHZZ	80063	A3027927	SUPPORT;	1

45	XBHZZ	80063	A3027718	INSERT,SCREW THREAD	3
46	XBHZZ	80063	A3027719	BRACKET	1
47	PAHZZ	80063	A3027816	CONTACT	2
48	PAHZZ	80063	A3027923	PLATE	11
49	PAHZZ	80063	A3027717	CONTACT,ELECTRICAL	1
50	PAHZZ	80063	A3027882	SHAFT	1
51	PAHZZ	80063	A3027883	SUPPORT	2
52	PAHZZ	80063	A3027924	PLATE -STATOR FIXED	10
				END OF FIGURE	

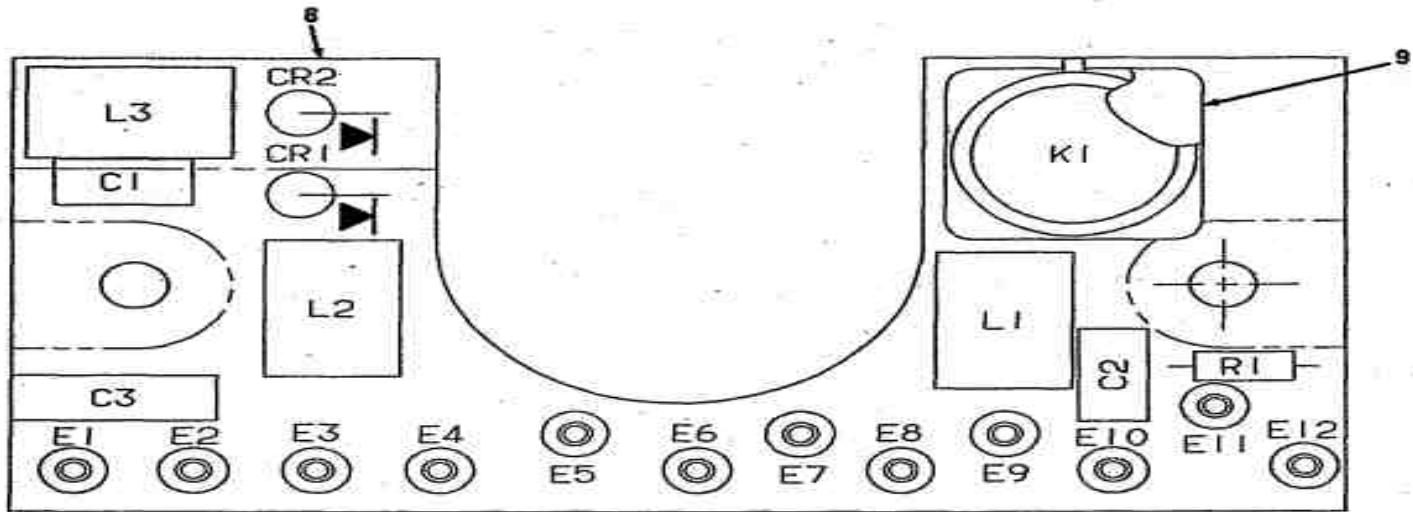

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	E7	4
CR2	1	E8	4
C1	2	E9	4
C2	2	E10	4
C3	3	E11	4
E1	4	E12	4
E2	4	K1	5
E3	4	L1	6
E4	4	L2	6
E5	4	L3	6
E6	4	R1	7


GEONL-031


FIGURE 16 CCA (A3027661)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY

[FIG.16](#)

1	PAHZZ	81349	JAN1N3611	SEMICONDUCTOR DEVIC	2
2	PAHZZ	81349	M39014/01-1593	CAPACITOR, FIXED, CER	2
3	PAHZZ	81349	M39014/02-1360	CAPACITOR, FIXED, CER	1
4	PAHZZ	71279	1602040020500	TERMINAL,TURRET	12
5	XBHZZ	81349	M39016/26-020P	RELAY, ELECTROMAGNET	1
6	PAHZZ	80063	A3030114	TRANSFORMER	3
7	PAHZZ	81349	RCR05G102JS	RESISTOR, FIXED, COMP	1
8	XBHZZ	80063	A3031038-202	LABEL	1
9	PAHZZ	80063	A3030593	PAD	1
END OF FIGURE					

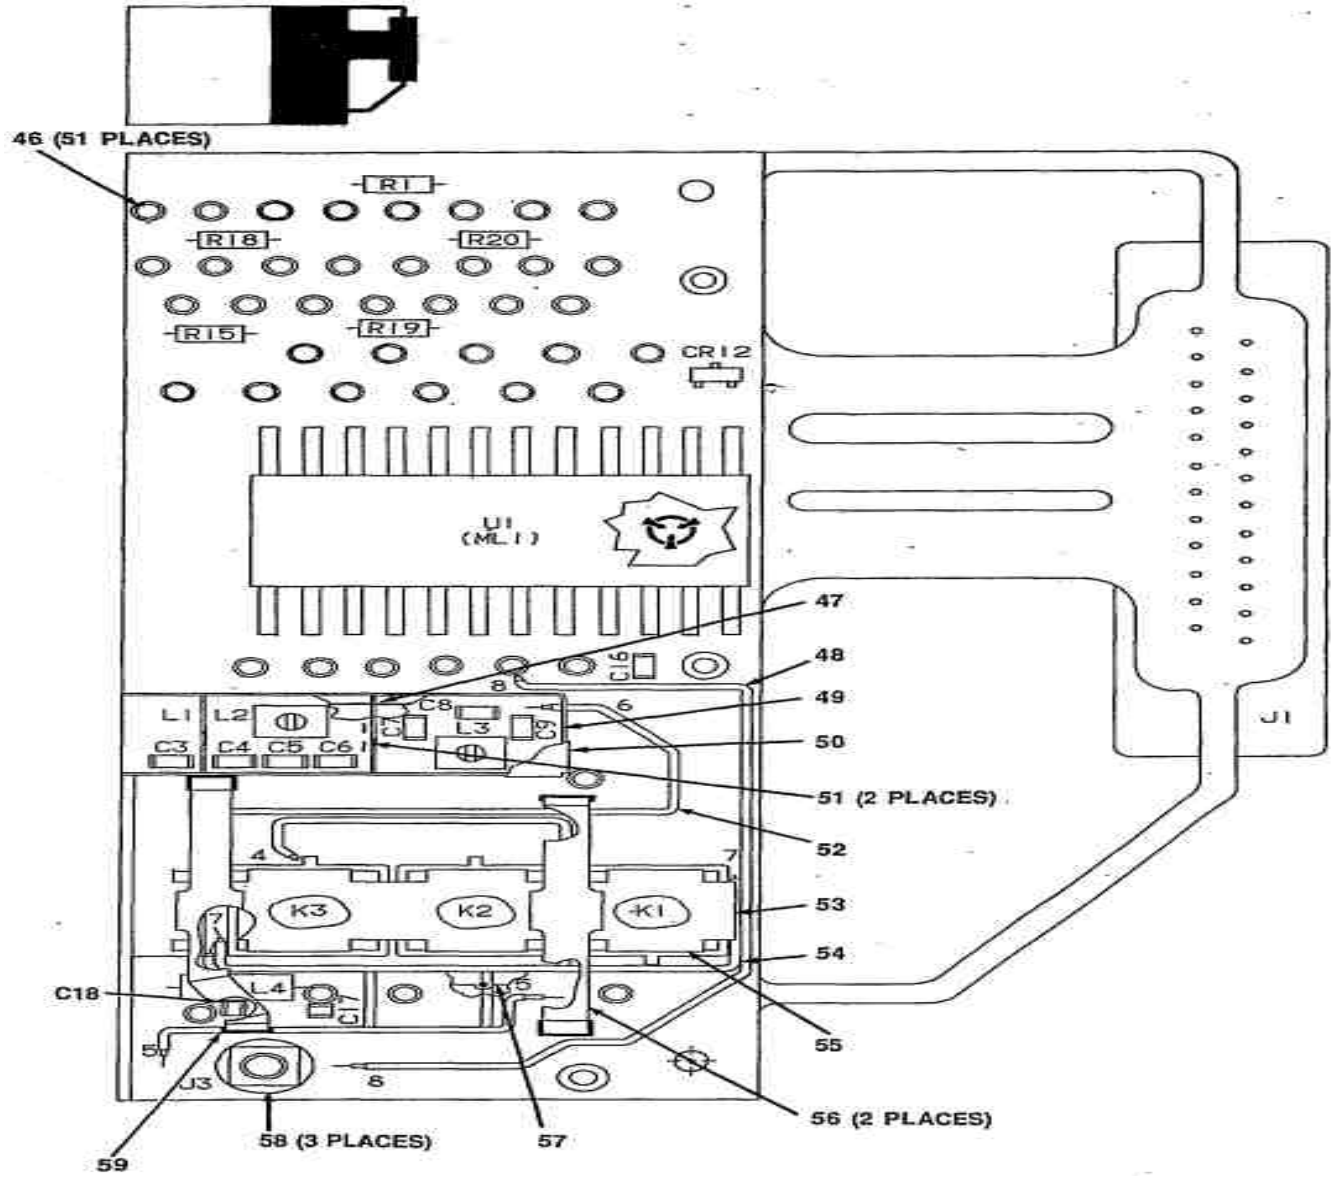

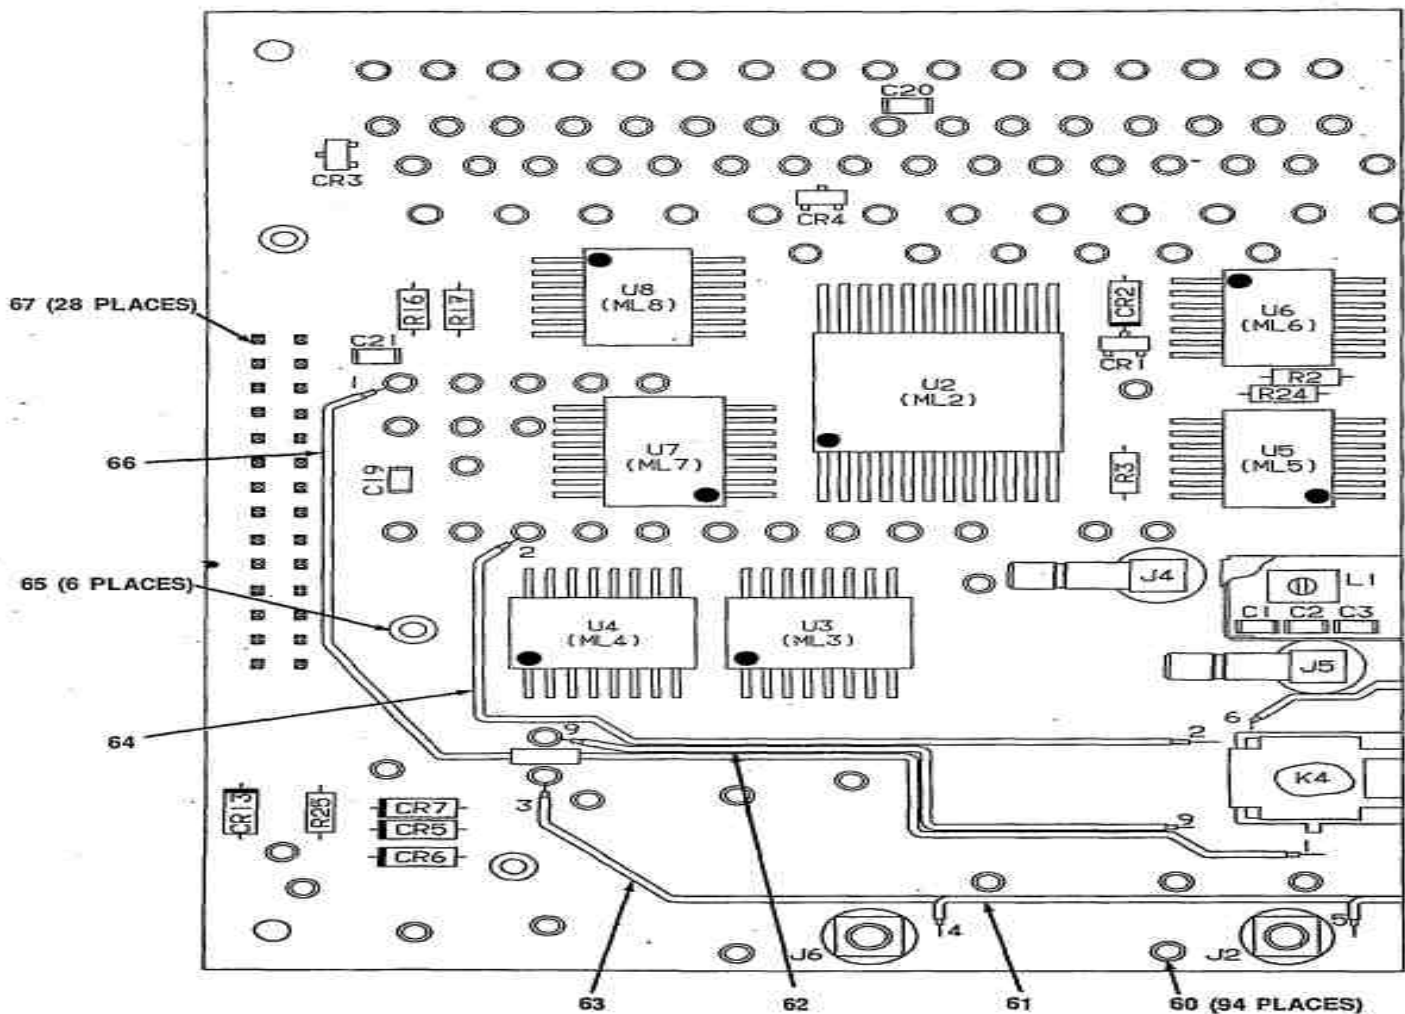

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C3	7	C18	14	L2	22	R6	30	R21	35
CR2	2	C4	7	C19	13	L3	23	R7	31	R22	36
CR3	1	C5	8	C20	15	L4	24	R8	32	R23	36
CR4	3	C6	9	C21	16	Q1	25	R9	32	R24	37
CR5	2	C7	10	J1	17	Q2	25	R10	32	R25	38
CR6	2	C8	11	J2	18	Q3	25	R11	33	U1	39
CR7	4	C9	10	J3	18	Q4	26	R12	33	U2	40
CR8	2	C10	12	J4	19	Q5	26	R13	33	U3	41
CR9	2	C11	12	J5	19	Q6	26	R14	33	U4	41
CR10	2	C12	12	J6	18	Q7	26	R15	28	U5	42
CR11	2	C13	12	K1	20	R1	27	R16	32	U6	43
CR12	3	C14	13	K2	20	R2	28	R17	32	U7	44
CR13	2	C15	13	K3	20	R3	28	R18	28	U8	45
C1	5	C16	13	K4	20	R4	29	R19	28		
C2	6	C17	14	L1	21	R5	29	R20	34		


GEONL-034

FIGURE 17 Grandmother Board CCA A1A2A20A12 (A3027352)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020204 GRANDMOTHER BOARD CCA A1A2A20A12 (A3027352)	
				FIG.17	
1	PAHZZ	04713	BAV70	SEMICONDUCTOR DEVIC	2
2	PAHZZ	81349	JAN1N4454-1	SEMICONDUCTOR DEVIC	8
3	PAHZZ	04713	BAW56	SEMICONDUCTOR DEVIC	2
4	PAHZZ	81349	JANTX1N5711	SEMICONDUCTOR DEVIC	1
5	PAHZZ	16546	C390J1005CFPB	CAPACITOR, FIXED, CER	1
6	PAHZZ	16546	C220J1005CFPB	CAPACITOR, FIXED, CER	1
7	PAHZZ	16546	C560J1005CFPB	CAPACITOR, FIXED, CER	2

8	PAHZZ	16546	C829J1005CFPB	CAPACITOR, FIXED, CER	1
9	PAHZZ	29990	ATC100A470JC50X	CAPACITOR, FIXED, CER	1
10	PAHZZ	16546	C152K1005XFPB	CAPACITOR, FIXED, CER	2
11	PAHZZ	16546	C680J1005CFPB	CAPACITOR, FIXED, CER	1
12	PAHZZ	16546	C103K1005XHPB	CAPACITOR, FIXED, CER	4
13	PAHZZ	80063	A3031507	CAPACITOR, FIXED, CER	4
14	PAHZZ	29990	ATC700A121JC50X	CAPACITOR, FIXED, CER	2
15	PAHZZ	80063	A3031556	CAPACITOR, FIXED, CER	1
16	PAHZZ	16546	C102K1005XFPB	CAPACITOR, FIXED, CER	1
17	PAHZZ	71468	DBMY25SOL3	CONNECTOR, RECEPTACL	1
18	PAHZZ	98291	51-451-0000	CONNECTOR, RECEPTACL	3
19	PAHZZ	07187	4022893-001	CONNECTOR, RECEPTACL	2
20	PAHZZ	81349	M39016/19-042L	RELAY, ELECTROMAGNET	4
21	PAHZZ	81349	M83446/9-13	COIL, RADIO, FREQ	1
22	PAHZZ	81349	M83446/9-15	COIL, RADIO, FREQ	1
23	PAHZZ	81349	M83446/9-28	COIL, RADIO, FREQ	1
24	PAHZZ	96906	MS75083-6	COIL, RADIO FREQUENC	1
25	PAHZZ	04713	MMT3904	TRANSISTOR	3
26	PAHZZ	04713	MMBF4860	TRANSISTOR	4
27	PAHZZ	81349	RCR05G120JS	RESISTOR, FIXED, COMP	1
28	PAHZZ	81349	RCR05G104JS	RESISTOR, FIXED, COMP	5
29	PAHZZ	81349	RCR05G123JS	RESISTOR, FIXED, COMP	2
30	PAHZZ	81349	RCR05G822JS	RESISTOR, FIXED, COMP	1
31	PAHZZ	81349	RCR05G513JS	RESISTOR, FIXED, COMP	1
32	PAHZZ	81349	RCR05G103JS	RESISTOR, FIXED, COMP	5
33	PAHZZ	81349	RCR05G205JS	RESISTOR, FIXED, COMP	4
34	PAHZZ	81349	RCR05G512JS	RESISTOR, FIXED, COMP	1
35	PAHZZ	81349	RCR05G121JS	RESISTOR, FIXED, COMP	1
36	PAHZZ	81349	RCR05G750JS	RESISTOR, FIXED, COMP	2
37	PAHZZ	81349	RCR05G102JS	RESISTOR, FIXED, COMP	1
38	PAHZZ	81349	RCR05G511JS	RESISTOR, FIXED, COMP	1
39	PAHZZ	80063	A3030224-101	MICROCIRCUIT, DIGITA	1
40	PAHZZ	80063	A3030873	MICROCIRCUIT, DIGITA'	1
41	XBHZZ	14933	7705801FX	MICROCIRCUIT, DIGITA	2
42	PAHZZ	81349	M38510/05655BYX	MICROCIRCUIT, DIGITA	1
43	PAHZZ	81349	M38510/05052BYX	MICROCIRCUIT, DIGITA	1
44	PAHZZ	81349	M38510/05553BZX	MICROCIRCUIT, DIGITA	1
45	PAHZZ	81349	M38510/05051BYX	MICROCIRCUIT, DIGITA	1

46	PAHZZ	81349	M55155/30-5Z	TERMINAL	51
47	XBHZZ	80063	A3031038-20	LABEL	1
48	XBHZZ	80063	A3031464-8	CABLE	1
49	XBHZZ	80063	A3027702	FRAME,ACCESS	1
50	XBHZZ	80063	A3027700	COVER,TERMINAL BOAR	1
51	XBHZZ	80063	A3027701	SHIELD,TERMINAL BOA	2
52	XBHZZ	80063	A3031464-6	CABLE	1
53	XBHLL	80063	A3027972	FINGER BRACKET ASSE	1
54	XBHZZ	80063	A3031464-7	CABLE	1
55	XBHZZ	80063	A3027870	CLIP,ELECTRICAL	1
56	XBHZZ	80063	A3027720	BUS BAR	2
57	XBHZZ	80063	A3030895	CONTACT FINGERS	1
58	PAHZZ	80063	A3030885	SHIM	3
59	XBHZZ	80063	A3031464-5	CABLE	1
60	PAHZZ	06776	0001029	JACK,TIP	94
61	XBHZZ	80063	A3031464-4	CABLE	1
62	XBHZZ	80063	A3031464-9	CABLE	1
63	XBHZZ	80063	A3031464-3	CABLE	1
64	XBHZZ	80063	A3031464-2	CABLE	1
65	PAHZZ	80063	A3027743	CONTACT,ELECTRICAL	6
66	XBHZZ	80063	A3031464-1	CABLE	1
67	PAHZZ	00779	85931-5	CONTACT,ELECTRICAL	28
				END OF FIGURE	

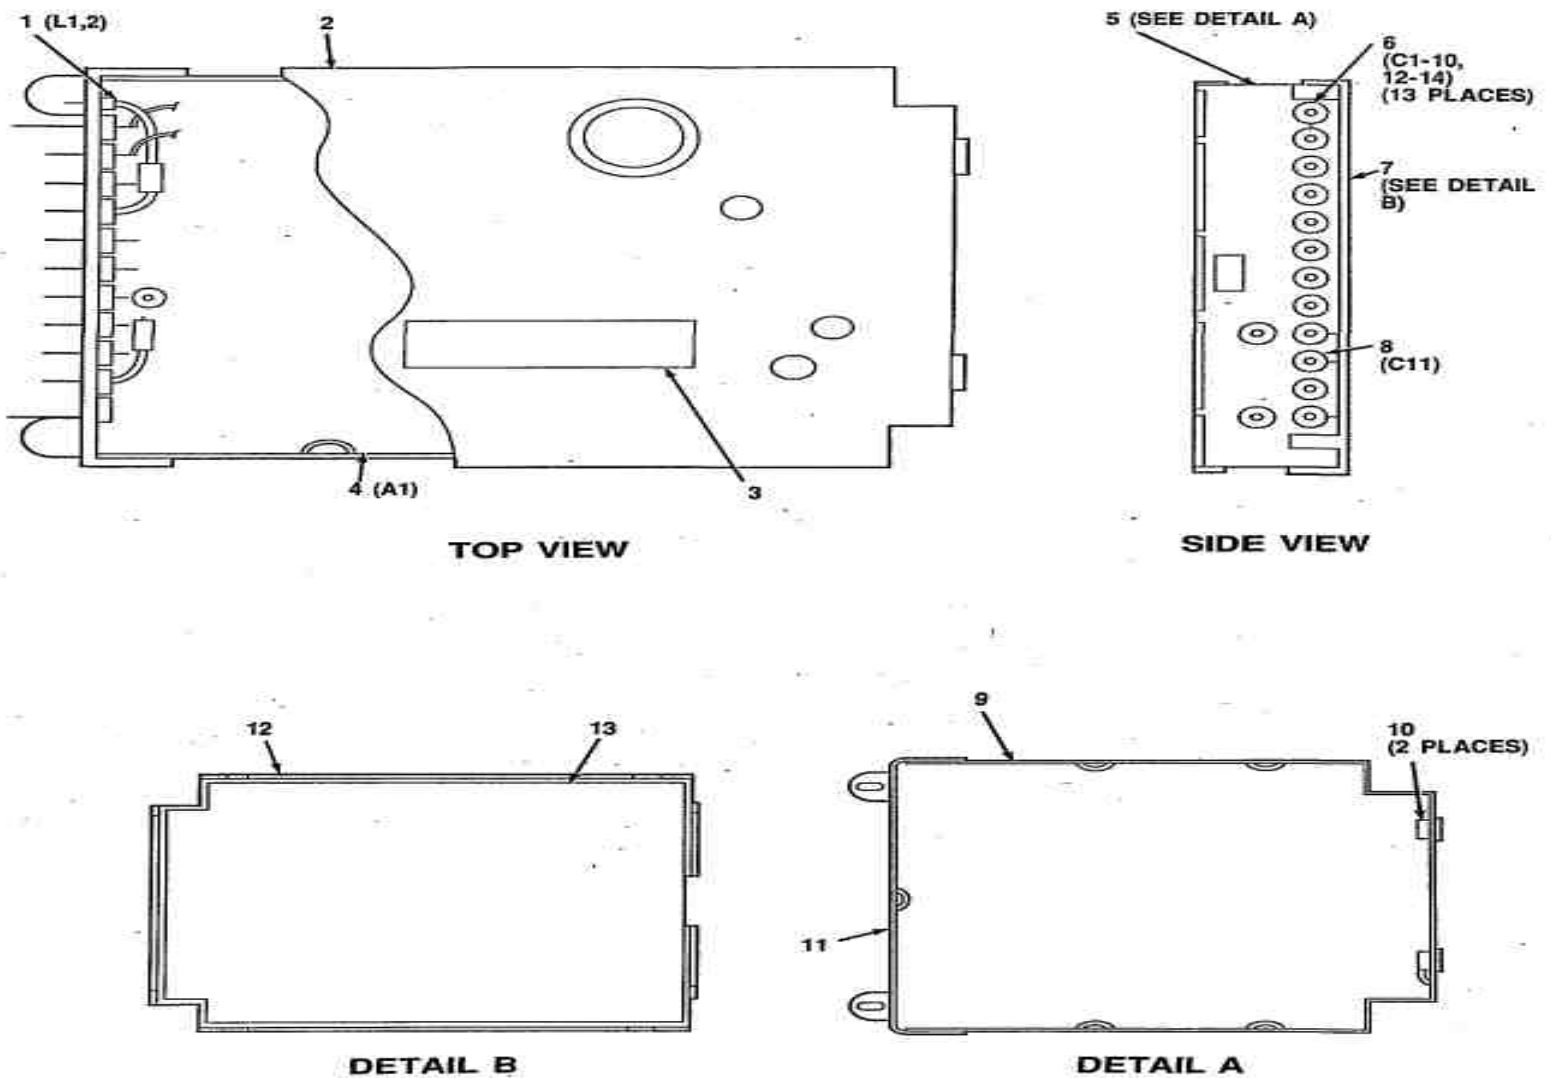


CEONL-035

FIGURE 18 Power Supply Assy (A3027672)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020205 POWER SUPPLY ASSEMBLY (A3027672)	
				FIG.18	
1	PAHZZ	96906	MS75085-7	COIL,RADIO FREQUENC	2
2	XBHZZ	80063	A3031356	COVER ASSEMBLY	1
3	XBHZZ	80063	A3031038-195	LABEL	1
4	PAHLL	80063	A3027654	CIRCUIT CARD ASSEMB (SEE FIG. 19 FOR BREAKDOWN)	1
5	XBHLL	80063	A3027950	POWER SUPPLY ASSEMB	1
6	PAHZZ	12294	9900-001-6004	FILTER,RADIO FREQUE	13

7	XBHLL	80063	A3027973	COVER,LOWER ASSEMBL	1
8	PAHZZ	80063	A3030230-3	FILTER,EMI,FEED THR	1
9	XBHZZ	80063	A3027890	BRACKET,ELECTRICAL	1
10	XBHZZ	80063	A3027792	BUSHING,THREADED	2
11	XBHZZ	80063	A3027891	BAND,RETAINING	1
12	XBHZZ	80063	A3027887	COVER,LOWER- POWER	1
13	XBHZZ	80063	A3027897	COVER,INSULATION PR	1
				END OF FIGURE	

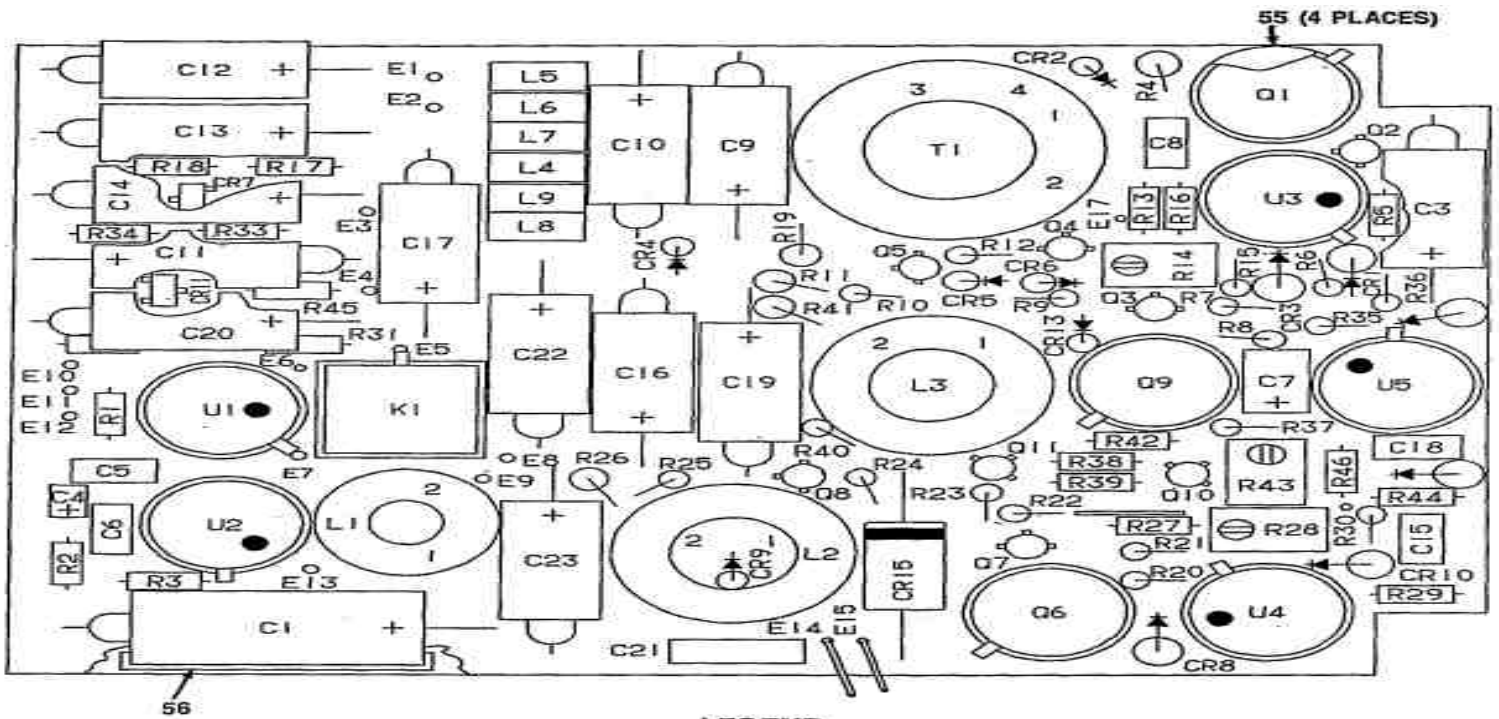

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C6	10	K1	18	Q10	26	R18	30	R37	35
CR2	2	C7	11	L1	19	Q11	27	R19	43	R38	34
CR3	1	C8	12	L2	20	R1	29	R20	33	R39	34
CR4	2	C9	13	L3	20	R2	30	R21	34	R40	44
CR5	3	C10	13	L4	21	R3	31	R22	35	R41	45
CR6	3	C11	13	L5	22	R4	32	R23	34	R42	34
CR7	4	C12	13	L6	22	R5	33	R24	34	R43	47
CR8	1	C13	13	L7	23	R6	34	R25	44	R44	50
CR9	2	C14	13	L8	24	R7	35	R26	45	R45	30
CR10	1	C15	12	L9	24	R8	34	R27	46	R46	41
CR11	4	C16	14	Q1	25	R9	34	R28	47	T1	51
CR12	1	C17	14	Q2	26	R10	36	R29	40	U1	52
CR13	2	C18	12	Q3	26	R11	37	R30	41	U2	53
CR14	1	C19	15	Q4	27	R12	36	R31	48	U3	54
CR15	5	C20	15	Q5	27	R13	38	R32	30	U4	54
C1	6	C21	16	Q6	28	R14	39	R33	49	U5	54
C3	7	C22	14	Q7	26	R15	40	R34	30		
C4	8	C23	14	Q8	27	R16	41	R35	33		
C5	9	C24	17	Q9	28	R17	42	R36	34		

GEONL-036


FIGURE 19 Power Supply CCA (A3027654)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102020501 POWER SUPPLY CCA (A3027654)	

[FIG.19](#)

				FIG.19	
1	PAHZZ	81349	JANTX1N4461	SEMICONDUCTOR DEVIC	6
2	PAHZZ	14099	1N6075	SEMICONDUCTOR DEVIC E,DIODE	4
3	PAHZZ	81349	JANTX1N4454	SEMICONDUCTOR DEVIC	2
4	PAHZZ	04713	BAW56	SEMICONDUCTOR DEVIC	2
5	PAHZZ	24444	P6KE39	SEMICONDUCTOR,DEVIC	1
6	PAHZZ	81349	M39006/22-0571	CAPACITOR,FIXED,ELE	1
7	PAHZZ	80063	CLR65BH100KGL	CAPACITOR 10UF	1
8	PAHZZ	17554	MMF-020-105R-10	CAPACITOR,FIXED,ELE	1
9	PAHZZ	81349	M39014/01-1575	CAPACITOR,FIXED,CER	1
10	PAHZZ	81349	M39014/01-1357	CAPACITOR,FIXED,CER	1
11	PAHZZ	88818	C605006182	CAPACITOR,FIXED,ELE	1
12	PAHZZ	81349	M39014/01-1593	CAPACITOR,FIXED,CER	3
13	PAHZZ	81349	CLR65BD330KGL	CAPACITORS,FIXED	6
14	PAHZZ	80063	CLR65BC470KGL	CAPACITOR 47UF	4
15	PAHZZ	80063	CLR65BB560KGL	CAPACITOR 56UF	2
16	PAHZZ	81349	M39014/02-1360	CAPACITOR,FIXED,CER	1
17	XBHZZ	80063	A3031038-196	LABEL	1
18	PAHZZ	81349	M39016/19-042L	RELAY,ELECTROMAGNET	1
19	PAHZZ	80063	A3030126	TRANSFORMER ASSEMBL	1
20	PAHZZ	80063	A3030125	TRANSFORMER ASSEMBL Y	2
21	PAHZZ	96906	MS21422-22	COIL,RADIO FREQUENC	1
22	PAHZZ	96906	MS21422-18	COIL,RADIO FREQUENC	2
23	PAHZZ	96906	MS21422-16	COIL,RADIO FREQUENC	1
24	PAHZZ	96906	MS21422-21	COIL,RADIO FREQUENC	2
25	PAHZZ	81349	JAN2N3507	TRANSISTOR	1
26	PAHZZ	05869	750511-1	TRANSISTOR	4
27	PAHZZ	04713	MMT3904	TRANSISTOR	4
28	PAHZZ	81349	JANTX2N2905AL	TRANSISTOR	2
29	PAHZZ	81349	RCR05G243JS	RESISTOR,FIXED,COMP	1
30	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	5
31	PAHZZ	81349	RCR05G102JS	RESISTOR,FIXED,COMP	1
32	PAHZZ	81349	RCR07G680JS	RESISTOR,FIXED,COMP	1
33	PAHZZ	81349	RCR05G220JS	RESISTOR,FIXED,COMP	3
34	PAHZZ	81349	RCR05G512JS	RESISTOR,FIXED,COMP	10
35	PAHZZ	81349	RCR05G511JS	RESISTOR,FIXED,COMP	3
36	PAHZZ	81349	RCR05G242JS	RESISTOR,FIXED,COMP	2

37	PAHZZ	81349	RWR81S6R81FS	RESISTOR,FIXED,WIRE	1
38	PAHZZ	81349	RCR05G153JS	RESISTOR,FIXED,COMP	1
39	PAHZZ	81349	RJR26FW102R	RESISTOR,VARIABLE,N	1
40	PAHZZ	81349	RCR05G222JS	RESISTOR,FIXED,COMP	2
41	PAHZZ	81349	RCR05G202JS	RESISTOR,FIXED,COMP	3
42	PAHZZ	81349	RCR05G133JS	RESISTOR,FIXED,COMP	1
43	PAHZZ	81349	RWR81SR750FS	RESISTOR,FIXED,WIRE	1
44	PAHZZ	81349	RCR05G221JS	RESISTOR,FIXED,COMP	2
45	PAHZZ	81349	RWR81S1R82FS	RESISTOR,FIXED,WIRE	2
46	PAHZZ	81349	RCR05G682JS	RESISTOR,FIXED,COMP	1
47	PAHZZ	81349	RJR26FW202R	RESISTOR,VARIABLE,N	2
48	PAHZZ	81349	RCR05G302JS	RESISTOR,FIXED,COMP	1
49	PAHZZ	81349	RCR05G333JS	RESISTOR,FIXED,COMP	1
50	PAHZZ	81349	RCR05G272JS	RESISTOR,FIXED,COMP	1
51	PAHZZ	80063	A3030101	TRANSFORMER	1
52	PAHZZ	80063	A3030201-1	INTEGRATED CIRCUIT	1
53	PAHZZ	81349	M38510/10901BGC	MICROCIRCUIT,LINEAR	1
54	PAHZA	27014	LM105H/883B	MICROCIRCUIT,LINEAR	3
55	PAHZZ	81349	M38527/02-017D	MOUNTING PAD,ELECTR	4
				END OF FIGURE	

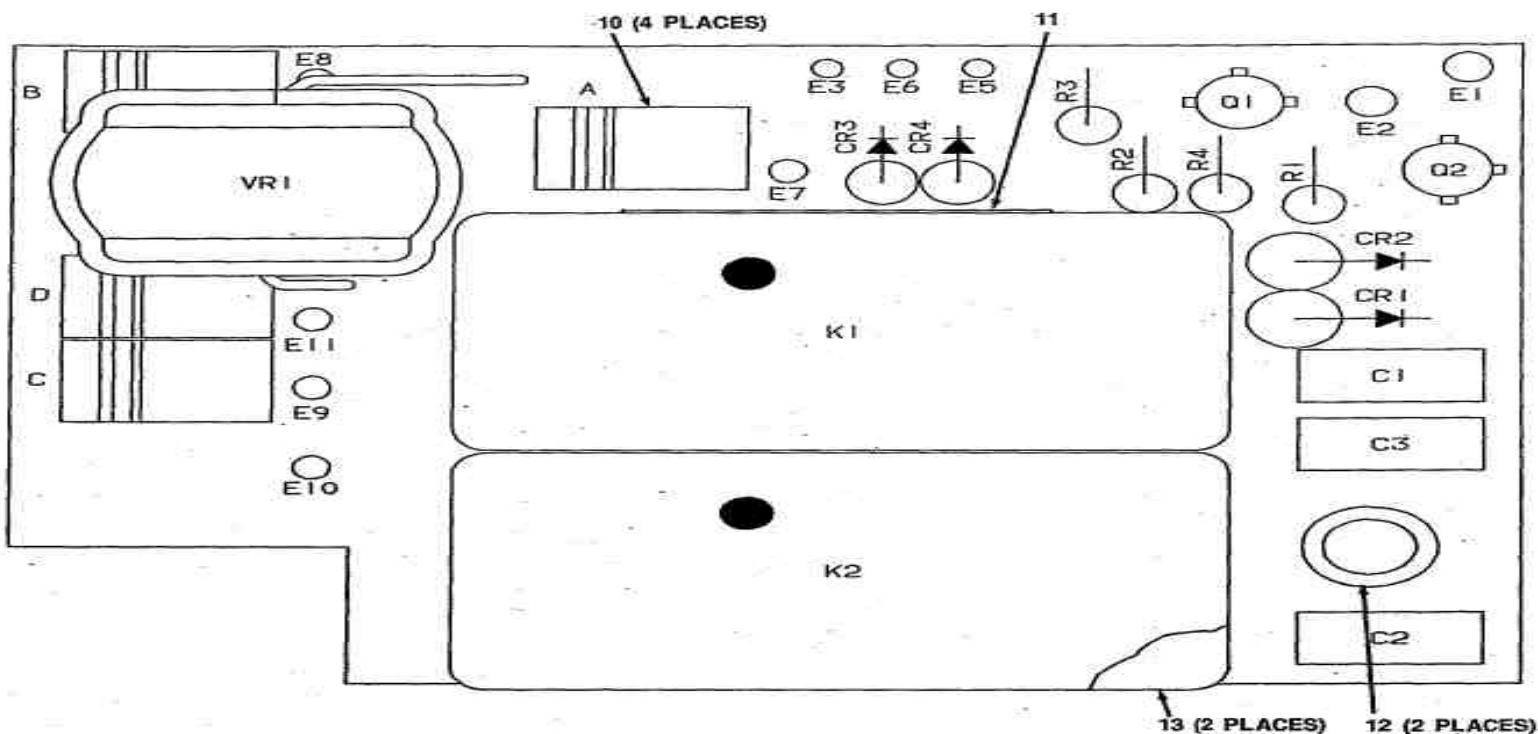

LEGEND



REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	K2	4
CR2	1	Q1	5
CR3	2	Q2	5
CR4	2	R1	6
C1	3	R2	6
C2	3	R3	7
C3	3	R4	8
K1	4	VR1	9


CEONL-037

FIGURE 20 Relay CCA (A3027346)


(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020206 RELAY CCA (A3027346)	
				FIG.20	
1	PAHZZ	81349	JAN1N3611	SEMICONDUCTOR DEVIC	2
2	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	2
3	PAHZZ	81349	M39014/01-1575	CAPACITOR, FIXED, CER	3
4	PAHZZ	02289	2KA2A126	RELAY, ELECTROMAGNET	2
5	PAHZZ	04713	MMT3904	TRANSISTOR	2
6	PAHZZ	81349	RCR05G103JS	RESISTOR, FIXED, COMP	2
7	PAHZZ	81349	RCR05G302JS	RESISTOR, FIXED, COMP	1
8	PAHZZ	81349	RCR05G513JS	RESISTOR, FIXED, COMP	1

9	PAHZZ	25088	B1C90/20	ELECTRON TUBE	1
10	PAHZA	80063	A3026769	DUMMY LOAD	4
11	XBHZZ	80063	A3031038-215	LABEL	1
12	PAHZZ	80063	A3027649-1	INSERT, SCREW THREAD	2
13	PAHZZ	80063	A3027828	TERMINAL BOARD	2
				END OF FIGURE	

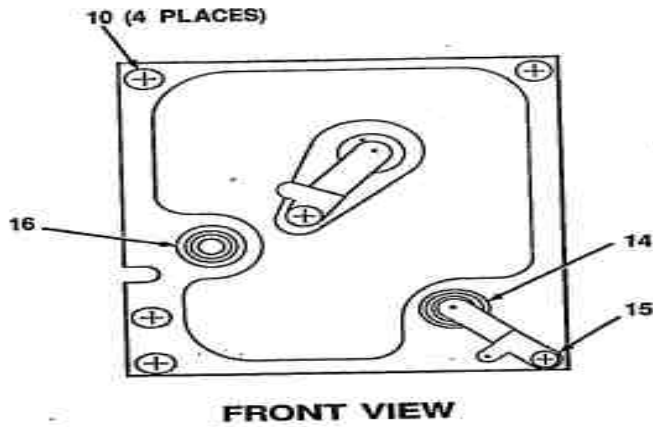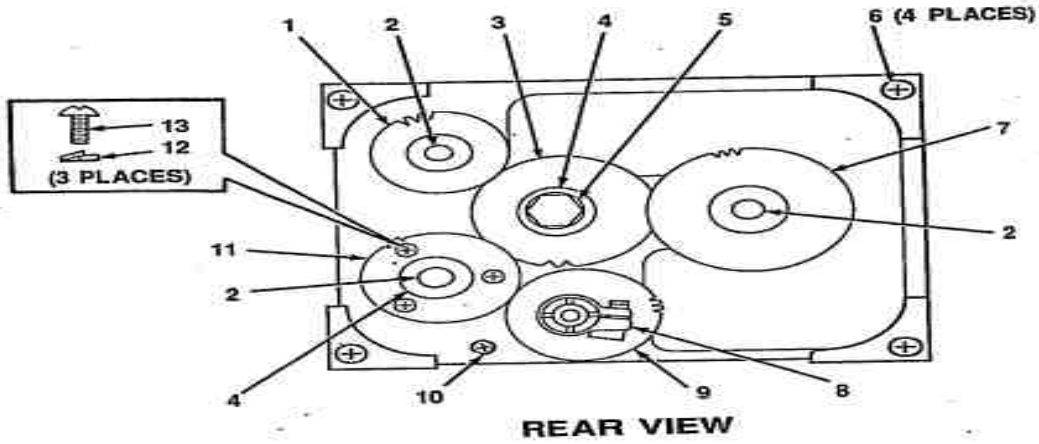


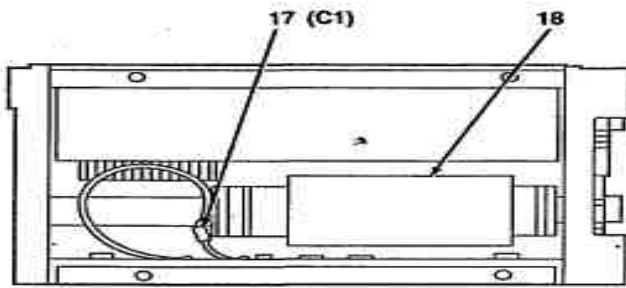


LEFT SIDE VIEW



SECTION A-A

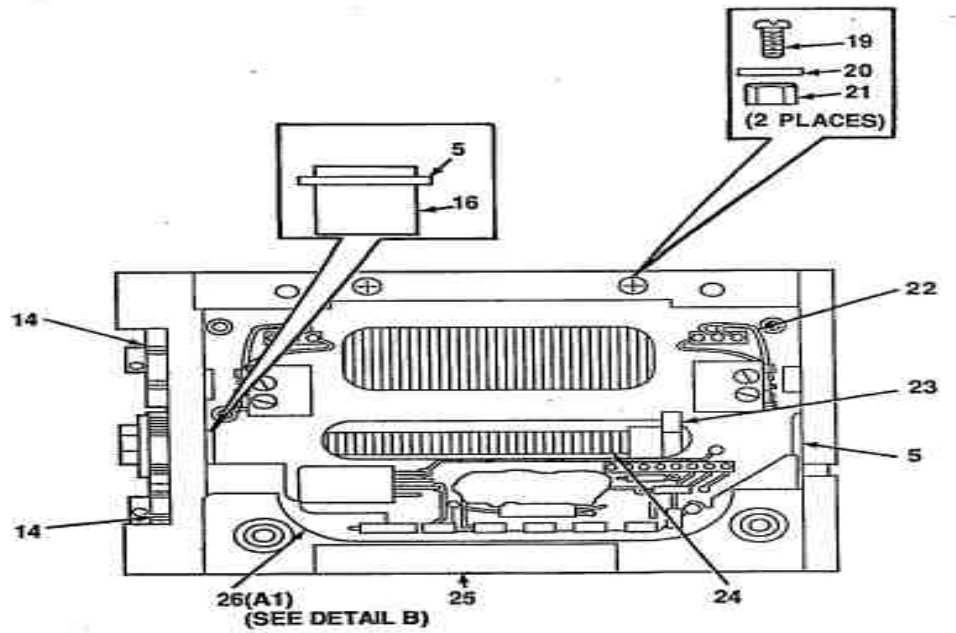


BOTTOM VIEW

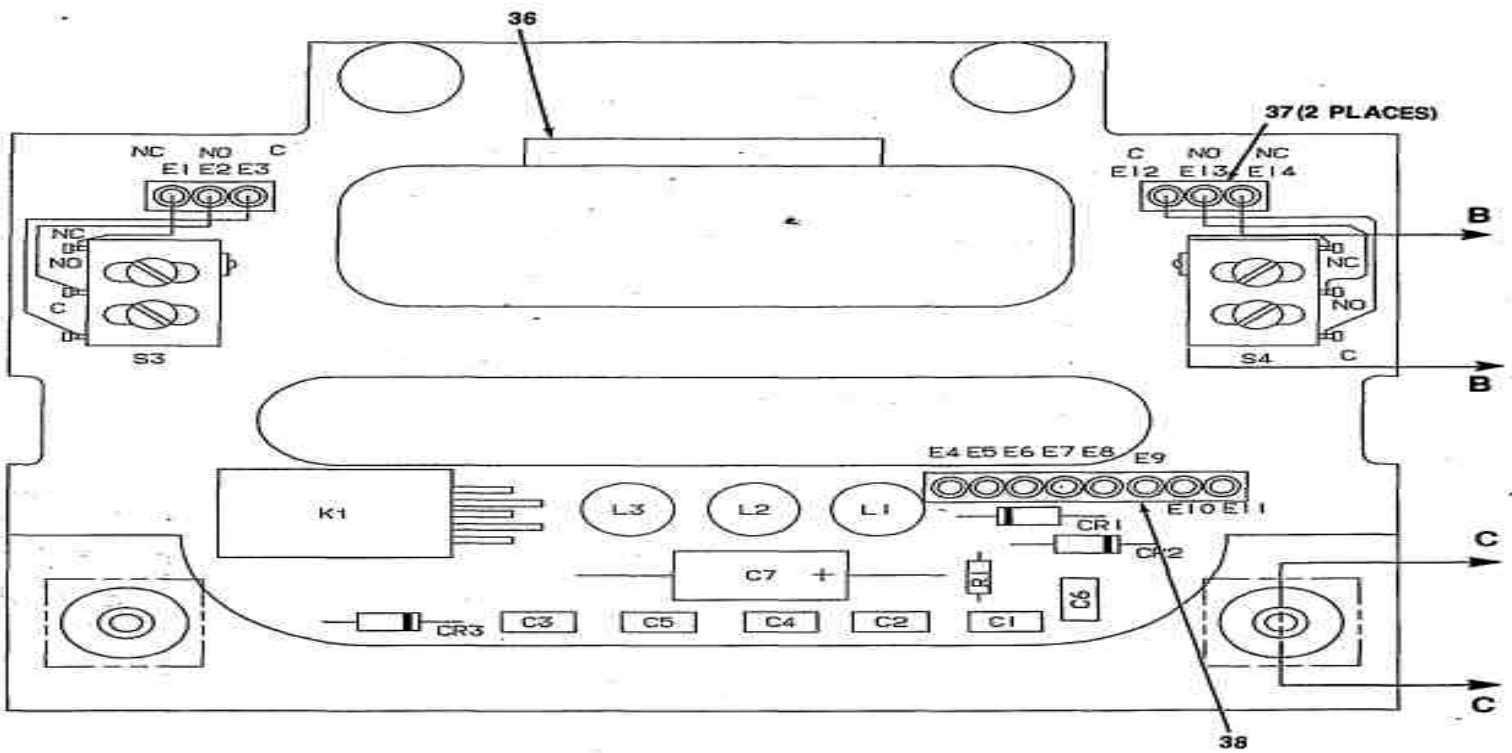

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	29	C7	31
CR2	29	K1	32
CR3	29	L1	33
C1	30	L2	33
C2	30	L3	33
C3	30	R1	34
C4	30	S3	35
C5	30	S4	35
C6	30		

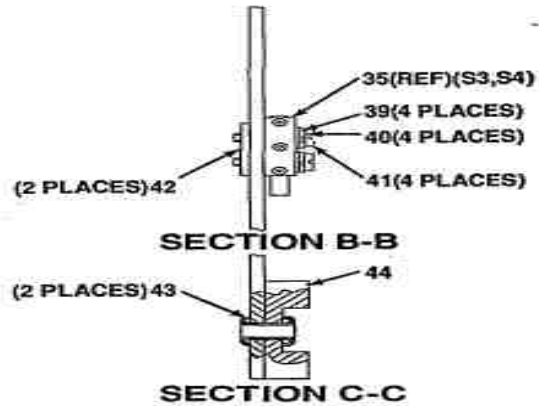

DETAIL B

GEONL-040


FIGURE 21 Coil Assy (A3030152)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020207 COIL ASSEMBLY (A3030152)	
				FIG.21	
1	PAHZZ	80063	A3027712	GEAR	1
2	PAHZZ	80063	A3027744-2	PIN,ROLL	3
3	PAHZZ	80063	A3027711	GEAR	1
4	PAHZZ	80063	A3027002	BEARING	2
5	PAHZZ	80063	A3027057-1	SNAP RING	3
6	PAHZZ	A3423	3-71492-020	SCREW,MACHINE	4
7	PAHZZ	80063	A3027709	GEAR	1

8	XBHZZ	80063	A3027713	CLAMP	1
9	PAHZZ	80063	A3027708	GEAR	1
10	PAHZZ	A3423	3-71942-017	SCREW,MACHINE	5
11	PAHZZ	80063	A3027710	GEAR	1
12	PAHZZ	A3026	3-10311-001	WASHER,LOCK	3
13	PAHZZ	80063	A3026845-4	SCREW	3
14	PAHZZ	80063	A3027725	BEARING	3
15	PAHZZ	A3423	3-71492-018	SCREW,MACHINE	1
16	PAHZZ	80063	A3027572-1	BEARING	2
17	PAHZZ	81349	M39014/01-1357	CAPACITOR,FIXED,CER	1
18	PAHZZ	80063	A3030171	GEAR MOTOR	1
19	PAHZZ	A3423	3-71492-016	SCREW,MACHINE	2
20	PAHZZ	A3026	3-10285.007//C	WASHER,FLAT	2
21	PAHZZ	80063	A3026852-3	NUT,SELF-LOCKING,HE	2
22	XBHZZ	80063	A3027694	CABLE ASSEMBLY	1
23	XBHZZ	80063	A3027714	SUPPORT	1
24	PAHZZ	80063	A3027879	SCREW,EXTERNALLY RE	1
25	XBHZZ	80063	A3031038-188	LABEL	1
26	PAHLL	80063	A3031138	CIRCUIT CARD ASSEMB	1
27	PAHZZ	A3423	3-71492-025	SCREW,MACHINE	1
28	XBHZZ	80063	A3031431	SHAFT,IDLER	1
29	PAHZZ	81349	JAN1N3611	SEMICONDUCTOR DEVIC	3
30	PAHZZ	81349	M39014/01-1593	CAPACITOR,FIXED,CER	6
31	PAHZZ	80063	CLR65BB560KGL	CAPACITOR 56UF	1
32	PAHZZ	80063	A3030157	RELAY,ELECTROMAGNET	1
33	PAHZZ	80063	A3030114	TRANSFORMER	3
34	PAHZZ	81349	RCR05G102JS	RESISTOR,FIXED,COMP	1
35	PAHZZ	80207	MML2	SWITCH,SENSITIVE	2
36	XBHZZ	80063	A3031038-203	LABEL	1
37	PAHZZ	A3026	4-74796-001	TERMINAL BOARD	2
38	PAHZZ	A3026	4-74796-004	TERMINAL BOARD	1
39	PAHZZ	A3026	3-10285.006//C	WASHER,FLAT	4
40	PAHZZ	A3026	3-10311-002	WASHER,LOCK	4
41	PAHZZ	96906	MS51957-5	SCREW,MACHINE	4
42	XBHZZ	80063	A3027765	PLATE	1
43	PAHZZ	A2728	0U-30.55	EYELET	2
44	PAHZZ	80063	A3027916	SUPPORT,BASE,INDUCT	2
				END OF FIGURE	

LEGEND

REF. DES.	ITEM NO.
CR1	1
CR2	2
J5	3
K1	4

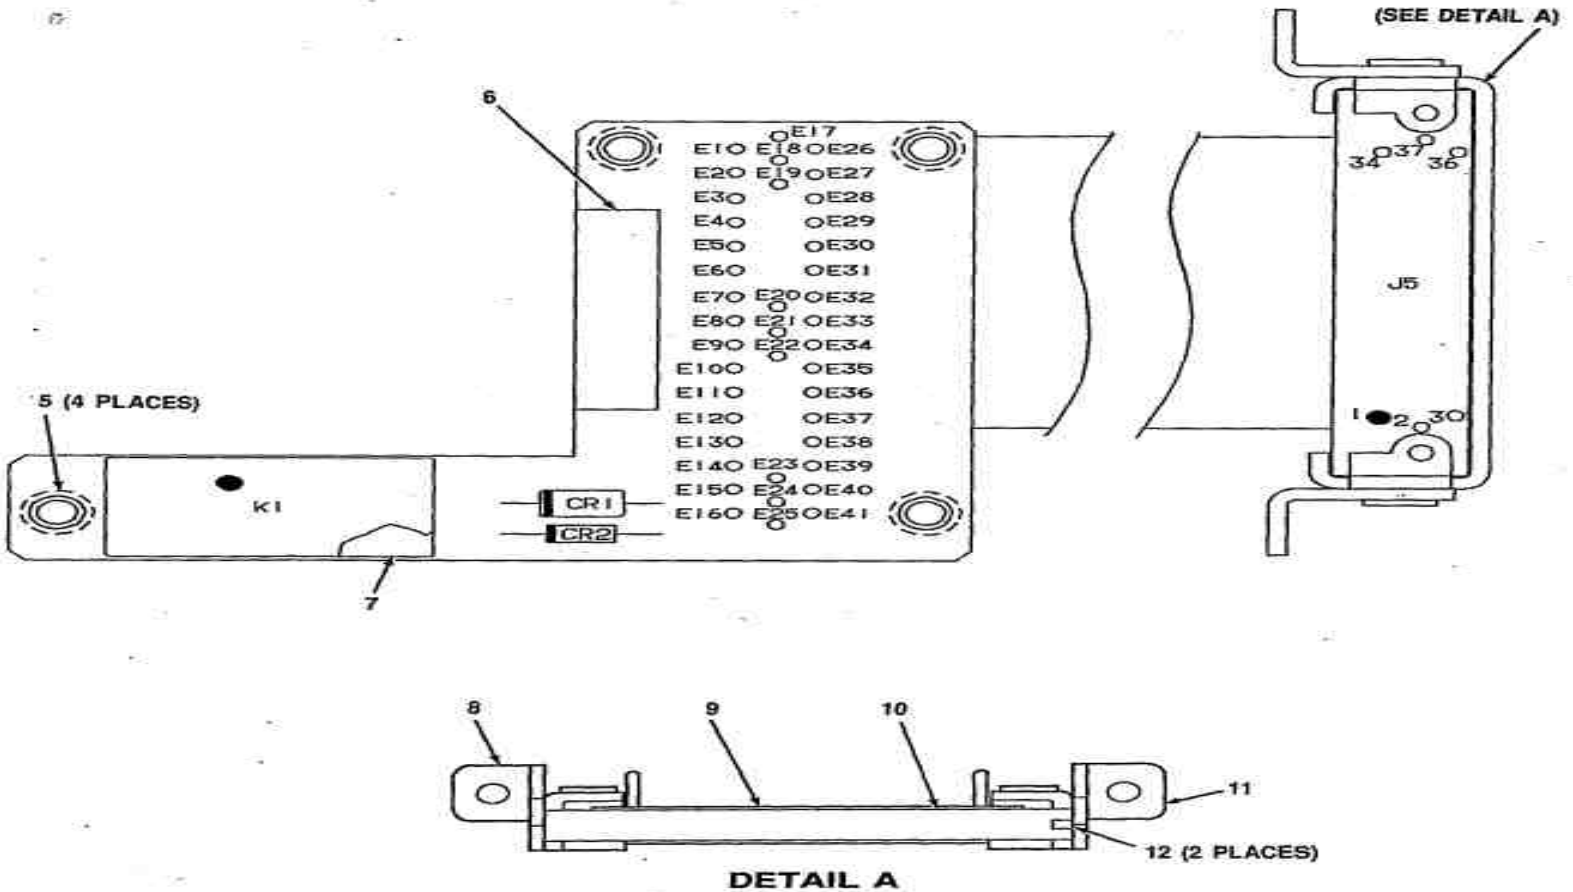


GEONL-041

FIGURE 22 Interface CCA A1A2A20A18 (A3027685)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020208 INTERFACE CCA (A3027685)	
				FIG.22	
1	PAHZZ	81349	JAN1N3957	SEMICONDUCTOR DEVIC	1
2	PAHZZ	14099	1N6075	SEMICONDUCTOR DEVIC	1
3	XBHLL	80063	A3027953	CONTACT ASSEMBLY,EL	1
4	PAHZZ	02289	2HA2A126	RELAY,ELECTROMAGNET	1
5	XBHZZ	80063	A3027798	SPACER,SLEEVE	4
6	XBHZZ	80063	A3031038-213	LABEL	1

7	PAHZZ	80063	A3027828	TERMINAL BOARD	1
8	XBHZZ	80063	A3027696-2	BRACKET	1
9	PAHZZ	81349	M55302/8-03	CONNECTOR,RECEPTACL	1
10	PAHZZ	80063	A3027911	SUPPORT,CONNECTOR	1
11	XBHZZ	80063	A3027696-1	BRACKET	1
12	PAHZZ	80063	A3027799	RIVET,BLIND	2
END OF FIGURE					

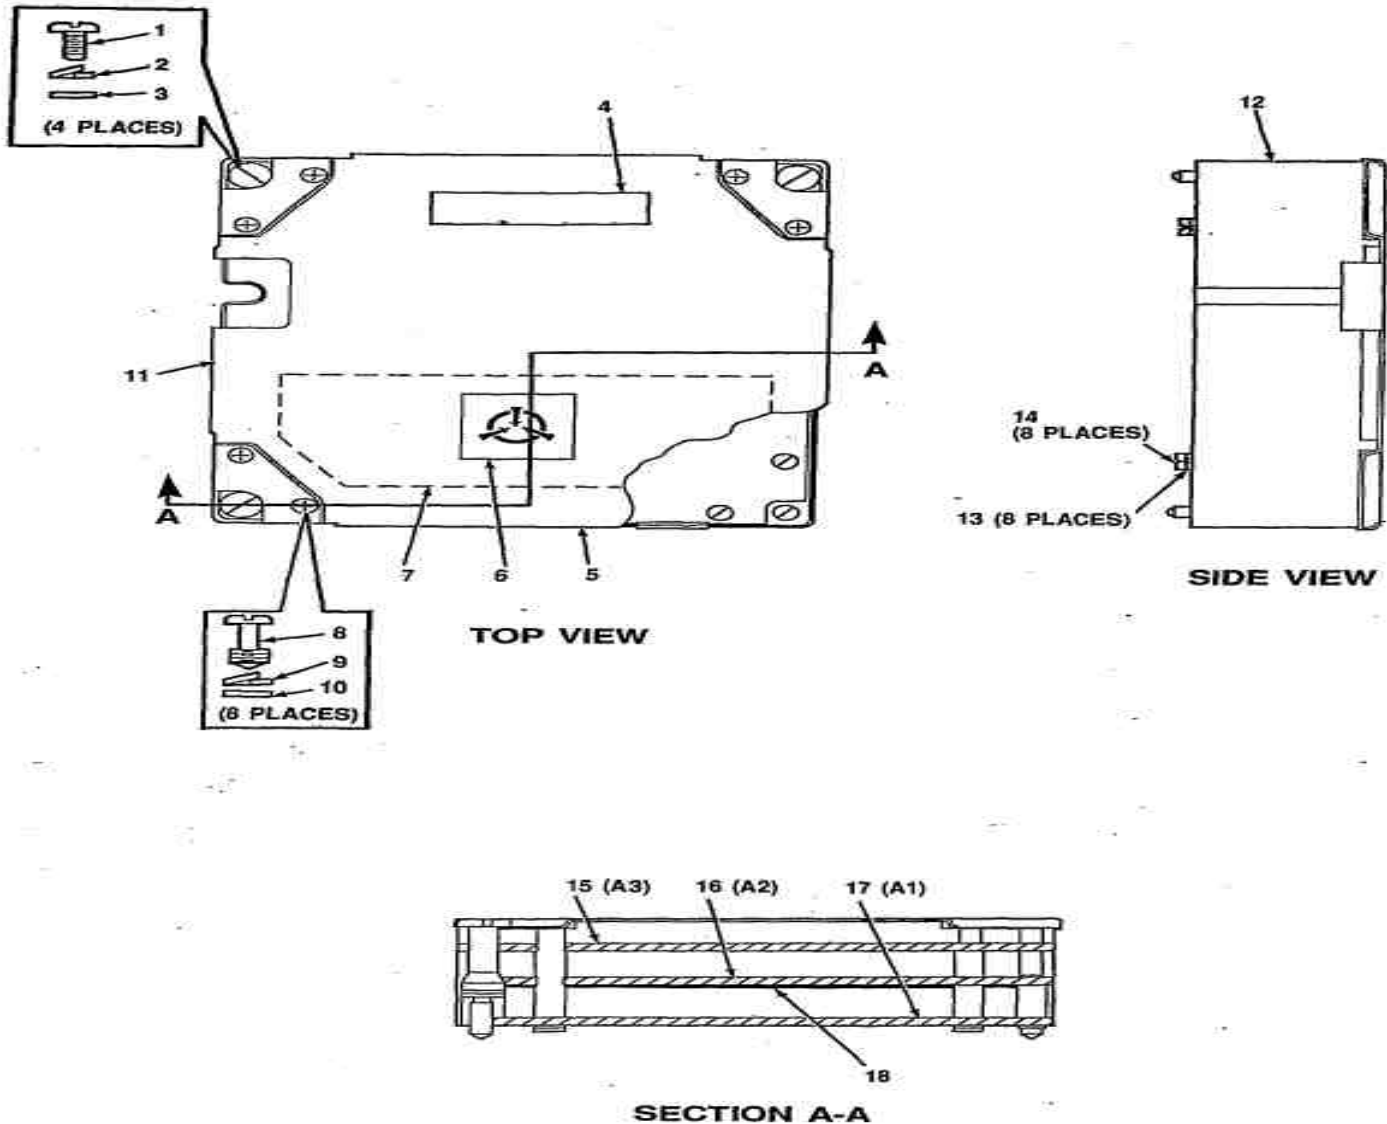



CEONL-042

FIGURE 23 Synthesizer Module Assy A1A2A3 (A3026003)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 010203 SYNTHESIZER MODULE ASSEMBLY A1A2A3 (A3026003)	

				FIG.23	
1	PAHZZ	80063	A3027698	SCREW,SPECIAL	4
2	XBHZZ	A3026	3-10311-003	WASHER,LOCK	4
3	XBHZZ	80063	A3027737-1	WASHER,FLAT	4
4	XBHZZ	80063	A3031038-206	LABEL	1
5	XBHLL	80063	A3027865	COVER,SYNTHESIZER M	1
6	XBHZZ	80063	A3034571-1	LABEL,ELECTROSTATI	1
7	PAHZZ	80063	A3031258	INSULATOR	1
8	PAHZZ	80063	A3027007-1	SCREW,CAPTIVE	8
9	XBHZZ	A3026	3-10311-002	WASHER,LOCK	8
10	PAHZZ	A3026	3-10285.005//C	WASHER,FLAT	8
11	XBHZZ	80063	A3027866	COVER	1
12	XBHZZ	80063	A3027863	ENCLOSURE,SYNTHESIZ	1
13	PAHZZ	A3026	3-10311-002	WASHER,LOCK	8
14	PAHZZ	96906	MS51957-9	SCREW,MACHINE	8
15	PBHLA	80063	A3027688	CIRCUIT CARD ASSEMB (SEE FIG. 30 FOR BREAKDOWN)	1
16	PBHLA	80063	A3027687	CIRCUIT CARD ASSEMB (SEE FIG. 29 FOR BREAKDOWN)	1
17	PAHLA	80063	A3031111	CIRCUIT CARD ASSEMB (SEE FIG. 24 FOR BREAKDOWN)	1
18	PAHZZ	80063	A3031162	INSULATOR	1
				END OF FIGURE	

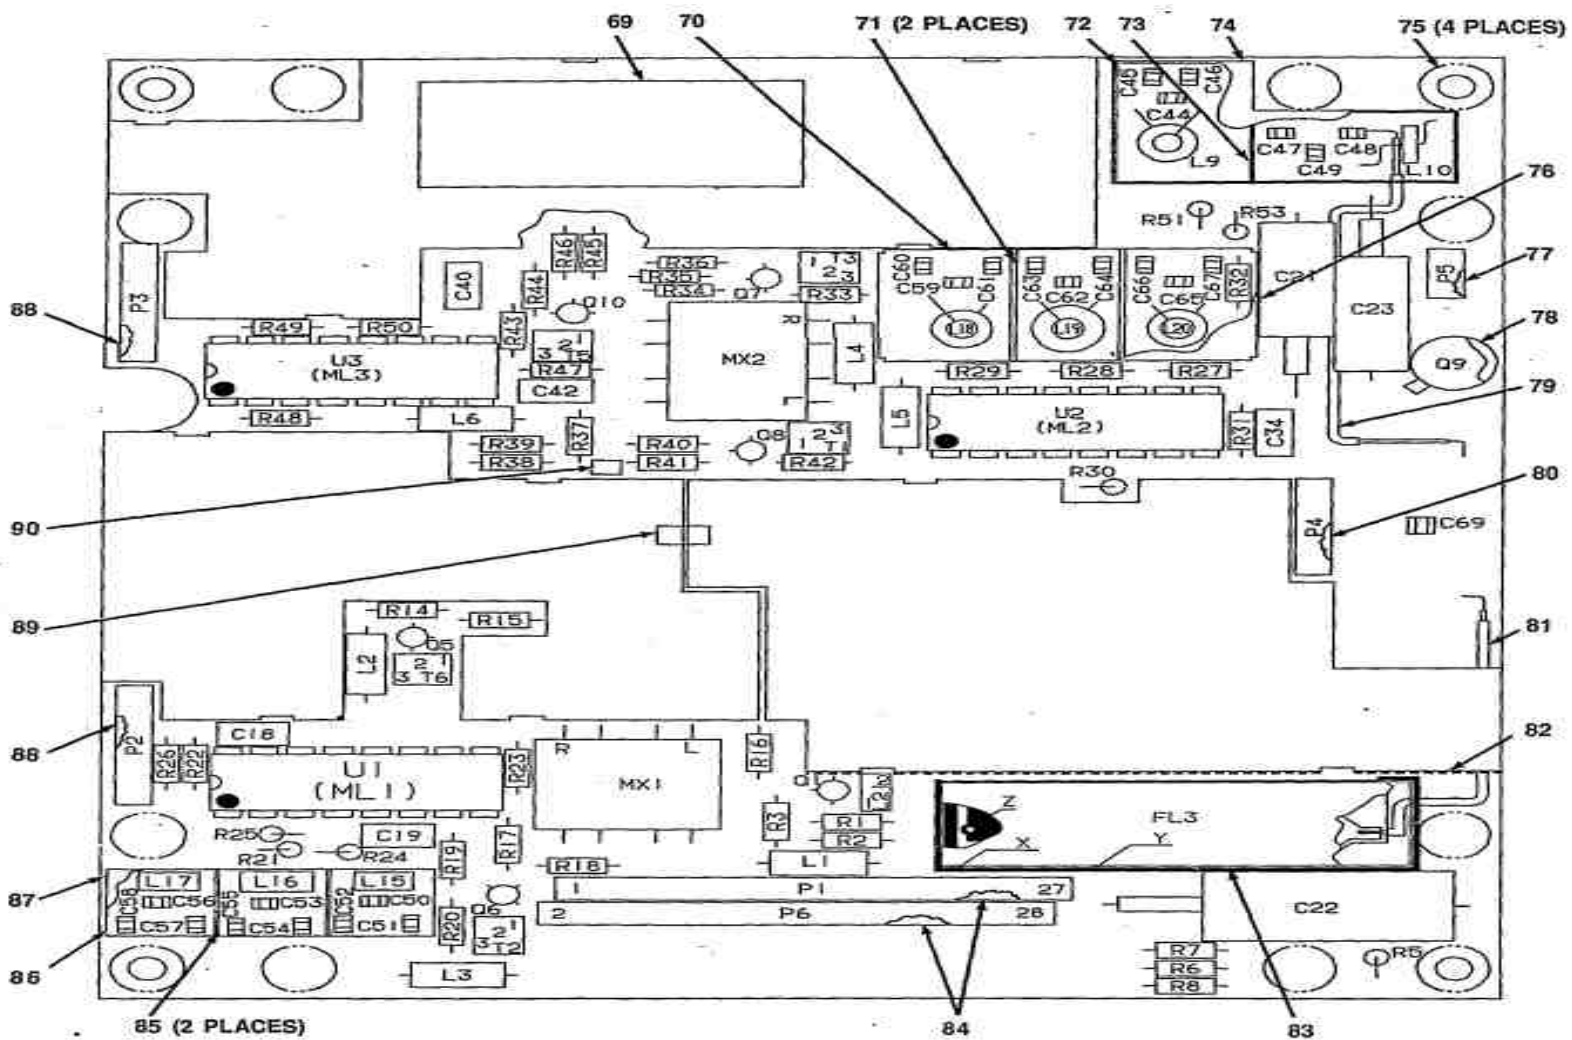

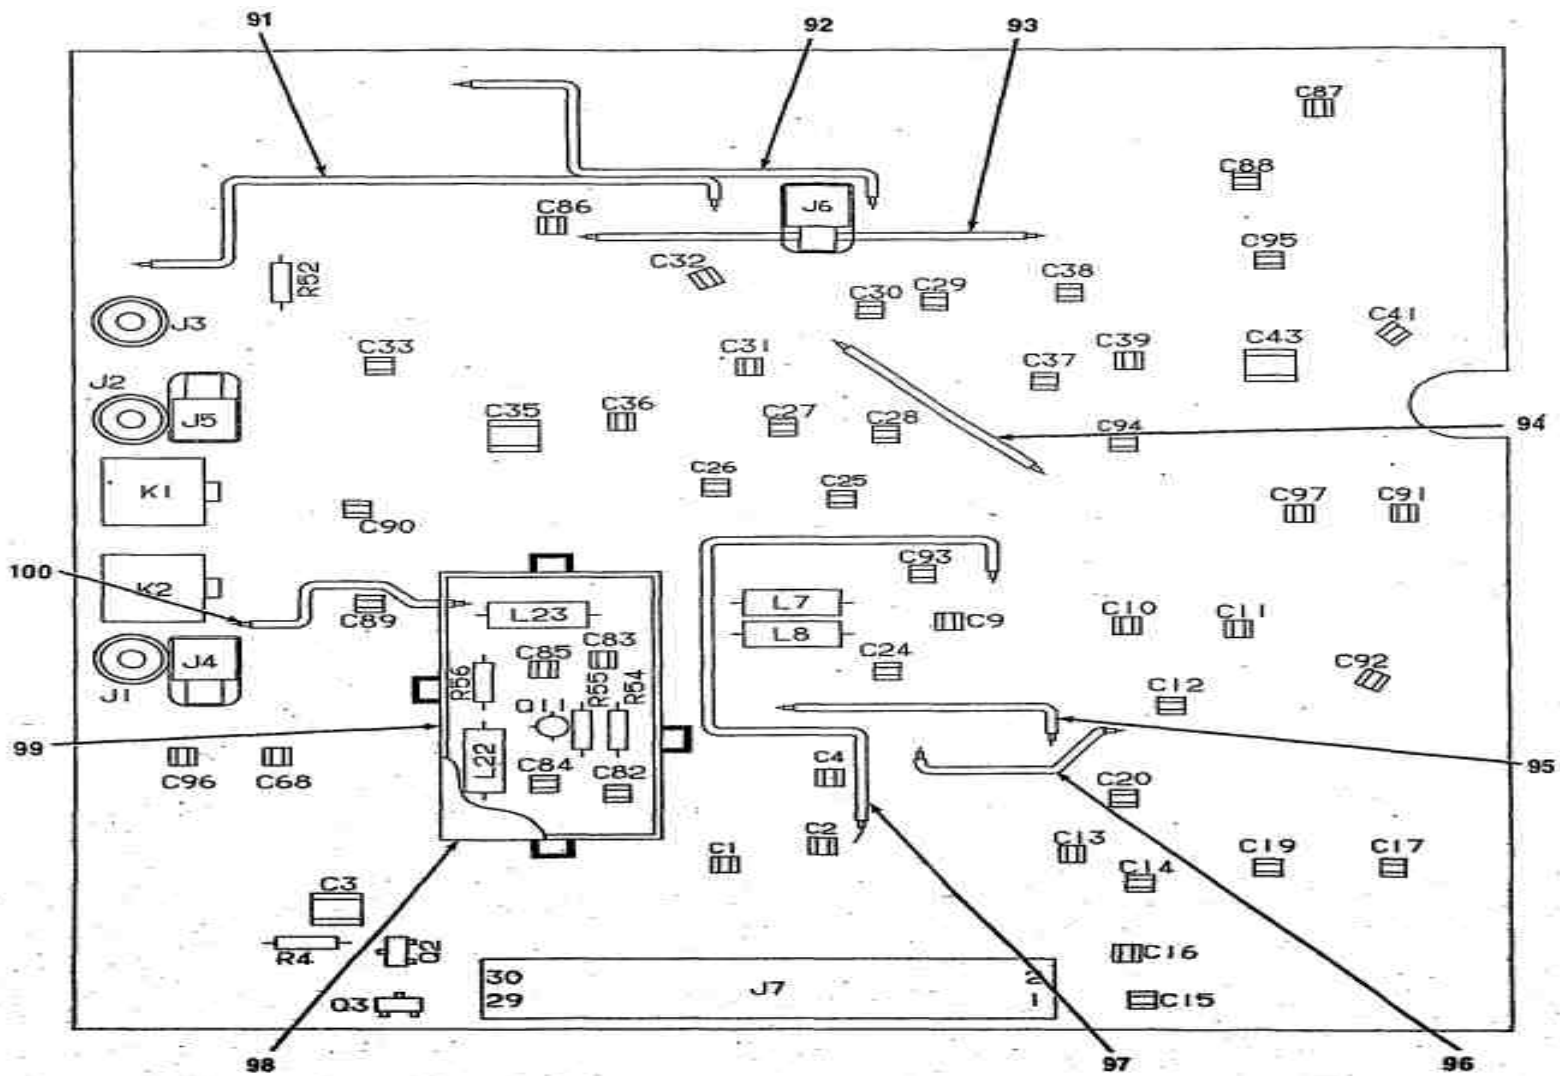

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
A1	1	C34	6	C66	16	L3	27	Q9	43	R35	53
A2	2	C35	5	C67	15	L4	27	Q10	40	R36	52
A3	3	C36	4	C68	4	L5	27	Q11	40	R37	61
C1	4	C37	4	C69	4	L6	27	R1	44	R38	62
C2	4	C38	4	C82	20	L7	27	R2	45	R39	62
C3	5	C39	4	C83	4	L8	27	R3	46	R40	51
C4	4	C40	9	C84	20	L9	28	R4	47	R41	45
C9	4	C41	4	C85	4	L10	29	R5	48	R42	44
C10	4	C42	6	C86	4	L15	30	R6	49	R43	55
C11	4	C43	5	C87	21	L16	31	R7	49	R44	54
C12	4	C44	10	C88	21	L17	28	R8	50	R45	53
C13	4	C45	11	C89	21	L18	28	R14	44	R46	52
C14	4	C46	11	C90	21	L19	31	R15	45	R47	57
C15	4	C47	12	C91	21	L20	30	R16	51	R48	60
C16	4	C48	12	C92	21	L21	32	R17	52	R49	58
C17	4	C49	13	C93	4	L22	33	R18	53	R50	45
C18	6	C50	14	C94	4	L23	34	R19	54	R51	59
C19	5	C51	15	C95	21	MX1	35	R20	55	R52	62
C20	4	C52	16	C96	21	MX2	35	R21	56	R53	58
C21	7	C53	17	C97	21	P1	36	R22	57	R54	63
C22	8	C54	18	FL3	22	P2	37	R23	58	R55	64
C23	7	C55	18	J1	23	P3	37	R24	59	R56	65
C24	4	C56	18	J2	23	P4	38	R25	45	T1	66
C25	4	C57	12	J3	23	P5	39	R26	60	T2	66
C26	4	C58	19	J4	24	P6	36	R27	60	T3	66
C27	4	C59	18	J5	24	Q1	40	R28	45	T5	66
C28	4	C60	19	J6	24	Q2	41	R29	58	T6	66
C29	4	C61	12	J7	25	Q3	42	R30	59	U1	67
C30	4	C62	17	K1	26	Q5	40	R31	57	U2	67
C31	4	C63	18	K2	26	Q6	40	R32	56	U3	68
C32	4	C64	18	L1	27	Q7	40	R33	55		
C33	4	C65	14	L2	27	Q8	40	R34	54		

GEONL-045


FIGURE 24 Oscillator CCA (A3031111)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020301 OSCILLATOR CCA (A3031111)	
				FIG.24	
1	PAHLL	80063	A3031168	CIRCUIT CARD ASSEMB (SEE FIG. 25 FOR BREAKDOWN)	1
2	PAHLL	80063	A3031169	CIRCUIT CARD ASSEMB	1
3	PAHLL	80063	A3031170	CIRCUIT CARD ASSEMB	1
4	PAHZZ	29990	ATC700A102FC50X	CAPACITOR, FIXED, CER	35
5	PAHZZ	29990	ATC200B104NC50X	CAPACITOR, FIXED, CER	4
6	PAHZZ	81349	M39014/01-1575	CAPACITOR, FIXED, CER	3

7	PAHZZ	60935	402/1/57613/016	CAPACITOR,FIXED,ELE	2
8	PAHZZ	60935	402/1/57625/020	CAPACITOR,FIXED,ELE;	1
9	PAHZZ	81349	M39014/01-1357	CAPACITOR,FIXED,CER	1
10	PAHZZ	29990	ATC100A9R1BC50X	CAPACITOR,FIXED,CER	1
11	PAHZZ	29990	ATC100A750JC50X	CAPACITOR,FIXED,CER	2
12	PAHZZ	29990	ATC100A240FC50X	CAPACITOR,FIXED,CER	4
13	PAHZZ	29990	ATC700A201FC50X	CAPACITOR,FIXED,CER	1
14	PAHZZ	29990	ATC100A8R2CC50X	CAPACITOR,FIXED,CER	2
15	PAHZZ	29990	ATC100A510FC50X	CAPACITOR,FIXED,CER	2
16	PAHZZ	29990	ATC100A330JC50X	CAPACITOR,FIXED,CER	2
17	PAHZZ	29990	ATC100A430FC50X	CAPACITOR,FIXED,CER	2
18	PAHZZ	29990	ATC100A300FC50X	CAPACITOR,FIXED,CER	6
19	PAHZZ	29990	ATC100A360JC50X	CAPACITOR,FIXED,CER	2
20	PAHZZ	29990	ATC100A200JC50X	CAPACITOR,FIXED,CER	2
21	PAHZZ	29990	ATC200B103KC50X	CAPACITOR,FIXED,CER	9
22	PAHLL	80063	A3031184	CIRCUIT CARD ASSEMB (SEE FIG. 28 FOR BREAKDOWN)	1
23	PAHZZ	98291	52-452-0000	CONNECTOR,RECEPTACL	3
24	PAHZZ	07187	4022893-001	CONNECTOR,RECEPTACL	3
25	PAHZZ	A1631	281216-2	CONNECTOR,PLUG,RECE	1
26	PAHZZ	81349	M39016/19-042L	RELAY,ELECTROMAGNET	2
27	PAHZZ	96906	MS75083-13	COIL,RADIO FREQUENC	8
28	PAHZZ	80063	A3030147	INDUCTOR	3
29	PAHZZ	80063	A3030149	INDUCTOR	1
30	PAHZZ	80063	A3030148	INDUCTOR	2
31	PAHZZ	80063	A3030150	INDUCTOR	2
32	PAHZZ	80063	A3031188	RF INDUCTOR ASSEMBL	1
33	PAHZZ	96906	MS75083-7	COIL,RADIO FREQUENC	1
34	PAHZZ	96906	MS75084-4	COIL,RADIO FREQUENC	1
35	PAHZZ	80063	A3030174	MIXER STAGE,FREQUEN	2
36	PAHZZ	F7303	3310416114500	CONNECTOR,PRINTED C	2
37	PAHZZ	F7303	3310416105500	CONNECTOR,PRINTED C	2
38	PAHZZ	F7303	3310416104500	CONNECTOR,PRINTED C	1
39	PAHZZ	F7303	3310416102500	CONNECTOR,PRINTED C	1
40	PAHZZ	12436	V00691-001	TRANSISTOR	7
41	PAHZZ	04713	MMBT2907	TRANSISTOR	1
42	PAHZZ	89536	483743	TRANSISTOR	1
43	PAHZZ	81349	JAN2N2222A	TRANSISTOR	1

44	PAHZZ	81349	RCR05G242JS	RESISTOR,FIXED,COMP	3
45	PAHZZ	81349	RCR05G152JS	RESISTOR,FIXED,COMP	6
46	PAHZZ	81349	RCR05G151JS	RESISTOR,FIXED,COMP	1
47	PAHZZ	81349	RCR056103JS	RESISTOR,FIXED,COMP	1
48	PAHZZ	81349	RCR05G221JS	RESISTOR,FIXED,COMP	1
49	PAHZZ	81349	RCR05G562JS	RESISTOR,FIXED,COMP	2
50	PAHZZ	81349	RCR05G513JS	RESISTOR,FIXED,COMP	1
51	PAHZZ	81349	RCR05G301JS	RESISTOR,FIXED,COMP	2
52	PAHZZ	81349	RCR05G270JS	RESISTOR,FIXED,COMP	3
53	PAHZZ	81349	RCR05G751JS	RESISTOR,FIXED,COMP	3
54	PAHZZ	81349	RCR05G203JS	RESISTOR,FIXED,COMP	3
55	PAHZZ	81349	RCR05G153JS	RESISTOR,FIXED,COMP	3
56	PAHZZ	81349	RCR05G510JS	RESISTOR,FIXED,COMP	2
57	PAHZZ	81349	RCR05G473JS	RESISTOR,FIXED,COMP	3
58	PAHZZ	81349	RCR05G102JS	RESISTOR,FIXED,COMP	4
59	PAHZZ	81349	RCR05G100JS	RESISTOR,FIXED,COMP	3
60	PAHZZ	81349	RCR05G362JS	RESISTOR,FIXED,COMP	3
61	PAHZZ	81349	RCR05G750JS	RESISTOR,FIXED,COMP	1
62	PAHZZ	81349	RCR05G101JS	RESISTOR,FIXED,COMP	3
63	PAHZZ	81349	RCR05G822JS	RESISTOR,FIXED,COMP	1
64	PAHZZ	81349	RCR05G512JS	RESISTOR,FIXED,COMP	1
65	PAHZZ	81349	RCR05G131JS	RESISTOR,FIXED,COMP	1
66	PAHZZ	80063	A3030142	TRANSFORMER	5
67	PAHZZ	52648	SP8691AB	MICROCIRCUIT	2
68	PAHZZ	52648	SP8690AB	MICROCIRCUIT,DIGITA	1
69	XBHZZ	80063	A3031038-58	LABEL	1
70	XBHZZ	80063	A3030770	SHIELD,TERMINAL BOA	1
71	XBHZZ	80063	A3030757	SHIELD,ELECTRICAL,C	2
72	XBHZZ	80063	A3031552	SHIELD,TERMINATION	1
73	XBHZZ	80063	A3030911	SHIELD,ELECTRICAL,C	1
74	XBHZZ	80063	A3031553	COVER	1
75	XBHZZ	80063	A3027782	BUSHING	4
76	XBHZZ	80063	A3030769	COVER,TERMINAL BOAR	1
77	PAHZZ	80063	A3031164-1	SHIM	1
78	PAHZZ	13103	445214-102	INSULATOR--TRANSIST	1
79	XBHZZ	80063	A3030708-14	CABLE	1
80	PAHZZ	80063	A3031164-2	SHIM	1
81	XBHZZ	80063	A3030708-13	CABLE	1

82	PAHZZ	80063	A3031554	BUS,CONDUCTOR	1
83	PAHZZ	80063	A3031165	COVER-FL3	1
84	PAHZZ	80063	A3031164-4	SHIM	2
85	XBHZZ	80063	A3030754	PLATE,ELECTRICAL SH	2
86	XBHZZ	80063	A3030753	COVER,TERMINAL BOAR	1
87	XBHZZ	80063	A3030752	COVER,TERMINAL BOAR	1
88	PAHZZ	80063	A3031164-3	SHIM	2
89	PAHZZ	80063	A3026941-3	BUS,CONDUCTOR	1
90	PAHZZ	80063	A3026941-10	BUS,CONDUCTOR	1
91	XBHZZ	80063	A3030708-6	CABLE	1
92	PAHZZ	80063	A3030708-5	CABLE	1
93	XBHZZ	80063	A3030708-18	CABLE	1
94	XBHZZ	80063	A3030708-7	CABLE	1
95	XBHZZ	80063	A3030708-11	CABLE	1
96	XBHZZ	80063	A3030708-12	CABLE	1
97	XBHZZ	80063	A3030708-10	CABLE	1
98	XBHZZ	80063	A3031167	COVER	1
99	XBHZZ	80063	A3031166	FRAME	1
100	XBHZZ	80063	A3030708-9	CABLE	1
				END OF FIGURE	

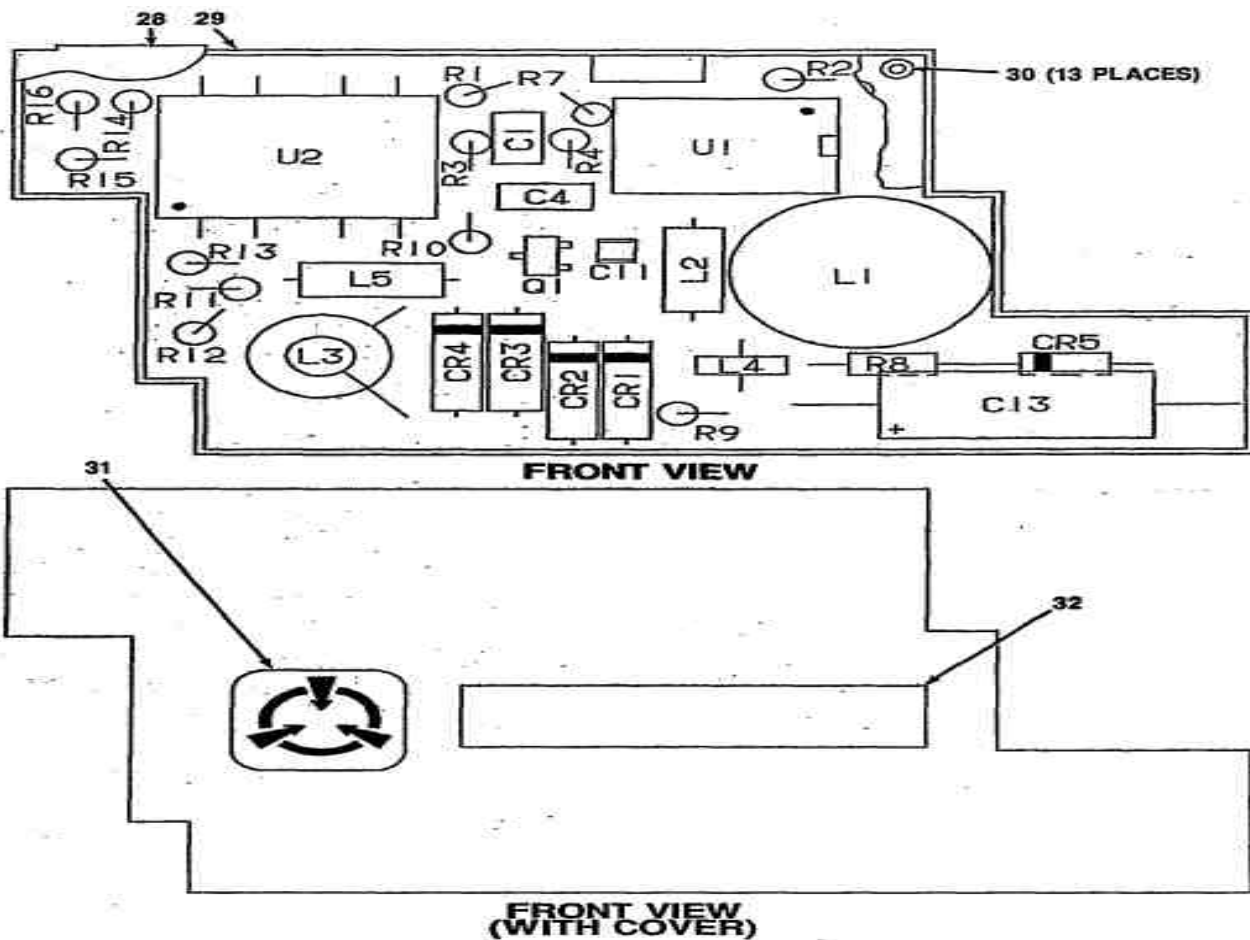

LEGEND



REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C3	5	C10	10	L2	15	R3	20	R12	25
CR2	1	C4	3	C11	11	L3	16	R4	20	R13	21
CR3	1	C5	4	C12	10	L4	17	R7	21	R14	21
CR4	1	C6	6	C13	12	L5	15	R8	22	R15	25
CR5	2	C7	7	C14	13	Q1	18	R9	23	R16	21
C1	3	C8	8	C15	10	R1	19	R10	24	U1	26
C2	4	C9	9	L1	14	R2	19	R11	21	U2	27


GEONL-045

FIGURE 25 CCA (A3031168)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102030101 CCA (A3031168)	
				FIG.25	
1	PAHZZ	04713	MV1404H	SEMICONDUCTOR DEVIC	4
2	PAHZZ	81349	JANTX1N4454	SEMICONDUCTOR DEVIC	1
3	PAHZZ	F2220	MTN1R.47UF16V20%	CAPACITOR,FIXED,TAN	2
4	PAHZZ	29990	ATC200B473KC50X	CAPACITOR,FIXED,CER	2
5	PAHZZ	29990	ATC100A470JC50X	CAPACITOR,FIXED,CER	1
6	PAHZZ	29990	ATC200B223KC50X	CAPACITOR,FIXED,CER	1
7	PAHZZ	29990	ATC200B822KC50X	CAPACITOR,FIXED	1
8	PAHZZ	29990	ATC200B393KC50X	CAPACITOR,FIXED,CER	1

9	PAHZZ	29990	ATC100A5R1CC50X	CAPACITOR, FIXED, CER	1
10	PAHZZ	29990	ATC700A102FC50X	CAPACITOR, FIXED, CER	3
11	PAHZZ	29990	ATC100A150JC50X	CAPACITOR, FIXED, CER	1
12	PAHZZ	60935	402/1/57613/016	CAPACITOR, FIXED, ELE	1
13	PAHZZ	29990	ATC100A240FC50X	CAPACITOR, FIXED, CER	1
14	PAHZZ	81349	M27/240-06	REACTOR	1
15	PAHZZ	96906	MS75083-13	COIL, RADIO FREQUENC	2
16	PAHZZ	80063	A3030146	INDUCTOR	1
17	PAHZZ	80063	A3030915	INDUCTOR	1
18	PAHZZ	04713	MMBFU310	TRANSISTOR	1
19	PAHZZ	81349	RCR05G153JS	RESISTOR, FIXED, COMP	2
20	PAHZZ	81349	RCR05G622JS	RESISTOR, FIXED, COMP	2
21	PAHZZ	81349	RCR05G151JS	RESISTOR, FIXED, COMP	5
22	PAHZZ	81349	RCR05G510JS	RESISTOR, FIXED, COMP	1
23	PAHZZ	81349	RCR05G134JS	RESISTOR, FIXED, COMP	1
24	PAHZZ	81349	RCR05G101JS	RESISTOR, FIXED, COMP	1
25	PAHZZ	81349	RCR05G390JS	RESISTOR, FIXED, COMP	2
26	PAHZZ	81349	JM38510/13101BPX	MICROCIRCUIT, LINEAR	1
27	PAHZZ	50021	DL233	DIVIDER, POWER, RADIO	1
28	XBHZZ	80063	A3031173	COVER, SHIELD-LOOP A	1
29	XBHZZ	80063	A3031172	FRAME	1
30	PAHZZ	80063	A3031189	SPACER	13
31	PAHZZ	80063	A3034571-2	LABEL, ELECTROSTATI	1
32	XBHZZ	80063	A3031308-207	LABEL	1
				END OF FIGURE	

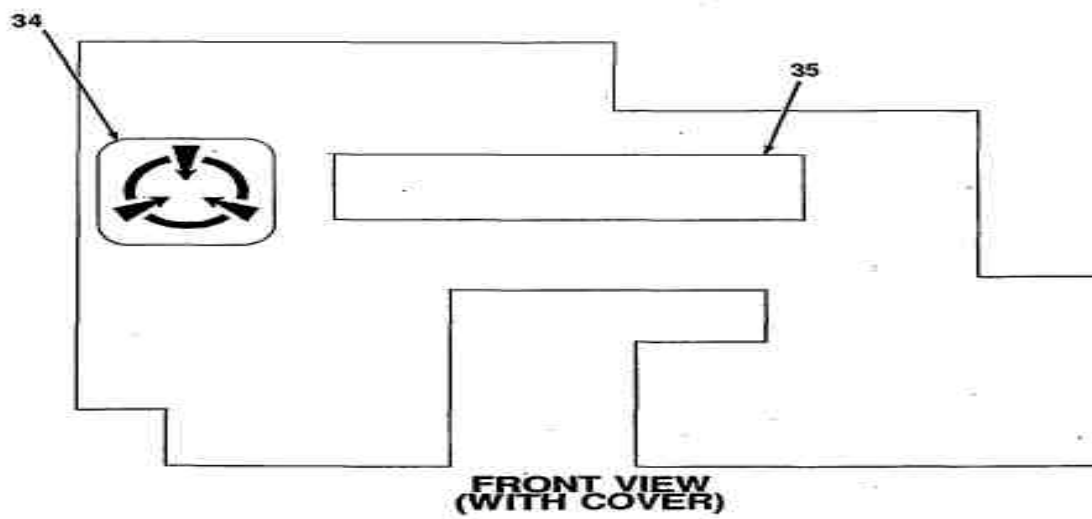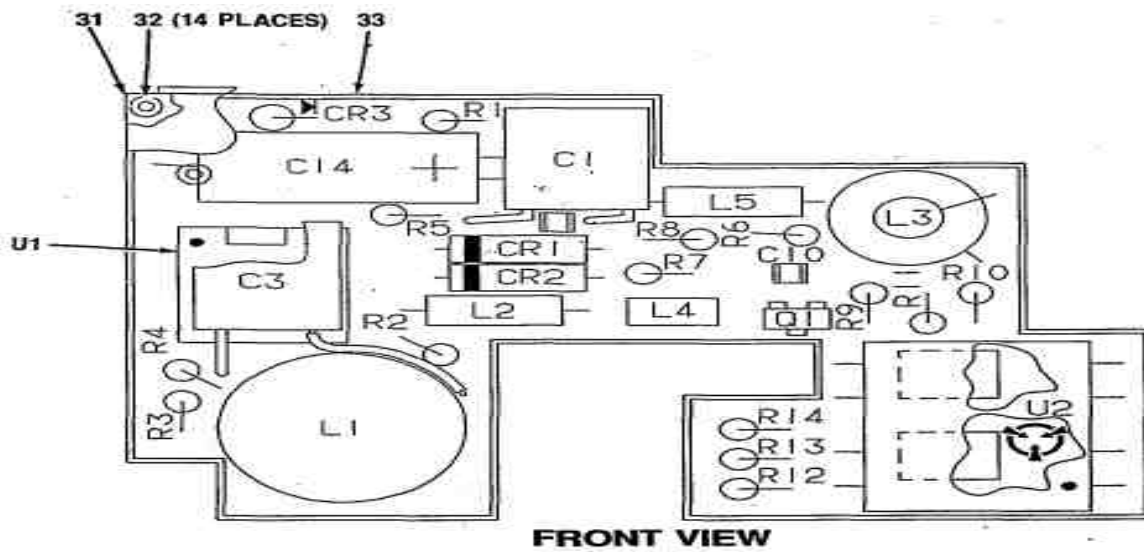

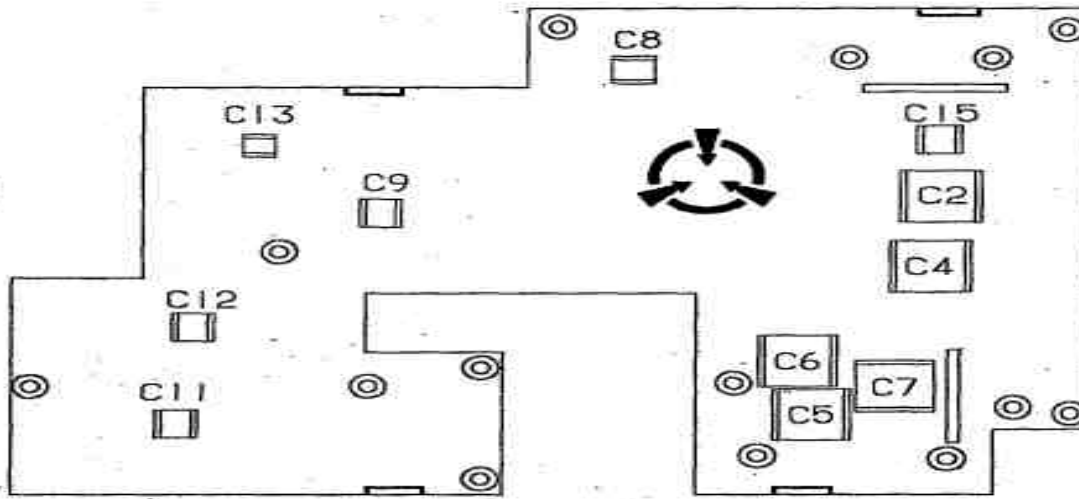

REAR VIEW

LEGEND


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C5	5	C12	8	L3	17	R4	20	R11	27
CR2	1	C6	6	C13	11	L4	18	R5	22	R12	25
CR3	2	C7	7	C14	12	L5	16	R6	23	R13	28
C1	3	C8	8	C15	13	Q1	19	R7	24	R14	25
C2	4	C9	8	C16	14	R1	20	R8	25	U1	29
C3	3	C10	9	L1	15	R2	21	R9	26	U2	30
C4	4	C11	10	L2	16	R3	21	R10	26		

CEONL-073

FIGURE 26 CCA (A3031169)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102030102 CCA (A3031169)	
				FIG.26	
1	PAHZZ	04713	MV1404H	SEMICONDUCTOR DEVIC	2
2	PAHZZ	81349	JANTX1N4454	SEMICONDUCTOR DEVIC	1
3	PAHZZ	81349	M39014/02-1417	CAPACITOR, FIXED, CER	2
4	PAHZZ	29990	ATC200B473KC50X	CAPACITOR, FIXED, CER	2
5	PAHZZ	29990	ATC200B223KC50X	CAPACITOR, FIXED, CER	1
6	PAHZZ	29990	ATC200B393KC50X	CAPACITOR, FIXED, CER	1
7	PAHZZ	29990	ATC200B822KC50X	CAPACITOR, FIXED	1
8	PAHZZ	29990	ATC700A102FC50X	CAPACITOR, FIXED, CER	3

9	PAHZZ	29990	ATC100A220JC50X	CAPACITOR, FIXED, CER	1
10	PAHZZ	29990	ATC100A240FC50X	CAPACITOR, FIXED, CER	1
11	PAHZZ	29990	ATC100A3R3D50X	CAPACITOR, FIXED, POR	1
12	PAHZZ	60935	402/1/57613/016	CAPACITOR, FIXED, ELE	1
13	PAHZZ	29990	ATC100A470JC50X	CAPACITOR, FIXED, CER	1
14	PAHZZ	29990	ATC700A331JC50X	CAPACITOR, FIXED, CER	1
15	PAHZZ	81349	M27/240-06	REACTOR	1
16	PAHZZ	96906	MS75083-13	COIL, RADIO FREQUENC	2
17	PAHZZ	80063	A3031506	TRANSFORMER ASSEMBL	1
18	PAHZZ	80063	A3031505	INDUCTOR ASSEMBLY	1
19	PAHZZ	04713	MMBFU310	TRANSISTOR	1
20	PAHZZ	81349	RCR05G622JS	RESISTOR, FIXED, COMP	2
21	PAHZZ	81349	RCR05G153JS	RESISTOR, FIXED, COMP	2
22	PAHZZ	81349	RCR05G151JS	RESISTOR, FIXED, COMP	1
23	PAHZZ	81349	RCR05G134JS	RESISTOR, FIXED, COMP	1
24	PAHZZ	81349	RCR05G510JS	RESISTOR, FIXED, COMP	1
25	PAHZZ	81349	RCR05G101JS	RESISTOR, FIXED, COMP	3
26	PAHZZ	81349	RCR05G241JS	RESISTOR, FIXED, COMP	2
27	PAHZZ	81349	RCR05G220JS	RESISTOR, FIXED, COMP	1
28	PAHZZ	81349	RCR05G750JS	RESISTOR, FIXED, COMP	1
29	PAHZZ	81349	JM38510/13101BPX	MICROCIRCUIT, LINEAR	1
30	PAHZZ	50021	DL233	DIVIDER, POWER, RADIO	1
31	XBHZZ	80063	A3031177	COVER, SHIELD-LOOP B	1
32	PAHZZ	80063	A3031189	SPACER	14
33	XBHZZ	80063	A3031176	FRAME, SHIELD-LOOP B	1
34	PAHZZ	80063	A3034571-2	LABEL, ELECTROSTATI	1
35	XBHZZ	80063	A3031038-208	LABEL	1
				END OF FIGURE	

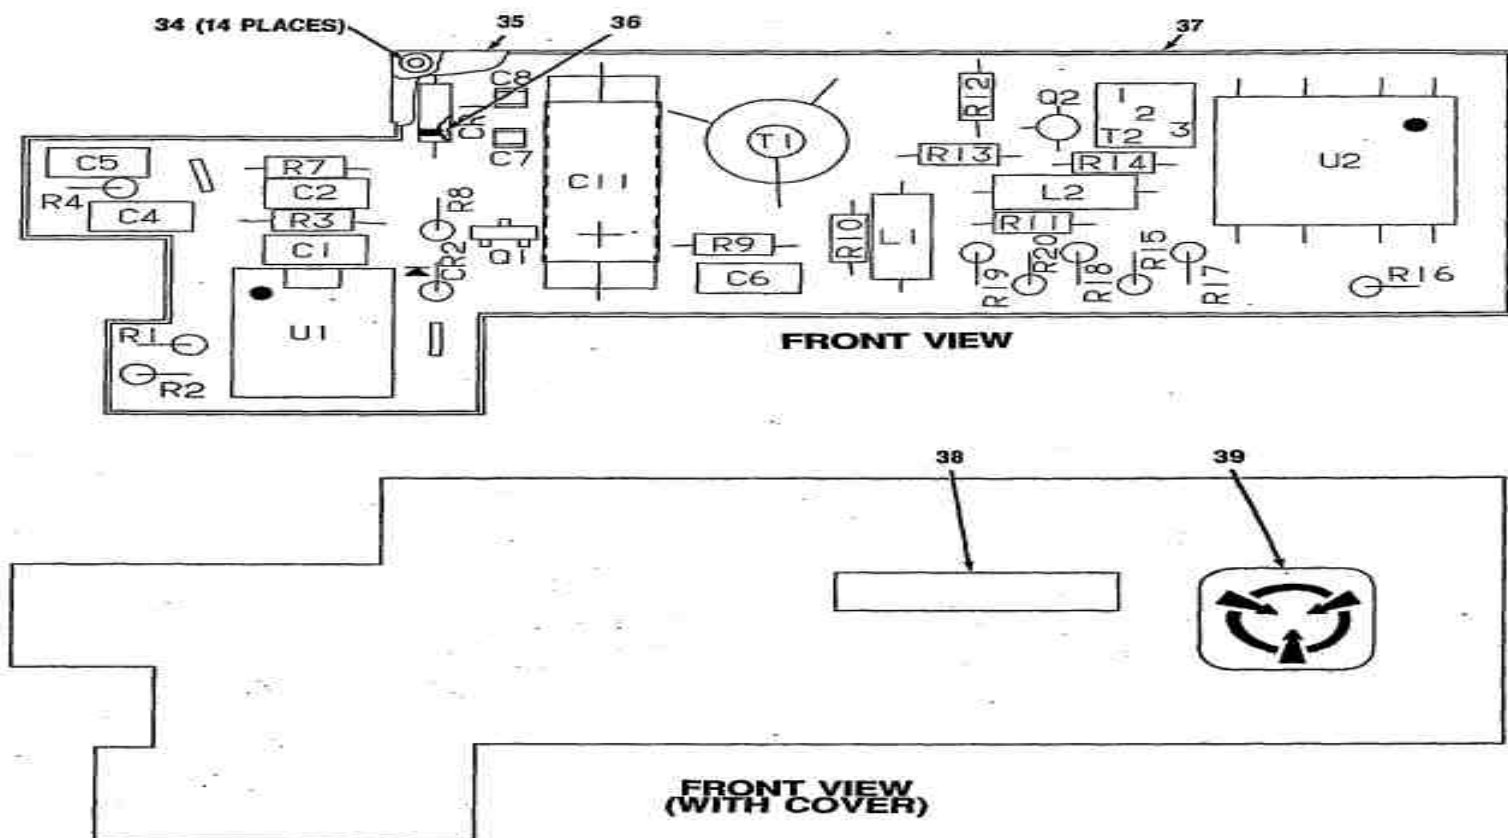

LEGEND

REF. DES.	ITEM NO.
CR1	1
CR2	2
C1	3
C2	4
C3	5
C4	3
C5	4
C6	6

REF. DES.	ITEM NO.
C7	7
C8	8
C9	9
C10	10
C11	11
C12	10
C13	10
C14	12

REF. DES.	ITEM NO.
C15	10
L1	13
L2	13
Q1	14
Q2	15
R1	16
R2	16
R3	17

REF. DES.	ITEM NO.
R4	17
R7	18
R8	19
R9	20
R10	21
R11	22
R12	23
R13	24

REF. DES.	ITEM NO.
R14	25
R15	26
R16	27
R17	26
R18	28
R19	29
R20	28
T1	30


REF. DES.	ITEM NO.
T2	31
U1	32
U2	33

CEONL-048

FIGURE 27 CCA (A3031170)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102030103 CCA (A3031170)	
				FIG.27	
1	PAHZZ	15238	BB221	SEMICONDUCTOR DEVIC	1
2	PAHZZ	81349	JANTX1N4454	SEMICONDUCTOR DEVIC E,DIODE	1
3	PAHZZ	81349	M39014/01-1593	CAPACITOR,FIXED,CER	2
4	PAHZZ	81349	M39014/01-1587	CAPACITOR,FIXED,CER	2
5	PAHZZ	29990	ATC100A470JC50X	CAPACITOR,FIXED,CER	1
6	PAHZZ	81349	M39014/01-1339	CAPACITOR,FIXED,CER	1
7	PAHZZ	29990	ATC100A5R1CC50X	CAPACITOR,FIXED,CER	1
8	PAHZZ	29990	ATC100A6R8CC50X	CAPACITOR,FIXED,CER	1

9	PAHZZ	29990	ATC100A150JC50X	CAPACITOR, FIXED, CER	1
10	PAHZZ	29990	ATC700A102FC50X	CAPACITOR, FIXED, CER	4
11	PAHZZ	60935	402/1/57613/016	CAPACITOR, FIXED, ELE	1
12	PAHZZ	29990	ATC200B104NC50X	CAPACITOR, FIXED, CER	1
13	PAHZZ	96906	MS75083-13	COIL, RADIO FREQUENC	2
14	PAHZZ	04713	MMBFU310	TRANSISTOR	1
15	PAHZZ	12436	V00691-001	TRANSISTOR	1
16	PAHZZ	81349	RCR05G102JS	RESISTOR, FIXED, COMP	2
17	PAHZZ	81349	RCR05G332JS	RESISTOR, FIXED, COMP	2
18	PAHZZ	81349	RCR05G103JS	RESISTOR, FIXED, COMP	1
19	PAHZZ	81349	RCR05G101JS	RESISTOR, FIXED, COMP	1
20	PAHZZ	81349	RCR05G220JS	RESISTOR, FIXED, COMP	1
21	PAHZZ	81349	RCR05G331JS	RESISTOR, FIXED, COMP	1
22	PAHZZ	81349	RCR05G270JS	RESISTOR, FIXED, COMP	1
23	PAHZZ	81349	RCR05G751JS	RESISTOR, FIXED, COMP	1
24	PAHZZ	81349	RCR05G203JS	RESISTOR, FIXED, COMP	1
25	PAHZZ	81349	RCR05G153JS	RESISTOR, FIXED, COMP	1
26	PAHZZ	81349	RCR05G151JS	RESISTOR, FIXED, COMP	2
27	PAHZZ	81349	RCR05G390JS	RESISTOR, FIXED, COMP	1
28	PAHZZ	81349	RCR05G301JS	RESISTOR, FIXED, COMP	2
29	PAHZZ	81349	RCR05G180JS	RESISTOR, FIXED, COMP	1
30	PAHZZ	80063	A3031504	TRANSFORMER ASSEMBL	1
31	PAHZZ	80063	A3030142	TRANSFORMER	1
32	PAHZZ	81349	JM38510/13101BPX	MICROCIRCUIT, LINEAR	1
33	PAHZZ	50021	DL233	DIVIDER, POWER, RADIO	1
34	PAHZZ	80063	A3031189	SPACER	14
35	XBHZZ	80063	A3031250	COVER	1
36	PAHZZ	80063	A3031182	INSULATOR	1
37	XBHZZ	80063	A3031180	FRAME, SHIELD-LOOP C	1
38	XBHZZ	80063	A3031038-209	LABEL	1
39	PAHZZ	80063	A3034571-2	LABEL, ELECTROSTATI	1
				END OF FIGURE	

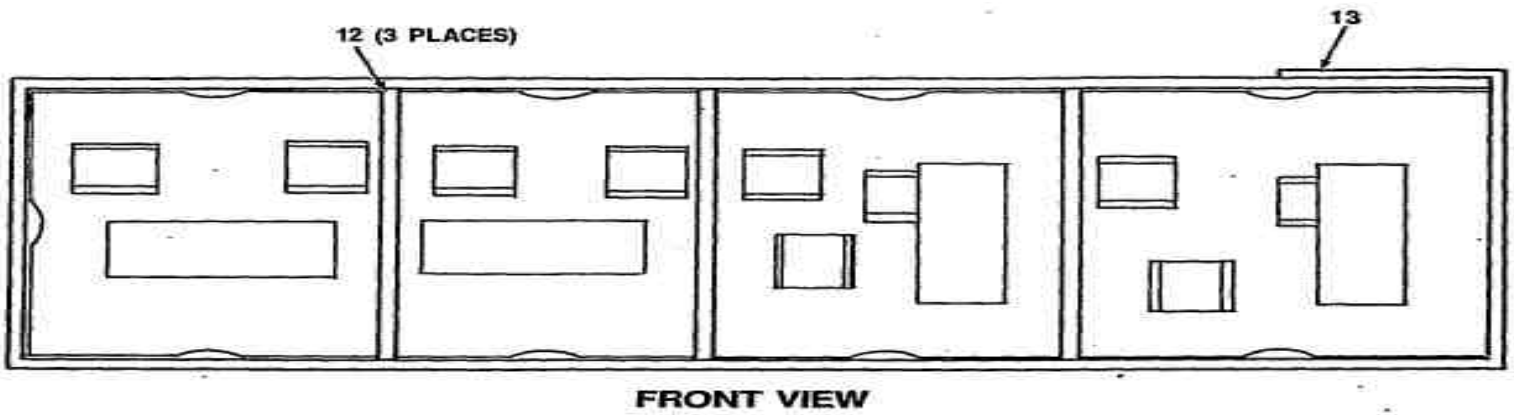

LEGEND


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C70	1	C78	5
C71	2	C79	7
C72	1	C80	8
C73	3	C81	9
C74	4	L11	10
C75	5	L12	11
C76	5	L13	11
C77	6	L14	11

CEONL-049

FIGURE 28 CCA (A3031184)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 0102030104 CCA (A3031184)	
				FIG.28	
1	PAHZZ	29990	ATC100A270JC50X	CAPACITOR, FIXED, CER	2
2	PAHZZ	29990	ATC100A200JC50X	CAPACITOR, FIXED, CER	1
3	PAHZZ	29990	ATC100A220JC50X	CAPACITOR, FIXED, CER	1
4	PAHZZ	29990	ATC100A6R8CC50X	CAPACITOR, FIXED, CER	1
5	PAHZZ	29990	ATC100A330JC50X	CAPACITOR, FIXED, CER	3
6	PAHZZ	29990	ATC100A8R2CC50X	CAPACITOR, FIXED, CER	1
7	PAHZZ	29990	ATC100A470JC50X	CAPACITOR, FIXED, CER	1
8	PAHZZ	29990	ATC100A3R9DC50X	CAPACITOR, FIXED, CER	1

9	PAHZZ	29990	ATC100A390JC50X	CAPACITOR, FIXED, POR	1
10	PAHZZ	80063	A3030910	INDUCTOR	1
11	PAHZZ	80063	A3030150	INDUCTOR	3
12	XBHZZ	80063	A3031186	SHIELD	3
13	XBHZZ	80063	A3031185	FRAME-FL3	1
END OF FIGURE					

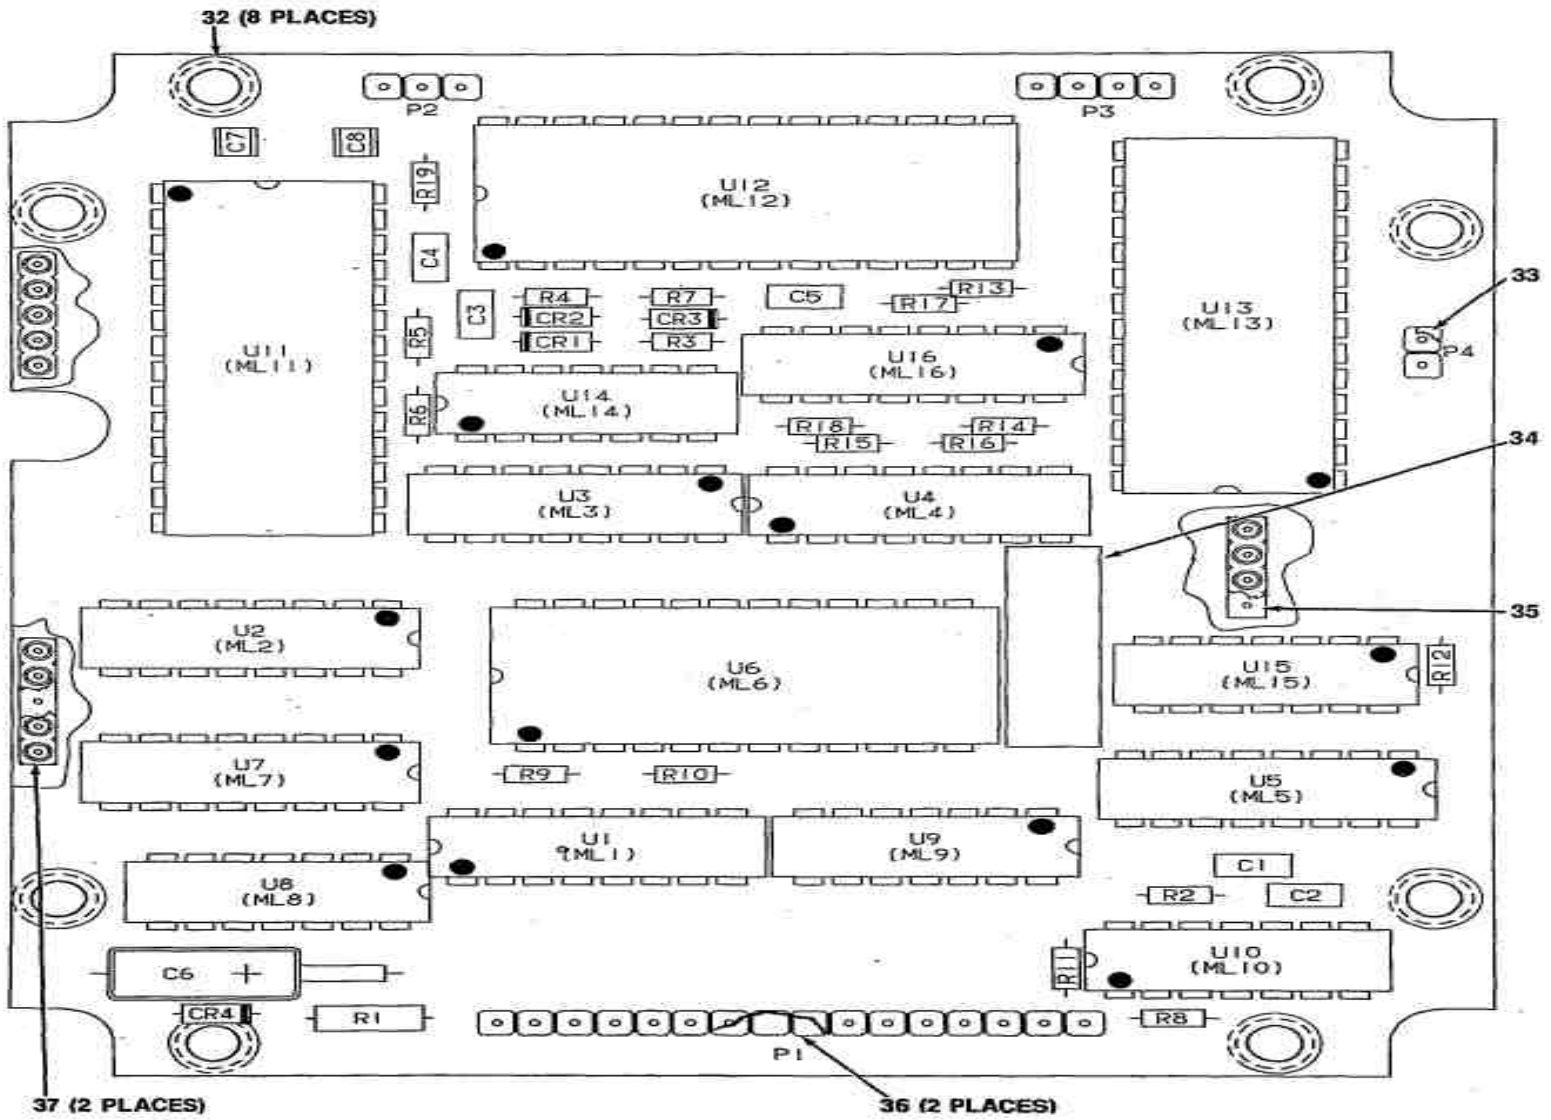

LEGEND


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	J3	8	R8	18	U4	23
CR2	1	J4	9	R9	18	U5	23
CR3	1	J5	10	R10	19	U6	24
CR4	1	J6	7	R11	19	U7	22
C1	2	P1	11	R12	20	U8	25
C2	3	P2	12	R13	21	U9	26
C3	4	P3	13	R14	21	U10	27
C4	4	P4	14	R15	21	U11	28
C5	4	R1	15	R16	21	U12	28
C6	5	R2	16	R17	21	U13	28
C7	6	R3	17	R18	21	U14	29
C8	6	R4	17	R19	18	U15	30
C9	6	R5	18	U1	22	U16	31
J1	7	R6	18	U2	23		
J2	8	R7	18	U3	23		

CEONL-051

FIGURE 29 Data Receiver and Logic CCA (A3027687)

(1)	(2)	(3)	(4)	C5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020302 DATA RECEIVER AND LOGIC CCA (A3027687)	
				FIG.29	
1	PAHZZ	81349	JANTX1N4454	SEMICONDUCTOR DEVIC	4
2	PAHZZ	81349	M39014/01-1593	CAPACITOR, FIXED, CER	1
3	PAHZZ	81349	M39014/01-1489	CAPACITOR, FIXED, CER	1
4	PAHZZ	81349	M39014/01-1575	CAPACITOR, FIXED, CER	3
5	PAHZZ	60935	402/1/57612/019	CAPACITOR, FIXED, TAN	1
6	PAHZZ	29990	ATC200B104NC50X	CAPACITOR, FIXED, CER	3
7	PAHZZ	F7303	3410799114400	CONNECTOR, PLUG, ELEC	2

8	PAHZZ	F7303	3410799105400	CONNECTOR,PLUG,ELEC	2
9	PAHZZ	F7303	3410799104400	CONNECTOR,PLUG,ELEC	1
10	PAHZZ	F7303	3410799102400	CONNECTOR,PLUG,ELEC	1
11	PAHZZ	F7303	3310416116500	CONNECTOR,PRINTED C	1
12	PAHZZ	82796	3310416103500	CONNECTOR,PLUG,ELEC	1
13	PAHZZ	F7303	3310416104500	CONNECTOR,PRINTED C	1
14	PAHZZ	F7303	3310416102500	CONNECTOR,PRINTED C	1
15	PAHZZ	81349	RCR07G150JS	RESISTOR,FIXED,COMP	1
16	PAHZZ	81349	RCR056104JS	RESISTOR,FIXED,COMP	1
17	PAHZZ	81349	RCR05G154JS	RESISTOR,FIXED,COMP	2
18	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	6
19	PAHZZ	81349	RCR05G101JS	RESISTOR,FIXED,COMP	2
20	PAHZZ	81349	RCR05G100JS	RESISTOR,FIXED,COMP	1
21	PAHZZ	81349	RCR05G473JS	RESISTOR,FIXED,COMP	6
22	PAHZZ	02735	CD4015BF/3	MICROCIRCUIT,DIGITA	2
23	PAHZZ	14933	7702501EB	MICROCIRCUIT,DIGITA	4
24	PAHZZ	18714	CD4508BF/3	MICROCIRCUIT,DIGITA	1
25	PAHZZ	31019	883C4068BC	MICROCIRCUIT,DIGITA	1
26	PAHZZ	14933	7704401CX	MICROCIRCUIT,DIGITA	1
27	PAHZZ	81349	M38510/05252BCB	MICROCIRCUIT,DIGITA	1
28	PAHZZ	04713	MC145152L1D	MICROCIRCUIT,DIGITA	3
29	PAHZZ	81349	M38510/05051BCB	MICROCIRCUIT,DIGITA	1
30	PAHZZ	81349	M38510/00803BCB	MICROCIRCUIT,DIGITA	1
31	PAHZZ	81349	M38510/05554BEX	MICROCIRCUIT,DIGITA	1
32	XBHZZ	80063	A3027699	BUSHING	8
33	XBHZZ	80063	A3031164-1	SHIM	1
34	XBHZZ	80063	A3031038-19	LABEL	1
35	XBHZZ	80063	A3031164-2	SHIM	1
36	XBHZZ	80063	A3031164-4	SHIM	2
37	XBHZZ	80063	A3031164-3	SHIM	2
				END OF FIGURE	

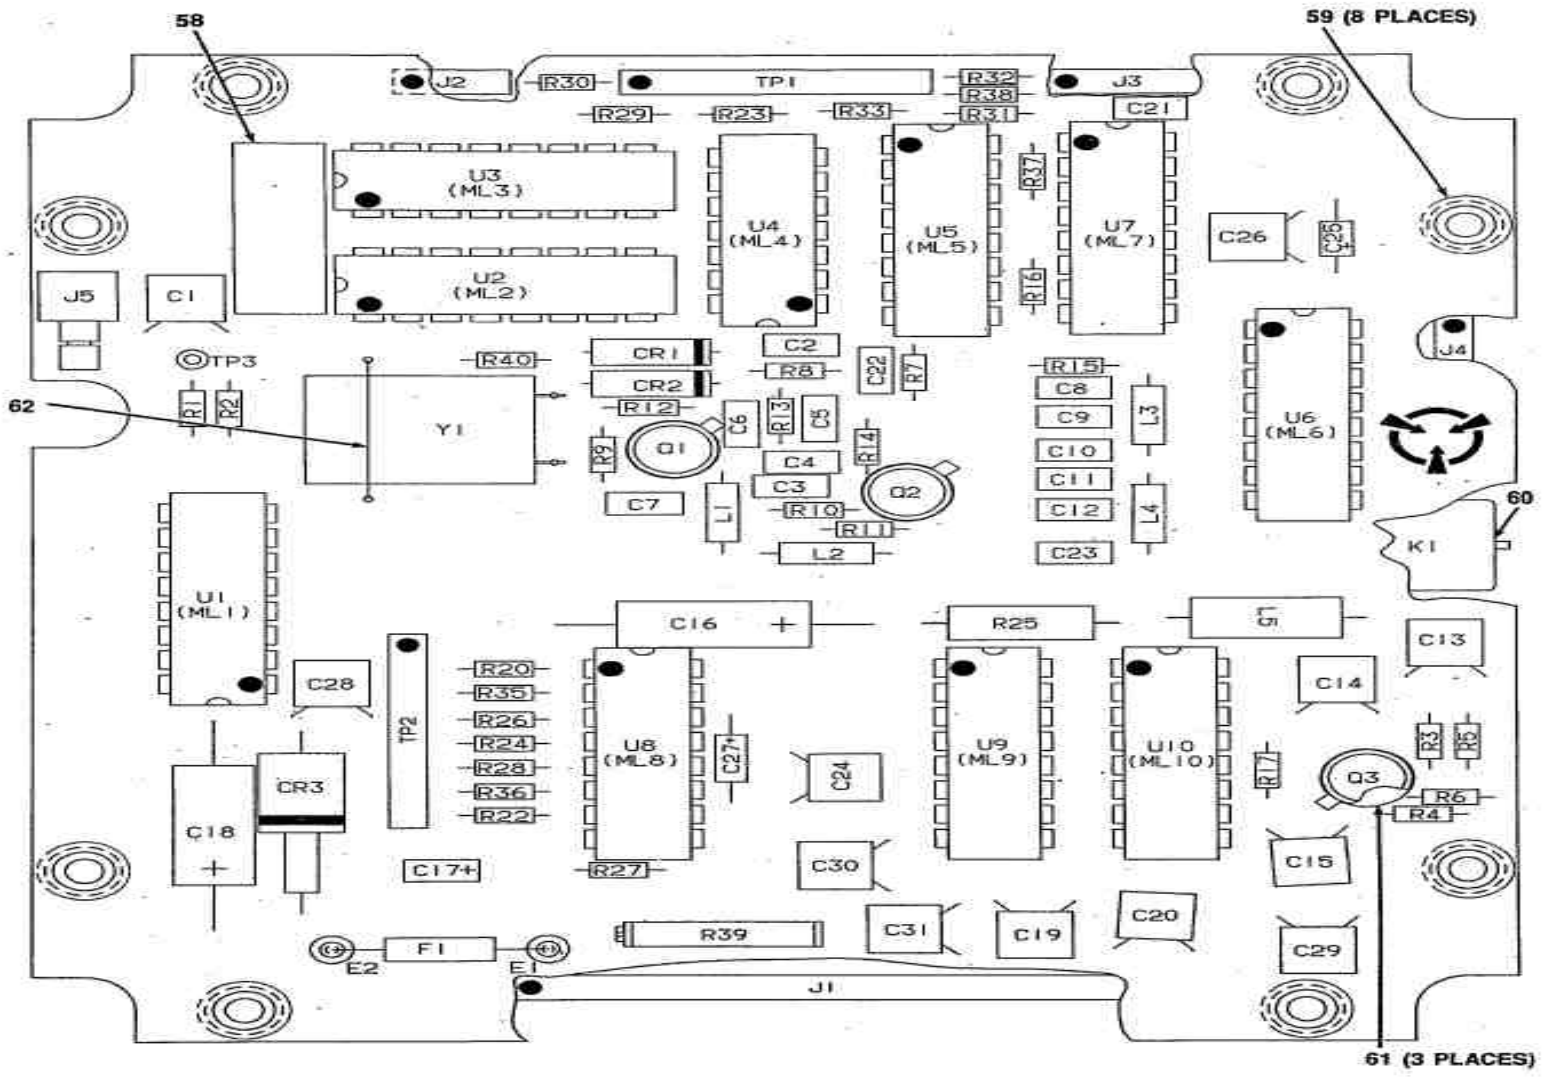

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C24	7	R2	33	R31	34
CR2	1	C25	13	R3	34	R32	34
CR3	2	C26	7	R4	35	R33	34
C1	3	C27	14	R5	36	R35	34
C2	4	C28	7	R6	37	R36	34
C3	4	C29	15	R7	38	R37	44
C4	5	C30	16	R8	38	R38	34
C5	5	C31	17	R9	39	R39	49
C6	6	E1	18	R10	40	R40	38
C7	7	E2	18	R11	41	TP1	50
C8	8	F1	19	R12	36	TP2	50
C9	9	J1	20	R13	42	TP3	51
C10	4	J2	21	R14	43	U1	52
C11	10	J3	22	R15	44	U2	53
C12	8	J4	23	R16	45	U3	53
C13	4	J5	24	R17	46	U4	54
C14	7	K1	25	R20	34	U5	53
C15	4	L1	26	R22	34	U6	53
C16	11	L2	27	R23	34	U7	55
C17	12	L3	27	R24	34	U8	56
C18	11	L4	28	R25	47	U9	53
C19	4	L5	29	R26	34	U10	52
C20	4	Q1	30	R27	48	Y1	57
C21	4	Q2	30	R28	34		
C22	3	Q3	31	R29	34		
C23	7	R1	32	R30	34		


CECNL-053

FIGURE 30 Std. Freq. Module CCA. (A3027688)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020303 STD. FREQUENCY MODULE CCA (A3027688)	
				FIG.30	
1	PAH2Z	04713	MV1404H	SEMICONDUCTOR DEVIC	2
2	PAHZZ	81349	JANTX1N5907	SEMICONDUCTOR DEVIC	1
3	PAHZZ	81349	M39014/01-1357	CAPACITOR, FIXED, CER	2
4	PAHZZ	81349	M39014/01-1575	CAPACITOR, FIXED, CER	8
5	PAHZZ	81349	M39014/01-1348	CAPACITOR, FIXED, CER	2
6	PAHZZ	81349	M39014/01-1339	CAPACITOR, FIXED, CER	1
7	PAHZZ	81349	M39014/01-1593	CAPACITOR, FIXED, CER	6

8	PAHZZ	81349	M39014/01-1578	CAPACITOR, FIXED, CER	2
9	PAHZZ	81349	M39014/01-1351	CAPACITOR, FIXED, CER	1
10	PAHZZ	81349	N39104/01-1279	CAPACITOR, FIXED	1
11	PAHZZ	60935	402/1/57612/019	CAPACITOR, FIXED, TAN	2
12	PAHZZ	31433	T370B224M035AS	CAPACITOR, FIXED, TAN	1
13	PAHZZ	31433	MC752387-5	CAPACITOR, FIXED, ELE	1
14	PAHZZ	31433	T372C475M020AS	CAPACITOR, FIXED, ELE	1
15	PAHZZ	29990	ATC700A121JC50X	CAPACITOR, FIXED, CER	1
16	PAHZZ	81349	M39014/01-1354	CAPACITOR, FIXED, CER	1
17	PAHZZ	81349	M39014/01-1562	CAPACITOR, FIXED, CER	1
18	PAHZZ	80063	A3026935	TERMINAL	2
19	PAHZZ	75915	255001	FUSE, CARTRIDGE	1
20	PAHZZ	F7303	3410799116400	CONNECTOR, PRINTED, C	1
21	PAHZZ	F7303	3410799103400	CONNECTOR, PRINTED C	1
22	PAHZZ	F7303	3410799104400	CONNECTOR, PLUG, ELEC	1
23	PAHZZ	F7303	3410799102400	CONNECTOR, PLUG, ELEC	1
24	PAHZZ	07187	4022893-001	CONNECTOR, RECEPTACL	1
25	PAHZZ	81349	M39016/19-042L	RELAY, ELECTROMAGNET	1
26	PAHZZ	96906	MS75084-12	COIL, RADIO FREQUENC	1
27	PAHZZ	96906	MS75084-16	COIL, RADIO FREQUENC	2
28	PAHZZ	96906	MS75084-15	COIL, RADIO FREQUENC	1
29	PAHZZ	96906	MS14046-4	COIL, RADIO FREQUENC	1
30	PAHZZ	81349	JAN2N918	TRANSISTOR	2
31	PAHZZ	81349	JAN2N2222A	TRANSISTOR	1
32	PAHZZ	81349	RCR05G510JS	RESISTOR, FIXED, COMP	1
33	PAHZZ	81349	RCR05G514JS	RESISTOR, FIXED, COMP	1
34	PAHZZ	81349	RCR05G302JS	RESISTOR, FIXED, COMP	15
35	PAHZZ	81349	RCR05G181JS	RESISTOR, FIXED, COMP	1
36	PAHZZ	81349	RCR05G123JS	RESISTOR, FIXED, COMP	2
37	PAHZZ	81349	RCR05G222JS	RESISTOR, FIXED, COMP	1
38	PAHZZ	81349	RCR05G104JS	RESISTOR, FIXED, COMP	3
39	PAHZZ	81349	RCR05G223JS	RESISTOR, FIXED, COMP	1
40	PAHZZ	81349	RCR05G332JS	RESISTOR, FIXED, COMP	1
41	PAHZZ	81349	RCR05G152JS	RESISTOR, FIXED, COMP	1
42	PAHZZ	81349	RCR05G561JS	RESISTOR, FIXED, COMP	1
43	PAHZZ	81349	RCR05G202JS	RESISTOR, FIXED, COMP	1
44	PAHZZ	81349	RCR05G102JS	RESISTOR, FIXED, COMP	2
45	PAHZZ	81349	RCR05G512JS	RESISTOR, FIXED, COMP	1

46	PAHZZ	81349	RCR05G205JS	RESISTOR, FIXED, COMP	1
47	PAHZZ	81349	RCR20G2R7JS	RESISTOR, FIXED, COMP	1
48	PAHZZ	81349	RCR05G752JS	RESISTOR, FIXED, COMP	1
49	PAHZZ	32997	3082P-45-104	RESISTOR, VARIABLE, N	1
50	PAHZZ	F7303	3410799108400	CONNECTOR, PLUG, ELEC	2
51	PAHZZ	98291	FTMM16L2RED	TERMINAL, FEEDTHRU	1
52	PAHZZ	27014	MM54HC4049J	MICROCIRCUIT, DIGITA	2
53	PAHZZ	12040	MM54HC390J	MICROCIRCUIT, DIGITA	5
54	PAHZZ	81349	M38510/65003BCA	MICROCIRCUIT, DIGITA	1
55	PAHZZ	27014	CD4046BIU-MIL	MICROCIRCUIT, DIGITA	1
56	PAHZZ	81349	JM38510/05652BEX	MICROCIRCUIT, DIGITA	1
57	PAHZZ	A3036	U-58397.000011R	CRYSTAL UNIT, QUARTZ	1
58	XBHZZ	80063	A3031038-21	LABEL	1
59	PAHZZ	80063	A3027783	BUSHING	8
60	PAHZZ	80063	A3031242	RELAY, PAD	1
61	PAHZZ	13103	445214-102	INSULATOR--TRANSIST	3
62	XBHZZ	80063	A3031241	SHIELD	1
				END OF FIGURE	

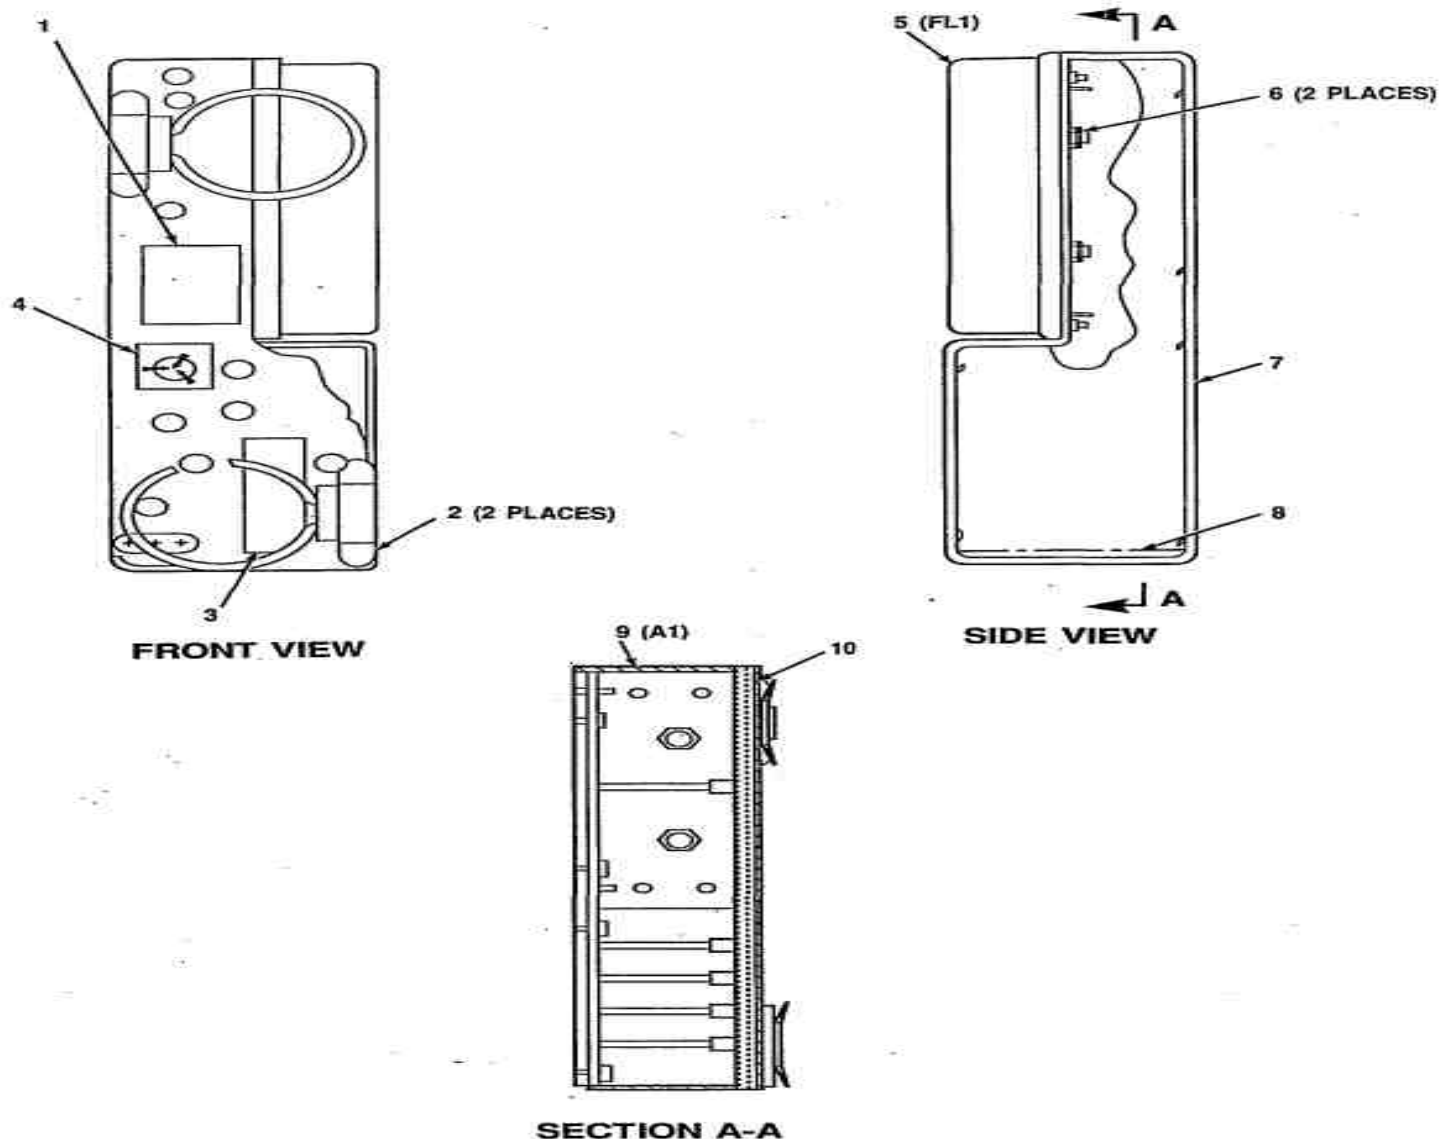


CEONL-654

FIGURE 31 RF Translator Assy A1A2A2 (A3026004)


(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 010204 RF TRANSLATOR ASSEMBLY A1A2A2 (A3026004)	
				FIG.31	
1	XBHZZ	80063	A3027889	COVER,TERMINAL BOAR	1
2	PAHZZ	80063	A3027859	HANDLE,BAIL	2
3	XBHZZ	80063	A3031038-192	LABEL	1
4	XBHZZ	80063	A3034571-2	LABEL, ELECTROSTATI	1
5	PAHZZ	80063	A3030228	FILTER, BANDPASS--CR	1
6	XBHZZ	A3026	3-10311-001	WASHER,LOCK	2
7	XBHZZ	80063	A3027852	TRANSLATOR ENCLOSUR	1

8	XBHZZ	80063	A3031416	GUARD	1
9	PBHLA	80063	A3027673	CIRCUIT CARD ASSEMB (SEE FIG. 32	1
				FOR BREAKDOWN)	
10	PCHZZ	80063	A3027874	GASKET	1
				END OF FIGURE	

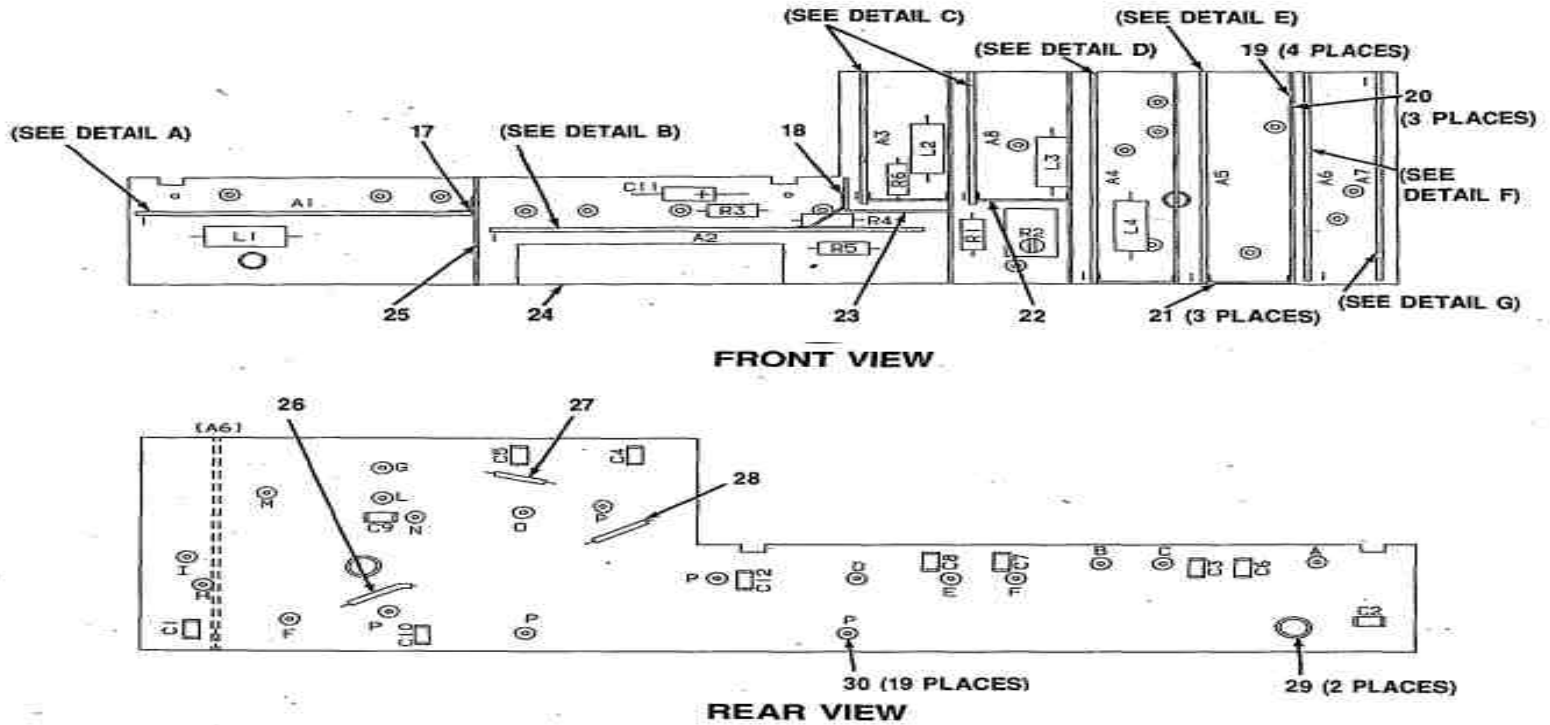

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
A1	1	C2	8	C11	9	R4	14
A2	2	C3	8	C12	8	R5	15
A3	3	C4	8	L1	10	R6	16
A4	4	C5	8	L2	10		
A5	5	C6	8	L3	10		
A6	6	C7	8	L4	10		
A7	7	C8	8	R1	11		
A8	3	C9	8	R2	12		
C1	8	C10	8	R3	13		

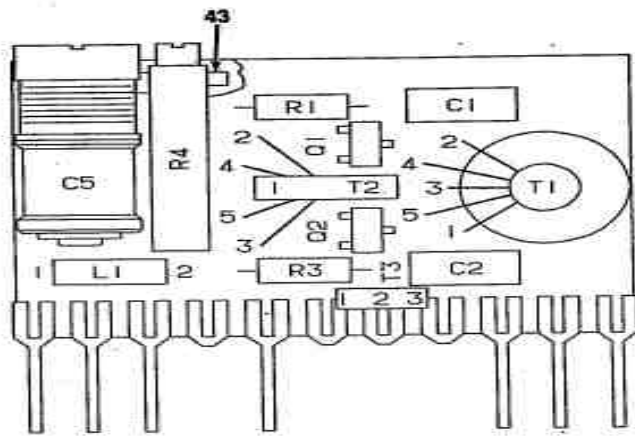


DETAIL A

LEGEND

REF. DES.	ITEM NO.
C1	31
C2	31
C3	32
C4	33
C5	34
L1	35
P1	36
P2	36
P3	36
P5	36
P9	36

REF. DES.	ITEM NO.
P10	36
P11	36
Q1	37
Q2	37
R1	38
R3	38
R4	39
T1	40
T2	41
T3	42

NOTE: Prefix all Reference Designators with A2A2A1A1.

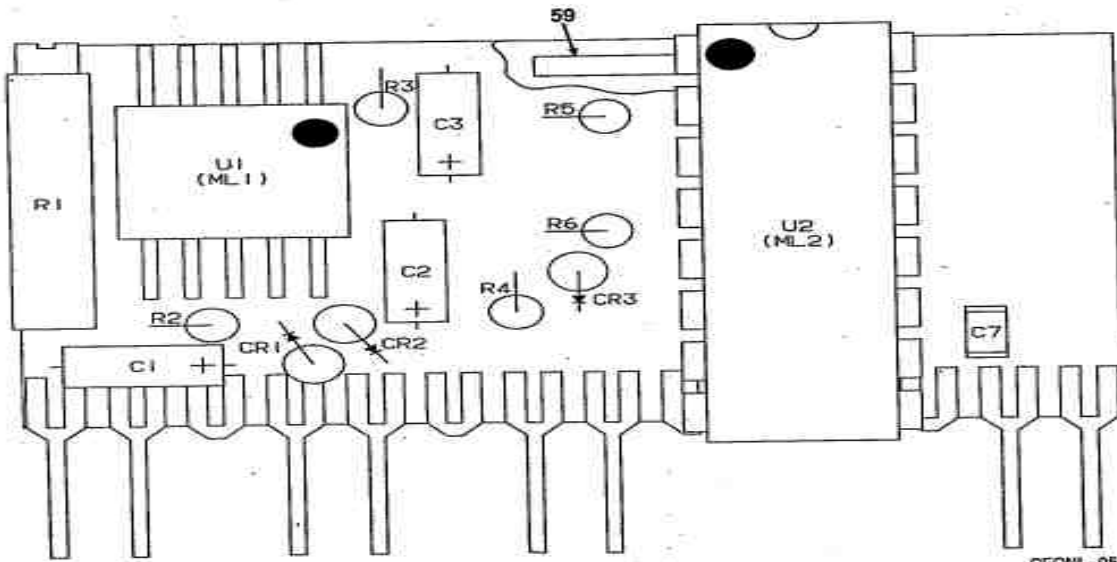


DETAIL B

LEGEND

REF. DES.	ITEM NO.
CR1	44
CR2	44
CR3	45
C1	46
C2	46
C3	47
C4	48
C5	48
C6	48
C7	48
C8	48
C9	48
C10	48
C11	48
C12	49
P1	50
P2	50
P4	50
P5	50
P7	50
P8	50
P13	50
P14	50
R1	51
R2	52
R3	53
R4	54
R5	55
R6	56
U1	57
U2	58

NOTE: Prefix all Reference Designators with A2A2A1A2.


GEONL-056

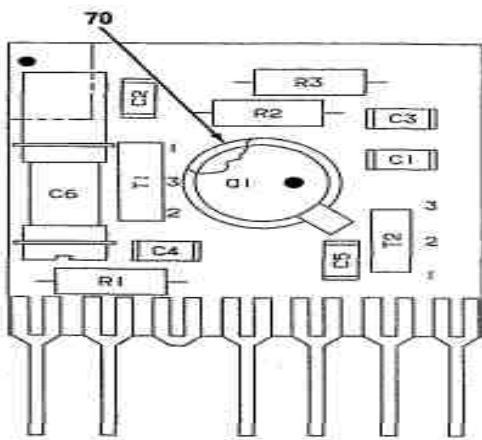

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C1	60	P5	63
C2	60	P6	63
C3	60	P7	63
C4	60	Q1	64
C5	60	R1	65
C6	61	R2	66
C7	62	R3	67
P1	63	T1	68
P2	63	T2	69
P4	63		


NOTE: Prefix all Reference Designators with A2A2A1A3,A8

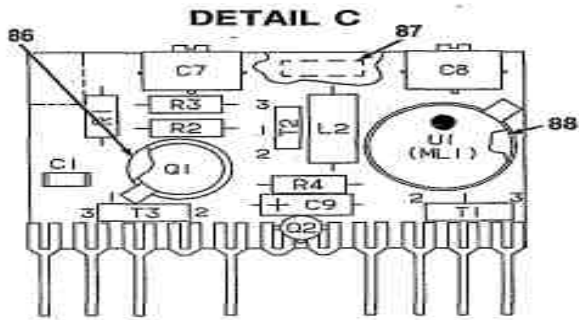

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C1	71	L2	74	Q2	77
C2	71	P1	75	R1	78
C3	71	P2	75	R2	79
C4	71	P3	75	R3	80
C5	71	P5	75	R4	81
C6	71	P8	75	T1	82
C7	72	P9	75	T2	83
C8	72	P10	75	T3	84
C9	73	P11	75	U1	85
C10	71	Q1	76		

NOTE: Prefix all Reference Designators with A2A2A1A4

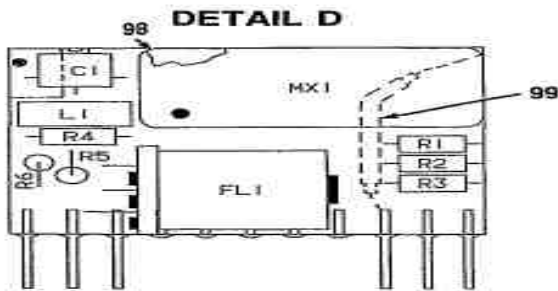


LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C1	89	P10	93
FL1	90	P11	93
L1	91	R1	94
MX1	92	R2	95
P1	93	R3	94
P2	93	R4	96
P3	93	R5	97
P9	93	R6	96

NOTE: Prefix all Reference Designators with A2A2A1A5

DETAIL E

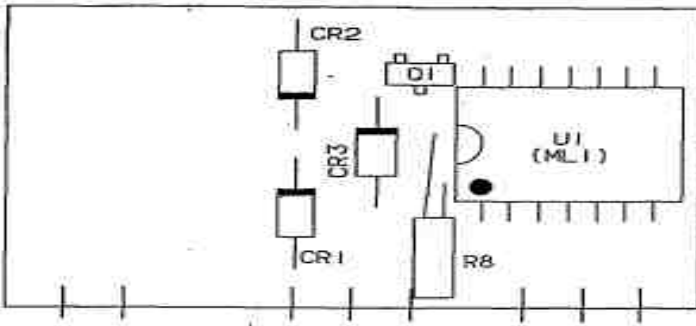


DETAIL F

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	100	P7	101
CR2	100	P9	101
CR3	100	P10	101
P1	101	P11	101
P2	101	Q1	102
P5	101	R8	103
P6	101	U1	104

NOTE: Prefix all Reference Designators with A2A2A1A6

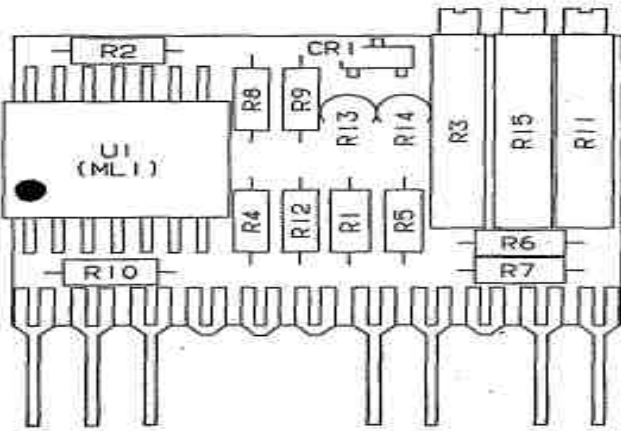

DETAIL G

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	105	R5	111
P1	106	R6	112
P2	106	R7	112
P3	106	R8	112
P7	106	R9	112
P8	106	R10	111
P10	106	R11	113
P11	106	R12	114
R1	107	R13	115
R2	108	R14	115
R3	109	R15	109
R4	110	U1	116

NOTE: Prefix all Reference Designators with A2A2A1A7

GEONL-058


FIGURE 32 CCA (A3027673)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020401 CCA (A3027673)	
				FIG.32	
1	PBHLL	80063	A3027662	CIRCUIT CARD ASSEMB	1
2	PBHLL	80063	A3027664	CIRCUIT CARD ASSEMB	1
3	PBHLL	80063	A3027666	CIRCUIT CARD ASSEMB	2
4	PBHLL	80063	A3027667	CIRCUIT CARD ASSEMB	1
5	PBHLL	80063	A3027663	CIRCUIT CARD ASSEMB	1
6	PBHLLA	80063	A3027680	CIRCUIT CARD ASSEMB	1
7	PBHLLA	80063	A3027665	CIRCUIT CARD ASSEMB	1
8	PAHZZ	29990	ATC700A102KC50X	CAPACITOR, FIXED, CER	11


9	PAHZZ	17554	MPZ-010-105A-40	CAPACITOR, FIXED, CER	1
10	PAHZZ	96906	MS75084-3	COIL, RADIO FREQUENC	4
11	PAHZZ	81349	RCR05G512JS	RESISTOR, FIXED, COMP	1
12	PAHZZ	81349	RJR26FW502R	RESISTOR, VARIABLE, N	1
13	PAHZZ	81349	RCR05G510JS	RESISTOR, FIXED, COMP	1
14	PAHZZ	81349	RCR05G431JS	RESISTOR, FIXED, COMP	1
15	PAHZZ	81349	RCR05G221JS	RESISTOR, FIXED, COMP	1
16	PAHZZ	81349	RCR05G103JS	RESISTOR, FIXED, COMP	1
17	PAHZZ	80063	A3031293	CONTACT	1
18	PAHZZ	80063	A3031294	CONTACT	1
19	XBHZZ	80063	A3027768	SHIELD, TERMINAL BOA	4
20	XBHZZ	80063	A3031416	GUARD	3
21	PAHZZ	80063	A3031291	CONTACT	3
22	PAHZZ	80063	A3031292	CONTACT	1
23	XBHZZ	80063	A3027770	BRACKET, ANGLE	1
24	XBHZZ	80063	A3031038-194	LABEL	1
25	XBHZZ	80063	A3027769	SHIELD, TERMINAL BOA	1
26	XBHZZ	80063	A3030708-16	CABLE	1
27	XBHZZ	80063	A3030708-15	CABLE	1
28	XBHZZ	80063	A3030708-17	CABLE	1
29	XBHZZ	80063	A3027784	BUSHING	2
30	PAHZZ	06776	050-1627	PLUG, TIP	19
31	PAHZZ	81349	M39014/01-1593	CAPACITOR, FIXED, CER	2
32	PAHZZ	16546	C102K1005XFPB	CAPACITOR, FIXED, CER	1
33	PAHZZ	16546	C479J1005CFPB	CAPACITOR, FIXED, CER	1
34	PAHZZ	81349	PC26J060	CAPACITOR, VARIABLE,	1
35	PAHZZ	80063	A3030127	TRANSFORMER ASSEMBL	1
36	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	7
37	PAHZZ	04713	MMBFU310	TRANSISTOR	2
38	PAHZZ	81349	RCR05G301JS	RESISTOR, FIXED, COMP	2
39	PAHZZ	32997	3082P-45-102	RESISTOR, VARIABLE, N	1
40	PAHZZ	80063	A3030105	TRANSFORMER ASSEMBL	1
41	PAHZZ	80063	A3030106	TRANSFORMER ASSEMBL	1
42	PAHZZ	80063	A3030107	TRANSFORMER ASSEMBL	1
43	XBHZZ	80063	A3031466-11	LABEL	1
44	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	2
45	PAHZZ	28480	1N5711	SEMICONDUCTOR DEVIC	1
46	PAHZZ	17554	MZB-020-105A-20	CAPACITOR, FIXED, CER	2

47	PAHZZ	17554	MZB-010-225A-20	CAPACITOR,FIXED,CER	1
48	PAHZZ	29990	ATC700A102KC50X	CAPACITOR,FIXED,CER	8
49	PAHZZ	16546	C103K1005XHPB	CAPACITOR,FIXED,CER	1
50	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	8
51	PAHZZ	32997	3082P-45-503	RESISTOR,VARIABLE,N	1
52	PAHZZ	81349	RCR05G104JS	RESISTOR,FIXED,COMP	1
53	PAHZZ	81349	RCR05G562JS	RESISTOR,FIXED,COMP	1
54	PAHZZ	81349	RCR05G514JS	RESISTOR,FIXED,COMP	1
55	PAHZZ	81349	RCR05G301JS	RESISTOR,FIXED,COMP	1
56	PAHZZ	81349	RCR05G751JS	RESISTOR,FIXED,COMP	1
57	PAHZZ	81349	M38510/10101BHB	MICROCIRCUIT,LINEAR	1
58	PAHZZ	52648	SL550G	MICROCIRCUIT	1
59	XBHZZ	80063	A3031466-17	LABEL	1
60	PAHZZ	29990	ATC700A102KC50X	CAPACITOR,FIXED,CER	5
61	PAHZZ	F2220	37291	CAPACITOR,VARIABLE	1
62	PAHZZ	16546	C479J1005CFPB	CAPACITOR,FIXED,CER	1
63	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	6
64	PAHZZ	13499	352-0997-012	TRANSISTOR	1
65	PAHZZ	81349	RCR05G391JS	RESISTOR,FIXED,COMP	1
66	PAHZZ	81349	RCR05G474JS	RESISTOR,FIXED,COMP	1
67	PAHZZ	81349	RCR05G244JS	RESISTOR,FIXED,COMP	1
68	PAHZZ	80063	A3030108	TRANSFORMER ASSEMBL	1
69	PAHZZ	80063	A3030109	TRANSFORMER ASSEMBL	1
70	PAHZZ	13103	445214-102	INSULATOR--TRANSIST	1
71	PAHZZ	29990	ATC700A102KC50X	CAPACITOR,FIXED,CER	7
72	XBHZZ	81349	CV36A250	CAPACITOR,VARIABLE,	2
73	PAHZZ	17554	MZB-010-225A-20	CAPACITOR,FIXED,CER	1
74	PAHZZ	96906	MS75084-3	COIL,RADIO FREQUENC	1
75	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	8
76	PAHZZ	13499	352-0997-012	TRANSISTOR	1
77	PAHZZ	05869	750511-1	TRANSISTOR	1
78	PAHZZ	81349	RCR05G391JS	RESISTOR,FIXED,COMP	1
79	PAHZZ	81349	RCR05G244JS	RESISTOR,FIXED,COMP	1
80	PAHZZ	81349	RCR05G124JS	RESISTOR,FIXED,COMP	1
81	PAHZZ	81349	RCR05G512JS	RESISTOR,FIXED,COMP	1
82	PAHZZ	80063	A3030110	TRANSFORMER	1
83	PAHZZ	80063	A3031086	TRANSFORMER	1
84	PAHZZ	80063	A3030128	TRANSFORMER	1

85	PAHZZ	80063	A3031083	MICROCIRCUIT,LINER	1
86	PAHZZ	13103	445214-102	INSULATOR--TRANSIST	1
87	XBHZZ	80063	A3031466-12	LABEL	1
88	XBHZZ	80063	A3031584	INSULATOR,TRANSISTO	1
89	PAHZZ	80063	CV36A090	CAPACITOR	1
90	PAHZZ	81349	CV36A090	FILTER,BANDPASS	1
91	PAHZZ	80063	A3030129	TRANSFORMER	1
92	PAHZZ	15542	TAK-390125	MIXER,RADIO FREQUEN	1
93	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	6
94	PAHZZ	81349	RCR05G101JS	RESISTOR,FIXED,COMP	2
95	PAHZZ	81349	RCR05G620JS	RESISTOR,FIXED,COMP	1
96	PAHZZ	81349	RCR05G301JS	RESISTOR,FIXED,COMP	2
97	PAHZZ	81349	RCR05G180JS	RESISTOR,FIXED,COMP	1
98	PAHZZ	80063	A3031563	PAD,INSULATING	1
99	PAHZZ	80063	A3030708-4	CABLE	1
100	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	3
101	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	8
102	PAHZZ	89536	483743	TRANSISTOR	1
103	PAHZZ	56845	1C5001-A3	RESISTOR,THERMAL	1
104	PAHZZ	18714	CD4016BK	MICROCIRCUIT,LINER	1
105	PAHZZ	04713	BAV99	SEMICONDUCTOR DEVIC	1
106	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	9
107	PAHZZ	81349	RCR05G433JS	RESISTOR,FIXED,COMP	1
108	PAHZZ	81349	RCR05G241JS	RESISTOR,FIXED,COMP	1
109	PAHZZ	32997	3082P-45-203	RESISTOR,VARIABLE,N	2
110	PAHZZ	81349	RCR05G473JS	RESISTOR,FIXED,COMP	1
111	PAHZZ	81349	RCR05G203JS	RESISTOR,FIXED,COMP	2
112	PAHZZ	81349	RCR05G513J5	RESISTOR,FIXED,COMP	4
113	PAHZZ	32997	3082P-45-103	RESISTOR,VARIABLE,N	1
114	PAHZZ	81349	RCR05G393JS	RESISTOR,FIXED,COMP	1
115	PAHZZ	56845	7C1003-A3	RESISTOR,THERMAL	2
116	XBHZZ	07263	4066BFMQB	MICROCIRCUIT,DIGITA	1
				END OF FIGURE	

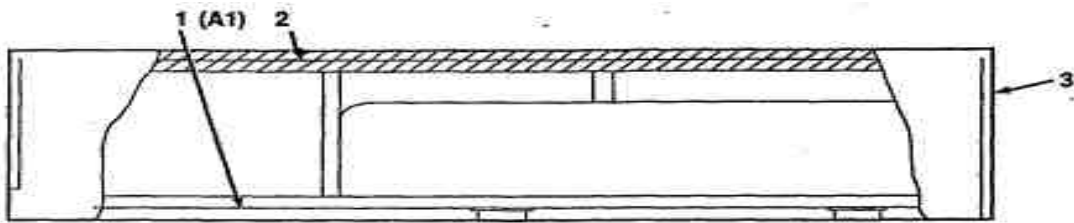

SIDE VIEW

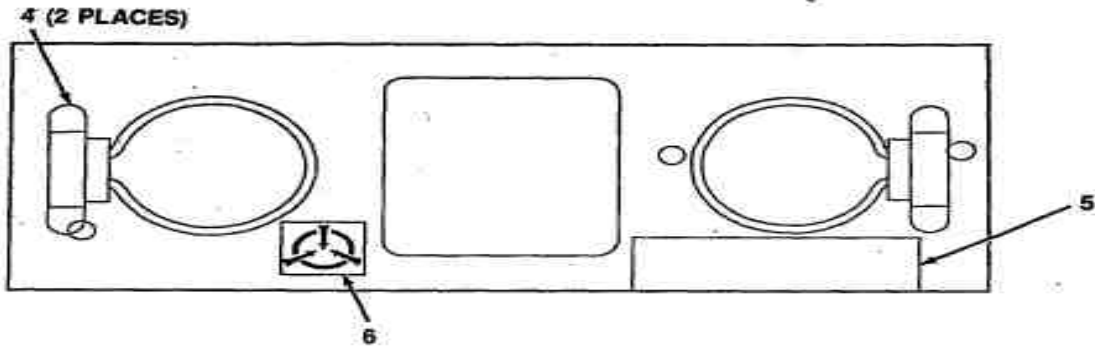


**TOP VIEW
(ROTATED 180°)**


CEONL-059

FIGURE 33 Audio Assembly A1A2A4 (A3026005)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 010205 AUDIO ASSEMBLY A1A2A4 (A3026005)	
				FIG.33	
1	PBHLA	80063	A3027350	CIRCUIT CARD ASSEMB (SEE FIG. 34 FOR BREAKDOWN)	1
2	PCHZZ	80063	A3027361	GASKET	1
3	XBHZZ	80063	A3027360	CONTAINER	1
4	PAHZZ	80063	A3027859	HANDLE,BAIL	2
5	XBHZZ	80063	A3031038-191	LABEL	1
6	XBHZZ	80063	A3034571-2	LABEL,ELECTROSTATI	1

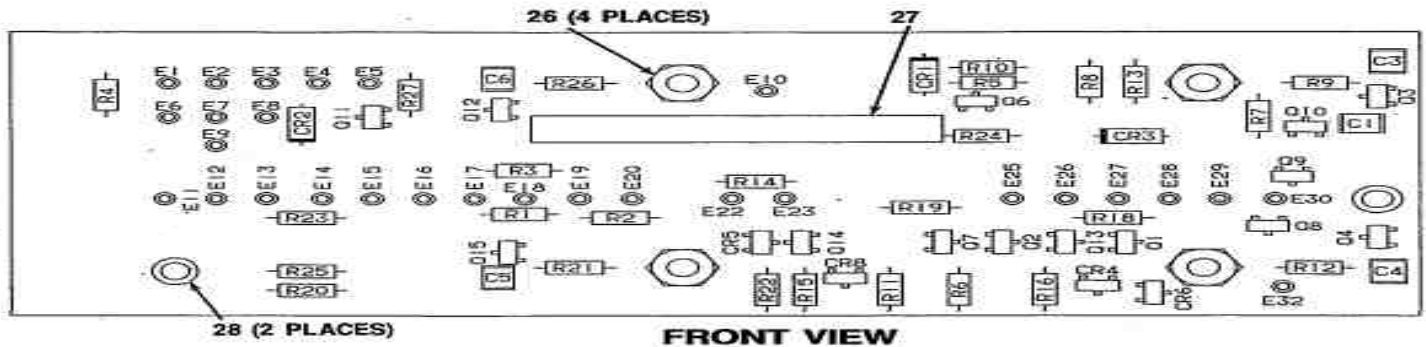

FRONT VIEW

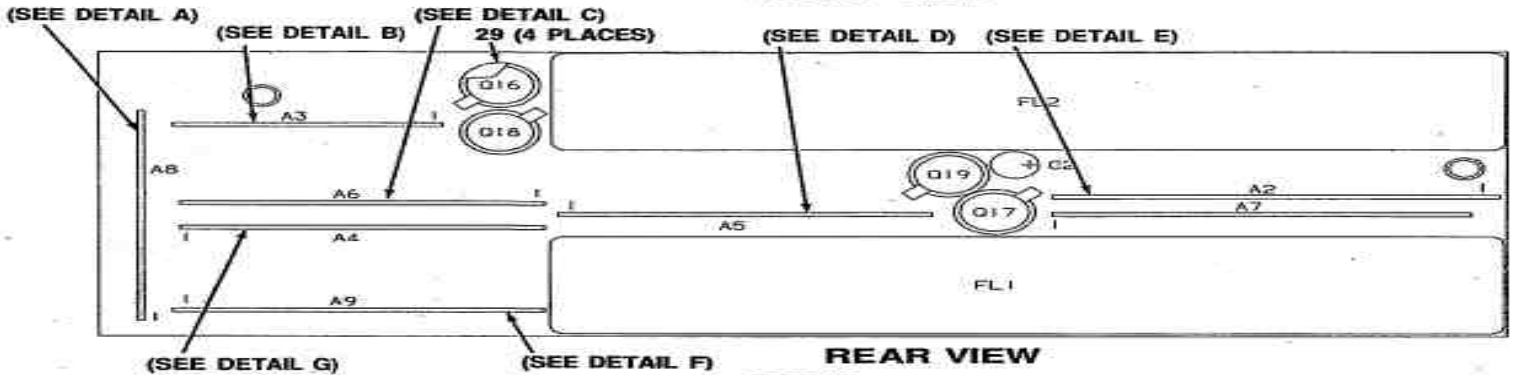

REAR VIEW

LEGEND

REF. DES.	ITEM NO.
A2	1
A3	2
A4	3
A5	4
A6	5
A7	6
A8	7
A9	8
CR1	9
CR2	9
CR3	9
CR4	10
CR5	10
CR6	10
CR8	11
C1	12
C2	13

REF. DES.	ITEM NO.
C3	12
C4	12
C5	12
C6	12
E1	14
E2	14
E3	14
E4	14
E5	14
E6	14
E7	14
E8	14
E9	14
E10	14
E11	14
E12	14
E13	14

REF. DES.	ITEM NO.
E14	14
E15	14
E16	14
E17	14
E18	14
E19	14
E20	14
E22	14
E23	14
E25	14
E26	14
E27	14
E28	14
E29	14
E30	14
E31	14
E32	14

REF. DES.	ITEM NO.
FL1	15
FL2	15
Q1	16
Q2	16
Q3	16
Q4	16
Q6	16
Q7	16
Q8	16
Q9	16
Q10	16
Q11	16
Q12	16
Q13	16
Q14	16
Q15	16
Q16	17

REF. DES.	ITEM NO.
Q17	17
Q18	17
Q19	17
R1	18
R2	19
R3	20
R4	21
R5	22
R6	22
R7	22
R8	22
R9	22
R10	23
R11	23
R12	22
R13	22
R14	24

REF. DES.	ITEM NO.
R15	23
R16	23
R18	23
R19	25
R20	24
R21	22
R22	23
R23	22
R24	24
R25	24
R26	22
R27	22

NOTE: Prefix all Reference Designators with A2A2A1A7


LEGEND

REF. DES.	ITEM NO.
CR1	30
C1	31
C2	31
C3	31
C4	31
C5	31
C6	32
Q1	33

REF. DES.	ITEM NO.
Q2	33
Q3	33
Q4	33
Q5	33
R1	34
R2	35
R3	36
R4	37

REF. DES.	ITEM NO.
R5	36
R6	34
R7	35
R8	36
R9	37
R10	36
R11	38
R12	38

REF. DES.	ITEM NO.
R13	39
R14	40
R15	41
R16	41
R17	40

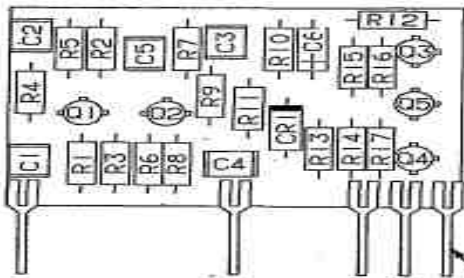

DETAIL A

42 (5 PLACES)

NOTE: Prefix all Reference Designators with A2A4A1A3


LEGEND

REF. DES.	ITEM NO.
CR1	43
C1	44
C2	45
C3	46
C4	45

REF. DES.	ITEM NO.
P1	47
P2	47
P4	47
P6	47
P7	47

REF. DES.	ITEM NO.
P8	47
R1	48
R2	49
R3	48
R4	50

REF. DES.	ITEM NO.
T1	51
T2	52
U1	53




DETAIL B

NOTE: Prefix all Reference Designators with A2A4A1A3

LEGEND


REF. DES.	ITEM NO.
CR1	54
CR2	54
C1	55
C2	56
C3	57
C4	58
C5	56
C6	56
C7	56
C8	56
P1	59
P2	59
P4	59
P5	59
P9	59
P10	59

REF. DES.	ITEM NO.
P11	59
Q1	60
Q2	61
Q3	62
R1	63
R2	64
R3	65
R4	65
R5	66
R6	63
R7	67
R8	68
R9	69
R10	65
U1	70

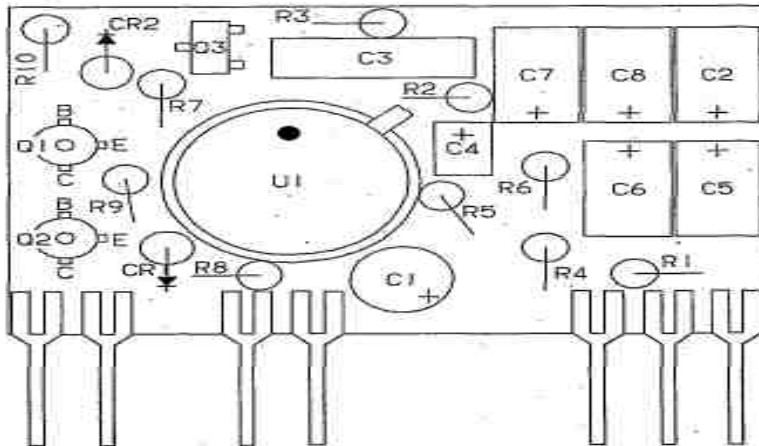

DETAIL C

NOTE: Prefix all Reference Designators with A2A4A1A6

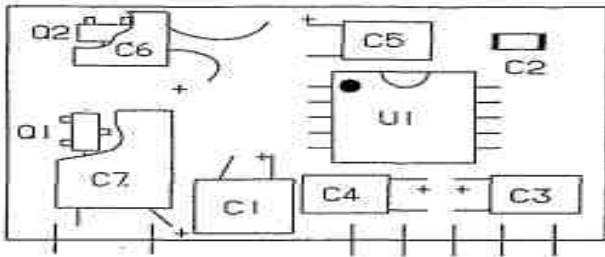


DETAIL D

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C1	71	P7	77
C2	72	P8	77
C3	73	P9	77
C4	74	P10	77
C5	74	P11	77
C6	75	Q1	78
C7	76	Q2	78
P1	77	U1	79
P3	77		

NOTE: Prefix all Reference Designators with A2A4A1A5

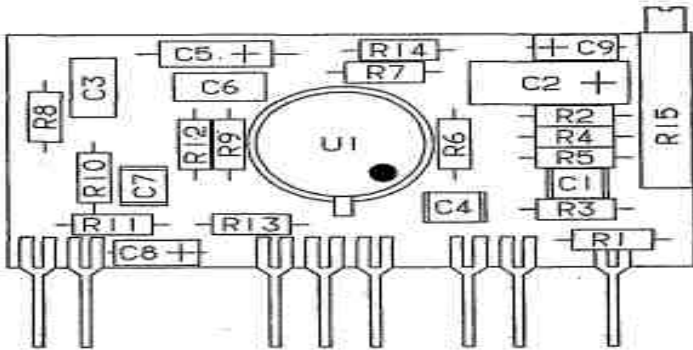


DETAIL E

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C1	80	R1	86
C2	81	R2	87
C3	82	R3	86
C4	80	R4	86
C5	83	R5	87
C6	82	R6	88
C7	80	R7	89
C8	84	R8	90
C9	84	R9	87
P1	85	R10	90
P2	85	R11	91
P6	85	R12	91
P7	85	R13	91
P8	85	R14	86
P10	85	R15	92
P11	85	U1	93
P13	85		

NOTE: Prefix all Reference Designators with A2A4A1A2

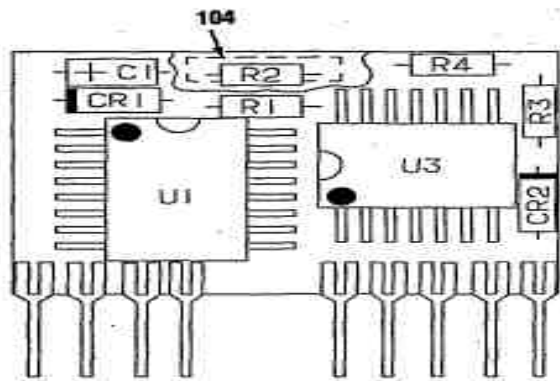


DETAIL F

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	94	P9	97
CR2	94	P10	97
C1	95	P11	97
C2	96	R1	98
P1	97	R2	99
P2	97	R3	100
P3	97	R4	101
P4	97	U1	102
P7	97	U2	103
P8	97	U3	103

NOTE: Prefix all Reference Designators with A2A4A1A9

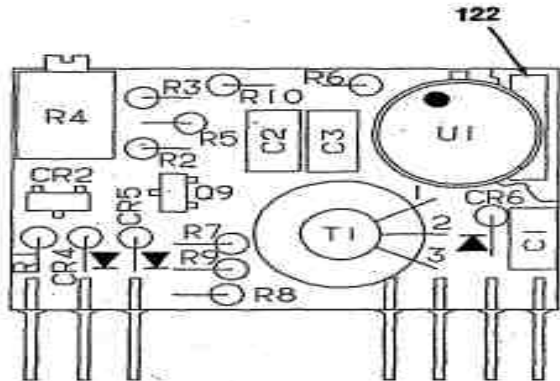

DETAIL G

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	105	Q9	111
CR2	105	Q10	111
CR4	106	R1	112
CR5	106	R2	113
CR6	107	R3	114
C1	108	R4	115
C2	109	R5	116
C3	109	R6	117
P1	110	R7	113
P2	110	R8	118
P3	110	R9	119
P8	110	R10	117
P9	110	T1	120
P10	110	U1	121
P11	110		

NOTE: Prefix all Reference Designators with A2A4A1A4

CEONL-063

FIGURE 34 CCA (A3027350)



(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020501 CCA (A3027350)	
				FIG.34	
1	PBHLL	80063	A3027669	CIRCUIT CARD ASSEMB	1
2	PBHLL	80063	A3027670	CIRCUIT CARD ASSEMB	1
3	PBHLL	80063	A3027342	CIRCUIT CARD ASSEMB	1
4	PBHLLA	80063	A3027682	THICK FILM ASSEMBLY	1
5	PBHLL	80063	A3027338	CIRCUIT CARD ASSEMB	1
6	PAHZZ	80063	A3030233	FILTER,BAND PASS--A	1
7	PBHLL	80063	A3027671	CIRCUIT CARD ASSEMB	1
8	PBHLLA	80063	A3027336	CIRCUIT CARD ASSEMB	1

9	PAHZZ	81349	JAN1N4454-1	SEMICONDUCTOR DEVIC	3
10	PAHZZ	04713	BAW56	SEMICONDUCTOR DEVIC	3
11	PAHZZ	04713	BAV70	SEMICONDUCTOR DEVIC	1
12	PAHZZ	16546	C103K1210XFPB	CAPACITOR,FIXED,CER	5
13	XBHZZ	80063	A3030859	BUSHING	1
14	PAHZZ	06776	050-1627	PLUG,TIP	30
15	PAHZZ	80063	A3030232	MECHANICAL FILTER	2
16	PAHZZ	04713	MMBF4860	TRANSISTOR	14
17	PAHZZ	04713	2N3994	TRANSISTOR	4
18	PAHZZ	81349	RCR05G131JS	RESISTOR,FIXED,COMP	1
19	PAHZZ	81349	RCR05G270JS	RESISTOR,FIXED,COMP	1
20	PAHZZ	81349	RCR05G200JS	RESISTOR,FIXED,COMP	1
21	PAHZZ	81349	RCR05G101JS	RESISTOR,FIXED,COMP	1
22	PAHZZ	81349	RCR05G104JS	RESISTOR,FIXED,COMP	11
23	PAHZZ	81349	RCR05G205JS	RESISTOR,FIXED,COMP	6
24	PAHZZ	81349	RCR05G202JS	RESISTOR,FIXED,COMP	4
25	PAHZZ	81349	RCR05G102JS	RESISTOR,FIXED,COMP	1
26	XBHZZ	80063	A3027066-1	NUT	4
27	XBHZZ	80063	A3031038-15	LABEL	1
28	XBHZZ	80063	A3027784	BUSHING	2
29	PAHZZ	81349	M38527/01-038D	MOUNTING PAD,ELECTR	4
30	PAHZZ	28480	1N5711	SEMICONDUCTOR DEVIC	1
31	PAHZZ	A3026	4-93969.0000	CAPACITOR,FIXED,CER	5
32	PAHZZ	80063	MPZ-010-105A-40	CAPACITOR,FIXED	1
33	PAHZZ	04713	MMT3904	TRANSISTOR	5
34	PAHZZ	81349	RCR05G473JS	RESISTOR,FIXED,COMP	2
35	PAHZZ	81349	RCR05G223JS	RESISTOR,FIXED,COMP	2
36	PAHZZ	81349	RCR05G302JS	RESISTOR,FIXED,COMP	4
37	PAHZZ	81349	RCR05G131JS	RESISTOR,FIXED,COMP	2
38	PAHZZ	81349	RCR05G104JS	RESISTOR,FIXED,COMP	2
39	PAHZZ	81349	RCR05G273JS	RESISTOR,FIXED,COMP	1
40	PAHZZ	81349	RCR05G123JS	RESISTOR,FIXED,COMP	2
41	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	2
42	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	5
43	PAHZZ	81349	JANTX1N5711	SEMICONDUCTOR DEVIC	1
44	PAHZZ	81349	M39014/01-1336	CAPACITOR,FIXED,CER	1
45	PAHZZ	81349	M39014/01-1593	CAPACITOR,FIXED,CER	2
46	PAHZZ	31433	T3760D475M010AS	CAPACITOR,FIXED,ELE	1

47	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	6
48	PAHZZ	81349	RCR05G101JS	RESISTOR,FIXED,COMP	1
49	PAHZZ	81349	RCR05G201JS	RESISTOR,FIXED,COMP	1
50	PAHZZ	81349	RCR05G102JS	RESISTOR,FIXED,COMP	1
51	PAHZZ	80063	A3030102	TRANSFORMER ASSEMBL	1
52	PAHZZ	80063	A3030103	TRANSFORMER ASSEMBL	1
53	PAHZZ	52648	SL612CB/CM	MICROCIRCUIT,LINEAR	1
54	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	2
55	PAHZZ	31433	T374E106M015AS	CAPACITOR,FIXED,ELE	1
56	PAHZZ	31433	T370E336M006AS	CAPACITOR,FIXED,ELE	5
57	PAHZZ	81349	M39014/02-1360	CAPACITOR,FIXED,CER	1
58	PAHZZ	31433	MC752387-5	CAPACITOR,FIXED,ELE	1
59	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	7
60	PAHZZ	04713	MMT3904	TRANSISTOR	1
61	PAHZZ	05869	750511-1	TRANSISTOR	1
62	PAHZZ	04713	MMBF4860	TRANSISTOR	1
63	PAHZZ	81349	RCR05G101JS	RESISTOR,FIXED,COMP	2
64	PAHZZ	81349	RCR05G511JS	RESISTOR,FIXED,COMP	1
65	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	3
66	PAHZZ	81349	RCR05G241JS	RESISTOR,FIXED,COMP	1
67	PAHZZ	81349	RCR05G205JS	RESISTOR,FIXED,COMP	1
68	PAHZZ	81349	RCR05G203JS	RESISTOR,FIXED,COMP	1
69	PAHZZ	81349	RCR05G513JS	RESISTOR,FIXED,COMP	1
70	PAHZZ	52648	SL621C	MICROCIRCUIT,LINEAR	1
71	PAHZZ	31433	T370C475M020AS	CAPACITOR,FIXED,ELE	1
72	PAHZZ	16546	C560J1005CFPB	CAPACITOR,FIXED,CER	1
73	PAHZZ	F2220	MTR1.5UF16V20%	CAPACITOR,FIXED,ELE	1
74	PAHZZ	17554	MMF-020-105R-10	CAPACITOR,FIXED,ELE	2
75	PAHZZ	31433	T370C335M020AS	CAPACITOR,FIXED,TAB	1
76	PAHZZ	F2220	MT3R15UF16V20%	CAPACITOR,FIXED,ELE	1
77	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	7
78	PAHZZ	89536	483743	TRANSISTOR	2
79	PAHZZ	81349	M38510/10101BHB	MICROCIRCUIT,LINEAR	1
80	PAHZZ	A3026	4-93969.0000	CAPACITOR,FIXED,CER	3
81	PAHZZ	31433	T372E336M006A5	CAPACITOR,FIXED,ELE	1
82	PAHZZ	81349	M39014/01-1593	CAPACITOR,FIXED,CER	2
83	PAHZZ	31433	T372C475M020AS	CAPACITOR,FIXED,ELE	1
84	PAHZZ	31433	T372B105M020AS	CAPACITOR,FIXED,ELE	2

85	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	8
86	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	4
87	PAHZZ	81349	RCR05G510JS	RESISTOR,FIXED,COMP	3
88	PAHZZ	81349	RCR05G511JS	RESISTOR,FIXED,COMP	1
89	PAHZZ	81349	RCR05G682JS	RESISTOR,FIXED,COMP	1
90	PAHZZ	81349	RCR05G102JS	RESISTOR,FIXED,COMP	2
91	PAHZZ	81349	RCR05G202JS	RESISTOR,FIXED,COMP	3
92	PAHZZ	32997	3082P-45-503	RESISTOR,VARIABLE,N	1
93	PAHZZ	96214	536958-1	MICROCIRCUIT,LINEAR	1
94	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	2
95	PAHZZ	31433	T372B225M010AS	CAPACITOR,FIXED,ELE	1
96	PAHZZ	16546	C103K1210XFPB	CAPACITOR,FIXED,CER	1
97	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	9
98	PAHZZ	81349	RCR05G514JS	RESISTOR,FIXED,COMP	1
99	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	1
100	PAHZZ	81349	RCR05G563JS	RESISTOR,FIXED,COMP	1
101	PAHZZ	81349	RCR05G473JS	RESISTOR,FIXED,COMP	1
102	XBHZZ	02735	CD4027BK3	MICROCIRCUIT,DIGITA	1
103	XBHZZ	06481	971618-0411	MICROCIRCUIT,DIGITA	2
104	XBHZZ	80063	A3031466-8	LABEL	1
105	PAHZZ	04713	BAV99	SEMICONDUCTOR DEVIC	2
106	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	2
107	PAHZZ	81349	JANTX1N5711	SEMICONDUCTOR DEVIC	1
108	PAHZZ	81349	M39014/01-1357	CAPACITOR,FIXED,CER	1
109	PAHZZ	81349	M39014/01-1593	CAPACITOR,FIXED,CER	2
110	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	7
111	PAHZZ	04713	MMBF4860	TRANSISTOR	2
112	PAHZZ	81349	RCR05G751JS	RESISTOR,FIXED,COMP	1
113	PAHZZ	81349	RCR05G205JS	RESISTOR,FIXED,COMP	2
114	PAHZZ	81349	RCR05G302JS	RESISTOR,FIXED,COMP	1
115	PAHZZ	81349	RJR26FX502R	RESISTOR,VARIABLE,N	1
116	PAHZZ	81349	RCR05G272JS	RESISTOR,FIXED,COMP	1
117	PAHZZ	81349	RCR05G101JS	RESISTOR,FIXED,COMP	2
118	PAHZZ	81349	RCR05G104JS	RESISTOR,FIXED,COMP	1
119	PAHZZ	81349	RCR05G473JS	RESISTOR,FIXED,COMP	1
120	PAHZZ	80063	A3030104	TRANSFORMER ASSEMBL	1
121	PAHZZ	52648	SL612CB/CM	MICROCIRCUIT,LINEAR	1

122	XBHZZ	80063	A3031466-15	LABEL	1
END OF FIGURE					

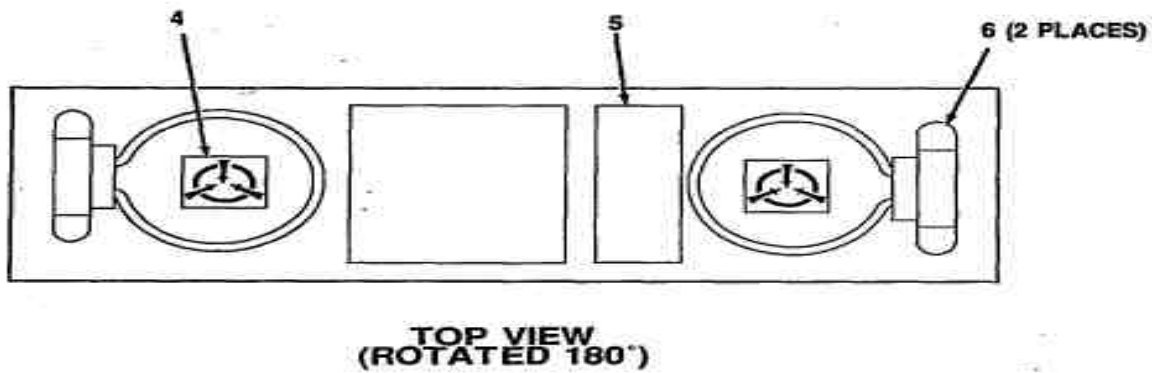
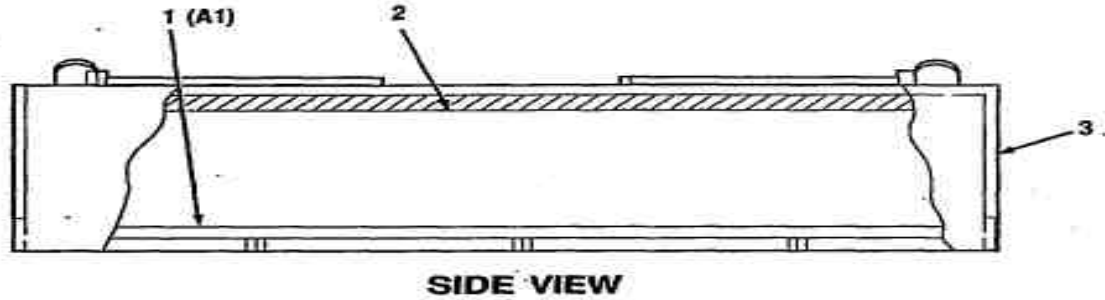


CEONL-064

FIGURE 35 ATU Sequence Mod Assy A1A3A5 (A3026006)


(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 010206 ATU SEQUENCE MODULE ASSEMBLY A1A3A5 (A3026006)	
				FIG.35	
1	PBHLL	80063	A3027348	CIRCUIT CARD ASSEMB (SEE FIG. 36 FOR BREAKDOEN)	1
2	PCHZZ	80063	A3027359	GASKET	1
3	XBHZZ	80063	A3027358	HOUSING--AT4 SEQUEN	1
4	XBHZZ	80063	A3034571-2	LABEL, ELECTROSTATI	1

5	XBHZZ	80063	A3031038-193	LABEL	1
6	PAHZZ	80063	A3027859	HANDLE,BAIL	2
END OF FIGURE					

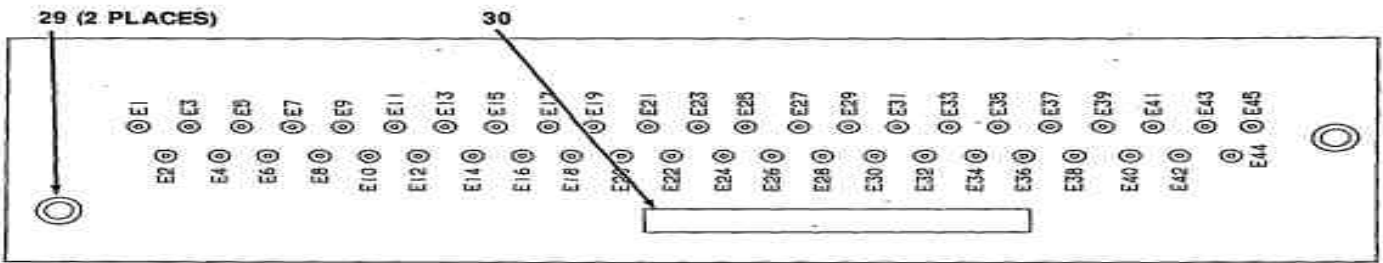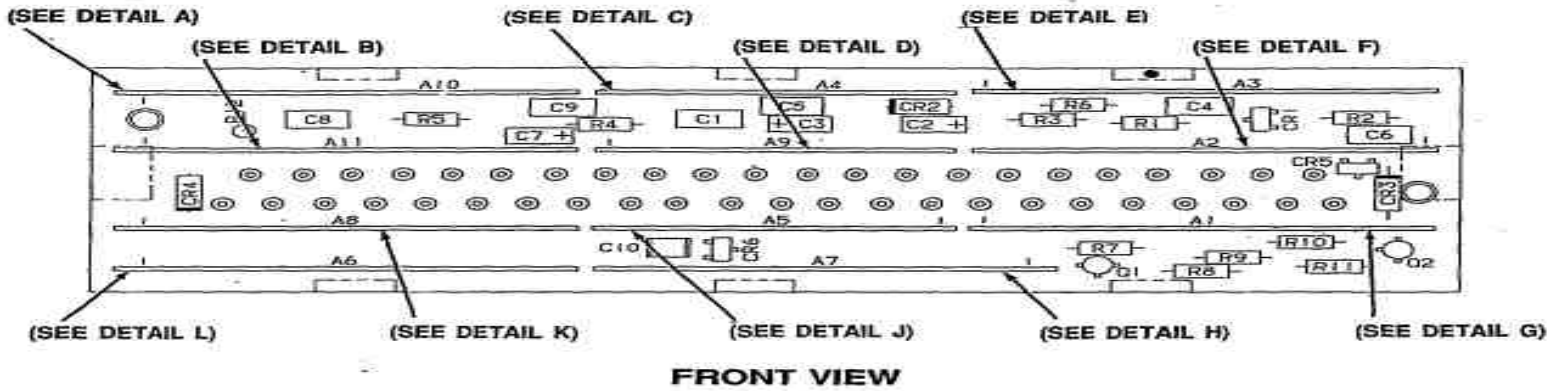

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
A1	1	CR5	14	E5	19	E20	19	E35	19	R3	23
A2	2	CR6	14	E6	19	E21	19	E36	19	R4	24
A3	3	C1	15	E7	19	E22	19	E37	19	R5	22
A4	4	C2	16	E8	19	E23	19	E38	19	R6	25
A5	5	C3	16	E9	19	E24	19	E39	19	R7	26
A6	6	C4	17	E10	19	E25	19	E40	19	R8	27
A7	7	C5	17	E11	19	E26	19	E41	19	R9	27
A8	8	C6	17	E12	19	E27	19	E42	19	R10	28
A9	9	C7	16	E13	19	E28	19	E43	19	R11	27
A10	10	C8	18	E14	19	E29	19	E44	19	R12	26
A11	11	C9	17	E15	19	E30	19	E45	19		
CR1	12	E1	19	E16	19	E31	19	Q1	20		
CR2	13	E2	19	E17	19	E32	19	Q2	21		
CR3	13	E3	19	E18	19	E33	19	R1	22		
CR4	13	E4	19	E19	19	E34	19	R2	22		

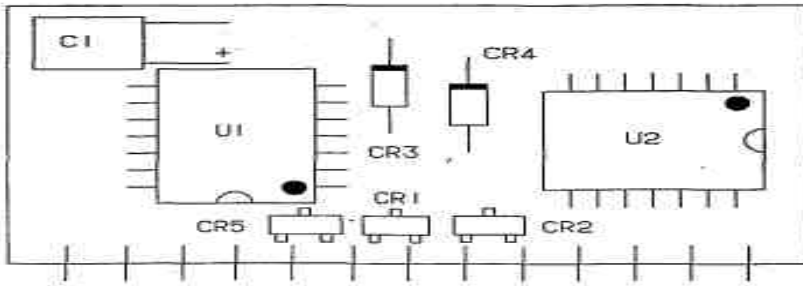


DETAIL A

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	31	P6	35
CR2	32	P7	35
CR3	33	P8	35
CR4	33	P9	35
CR5	31	P10	35
C1	34	P11	35
P1	35	P12	35
P2	35	P13	35
P3	35	U1	36
P4	35	U2	37
P5	35		

NOTE: Prefix all Reference Designators with A2A5A1A10

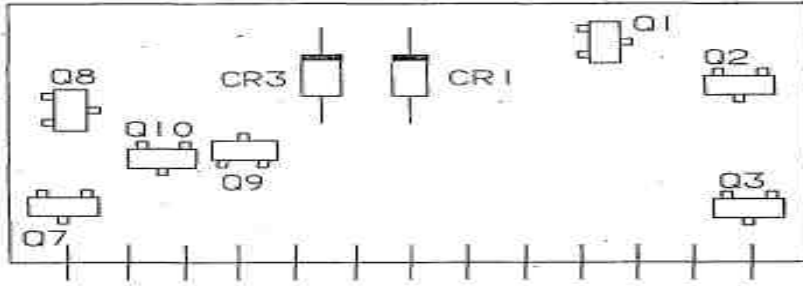


DETAIL B

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	38	P11	39
CR2	38	P12	39
CR3	38	P13	39
P1	39	Q1	40
P2	39	Q2	41
P3	39	Q3	40
P4	39	Q4	40
P5	39	Q5	41
P6	39	Q6	40
P7	39	Q7	40
P8	39	Q8	40
P9	39	Q9	40
P10	39	Q10	41

NOTE: Prefix all Reference Designators with A2A5A1A11

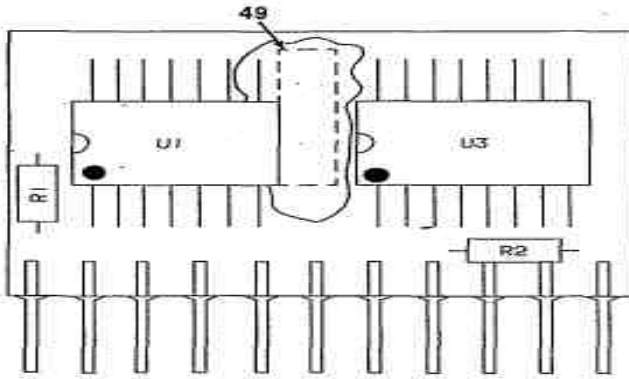


DETAIL C


LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C1	42	P9	43
P1	43	P10	43
P2	43	P11	43
P3	43	R1	44
P4	43	R2	45
P5	43	U1	46
P6	43	U2	47
P7	43	U3	48
P8	43		


NOTE: Prefix all Reference Designators with A2A5A1A4

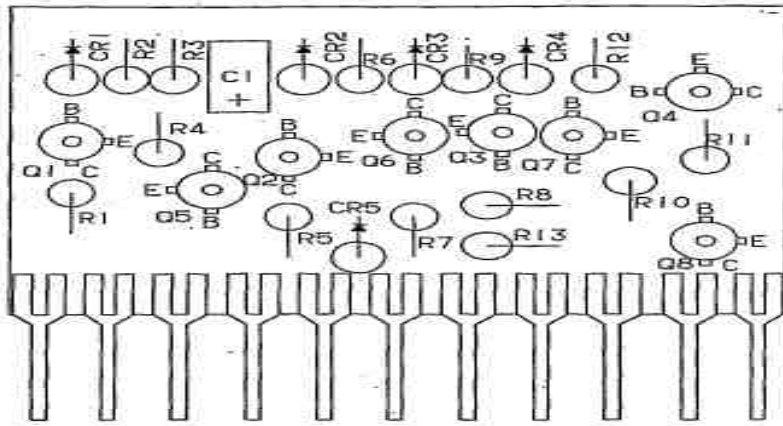

DETAIL D

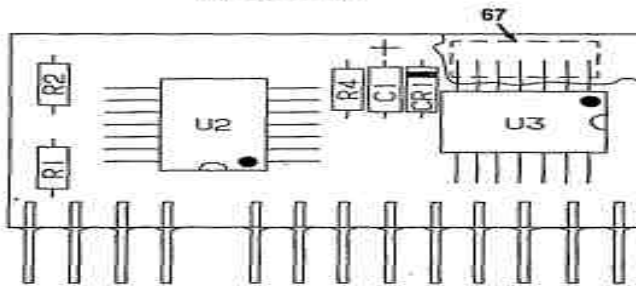

DETAIL E

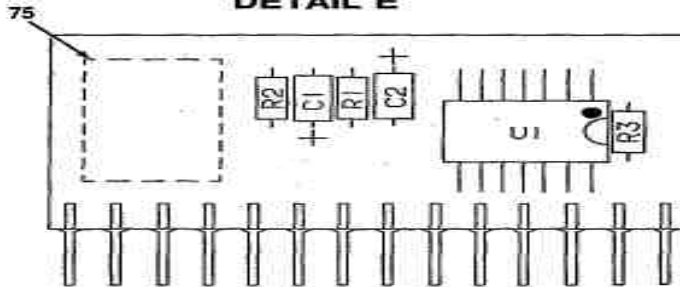

DETAIL F

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	50	Q3	53
CR2	50	Q4	53
CR3	50	Q5	54
CR4	50	Q6	54
CR5	50	Q7	54
C1	51	Q8	54
P1	52	R1	55
P2	52	R2	56
P3	52	R3	57
P4	52	R4	55
P5	52	R5	58
P6	52	R6	56
P7	52	R7	57
P8	52	R8	55
P9	52	R9	56
P10	52	R10	57
P11	52	R11	55
Q1	53	R12	56
Q2	53	R13	57

NOTE: Prefix all Reference Designators with A2A5A1A9

LEGEND


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	59	P12	61
C1	60	P13	61
P1	61	P14	61
P2	61	R1	62
P3	61	R2	63
P4	61	R3	62
P6	61	R4	64
P7	61	U1	65
P8	61	U2	66
P9	61	U3	66
P10	61		
P11	61		

NOTE: Prefix all Reference Designators with A2A5A1A3


LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C1	68	P10	69
C2	68	P11	69
P1	69	P12	69
P2	69	P13	69
P3	69	P14	69
P4	69	R1	70
P5	69	R2	71
P6	69	R3	72
P7	69	U1	73
P8	69	U2	73
P9	69	U3	74


NOTE: Prefix all Reference Designators with A2A5A1A2 CEONL-067

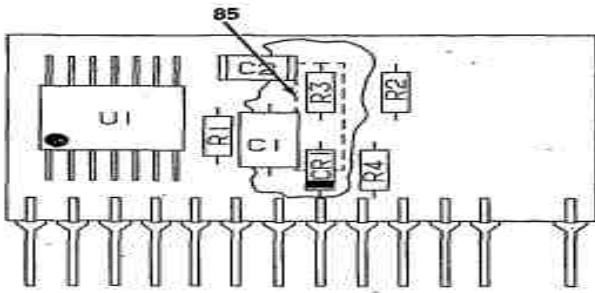

DETAIL G

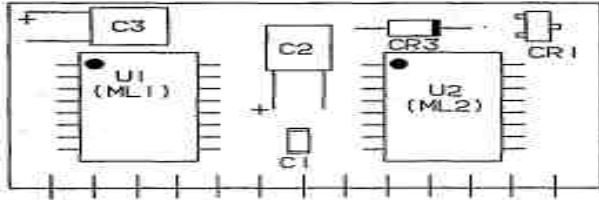

DETAIL H

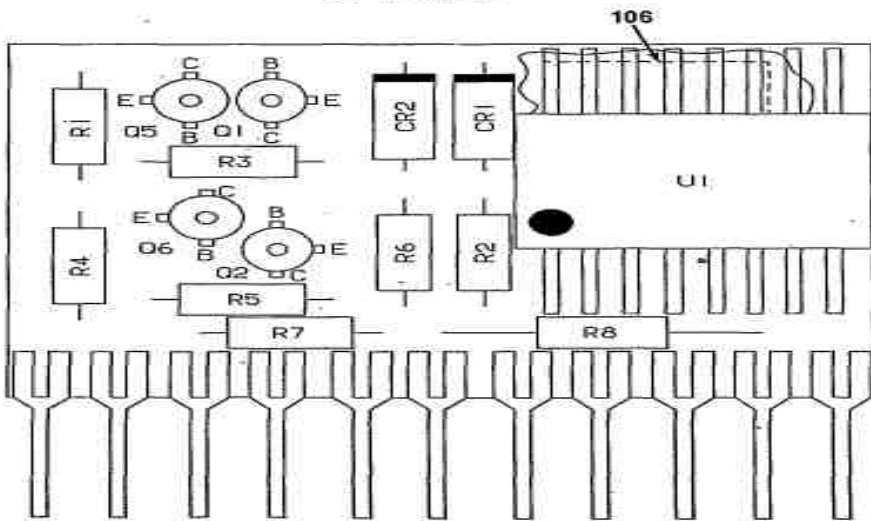

DETAIL J

LEGEND

REF. DES.	ITEM NO.
CR1	76
C1	77
C2	78
P1	79
P2	79
P3	79
P4	79
P5	79
P6	79
P7	79
P8	79
P9	79

REF. DES.	ITEM NO.
P10	79
P11	79
P12	79
P14	79
R1	80
R2	81
R3	80
R4	82
U1	83
U2	84
U3	84

NOTE: Prefix all Reference Designators with A2A5A1A1

LEGEND

REF. DES.	ITEM NO.
CR1	86
CR2	87
CR3	88
C1	89
C2	90
C3	91
C4	92
P1	93
P2	93
P3	93
P4	93
P5	93

REF. DES.	ITEM NO.
P6	93
P7	93
P8	93
P9	93
P10	93
P11	93
P12	93
P13	93
U1	94
U2	95
U3	96


NOTE: Prefix all Reference Designators with A2A5A1A7

LEGEND

REF. DES.	ITEM NO.
CR1	97
CR2	97
P1	98
P2	98
P3	98
P4	98
P5	98
P6	98
P7	98
P8	98
P9	98
P10	98
P11	98
Q1	99

REF. DES.	ITEM NO.
Q2	99
Q5	100
Q6	100
R1	101
R2	102
R3	101
R4	101
R5	101
R6	102
R7	103
R8	103
U1	104
U2	105

NOTE: Prefix all Reference Designators with A2A5A1A5

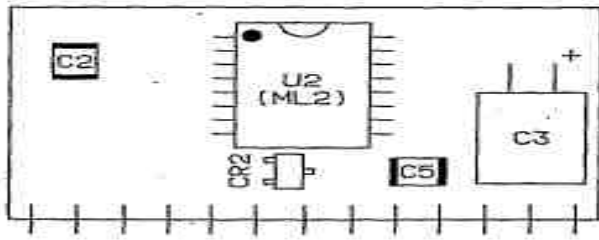


DETAIL K

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	107	P5	111
CR2	108	P6	111
CR3	107	P7	111
C1	109	P8	111
C2	109	P9	111
C3	110	P10	111
C4	109	P11	111
C5	109	P12	111
P1	111	P13	111
P2	111	U1	112
P3	111	U2	113
P4	111		

NOTE: Prefix all Reference Designators with A2A5A1A8

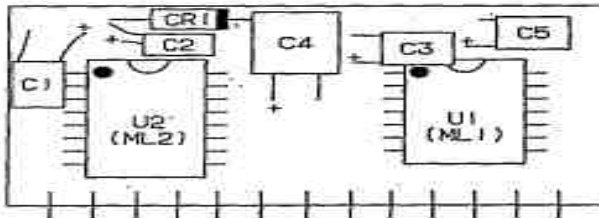

DETAIL L

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	114	P6	117
C1	115	P7	117
C2	115	P8	117
C3	115	P9	117
C4	116	P10	117
C5	115	P11	117
P1	117	P12	117
P2	117	P13	117
P3	117	U1	118
P4	117	U2	119
P5	117		

NOTE: Prefix all Reference Designators with A2A5A1A6

CEONL-069


FIGURE 36 CCA (A3027348)

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 01020601 CCA (A3027348)	
				FIG.36	
1	PBHLA	80063	A3027332	CIRCUIT CARD ASSEMB	1
2	PBHLA	80063	A3027331	CIRCUIT CARD ASSEMB	1
3	PBHLA	80063	A3027330	CIRCUIT CARD ASSEMB	1
4	PBHLA	80063	A3027340	CIRCUIT CARD ASSEMB	1
5	PBHLA	80063	A3027334	CIRCUIT CARD ASSEMB	1
6	PBHLA	80063	A3027674	THICK FILM ASSEMBLY	1
7	PBHLA	80063	A3027677	THICK FILM ASSEMBLY	1
8	PBHLA	80063	A3027675	THICK FILM ASSEMBLY	1

9	PBHLL	80063	A3027333	CIRCUIT CARD ASSEMB	1
10	PBHLLA	80063	A3027676	THICK FILM ASSEMBLY	1
11	PBHLL	80063	A3027678	THICK FILM ASSEMBLY	1
12	PAHZZ	04713	BAW56	SEMICONDUCTOR DEVIC	1
13	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	3
14	PAHZZ	04713	BAV70	SEMICONDUCTOR DEVIC	2
15	PAHZZ	81349	M39014/01-1575	CAPACITOR,FIXED,CER	1
16	PAHZZ	31433	T370C225M020AS	CAPACITOR,FIXED,ELE	3
17	PAHZZ	81349	M39014/01-1593	CAPACITOR,FIXED,CER	4
18	PAHZZ	81349	M39014/01-1357	CAPACITOR,FIXED,CER	1
19	PAHZZ	06776	050-1627	PLUG,TIP	45
20	PAHZZ	04713	MMT3904	TRANSISTOR	1
21	PAHZZ	05869	750511-1	TRANSISTOR	1
22	PAHZZ	81349	RCR05G330JS	RESISTOR,FIXED,COMP	3
23	PAHZZ	81349	RCR05G200JS	RESISTOR,FIXED,COMP	1
24	PAHZZ	81349	RCR05G120JS	RESISTOR,FIXED,COMP	1
25	PAHZZ	81349	RCR05G203JS	RESISTOR,FIXED,COMP	1
26	PAHZZ	81349	RCR05G104JS	RESISTOR,FIXED,COMP	2
27	PAHZZ	81349	RCR05G513JS	RESISTOR,FIXED,COMP	3
28	PAHZZ	81349	RCR05G331JS	RESISTOR,FIXED,COMP	1
29	XBHZZ	80063	A3027784	BUSHING	2
30	XBHZZ	80063	A3031038-60	LABEL	1
31	PAHZZ	04713	BAV70	SEMICONDUCTOR DEVIC	2
32	PAHZZ	04713	BAW56	SEMICONDUCTOR DEVIC	1
33	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	2
34	PAHZZ	17554	MMF-020-105R-10	CAPACITOR,FIXED,ELE	1
35	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	13
36	PAHZZ	06481	974082-0411	MICROCIRCUIT,DIGITA	1
37	PAHZZ	14933	7901101CB	MICROCIRCUIT,DIGITA	1
38	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	3
39	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	13
40	PAHZZ	89536	483743	TRANSISTOR	7
41	PAHZZ	04713	MMBT2907	TRANSISTOR	3
42	PAHZZ	31433	T370D106M006AS	CAPACITOR,FIXED,CER	1
43	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	11
44	PAHZZ	81349	RCR05G513JS	RESISTOR,FIXED,COMP	1
45	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	1
46	PAHZZ	02735	CD4011BK3	MICROCIRCUIT,DIGITA	1

47	PAHZZ	06481	974082-0411	MICROCIRCUIT,DIGITA	1
48	PAHZZ	07263	4049BFMQB	MICROCIRCUIT,DIGITA	1
49	XBHZZ	80063	A3031466-14	LABEL	11
50	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	5
51	PAHZZ	31433	T372B474M035AS	CAPACITOR,FIXED,ELE	1
52	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	11
53	PAHZZ	04713	MMT3904	TRANSISTOR	4
54	PAHZZ	05869	750511-1	TRANSISTOR	4
55	PAHZZ	81349	RCR05G513JS	RESISTOR,FIXED,COMP	4
56	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	4
57	PAHZZ	81349	RCR05G203JS	RESISTOR,FIXED,COMP	4
58	PAHZZ	81349	RCR05G473JS	RESISTOR,FIXED,COMP	1
59	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	1
60	PAHZZ	31433	T372B105M020AS	CAPACITOR,FIXED,ELE	1
61	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	13
62	PAHZZ	81349	RCR05G104JS	RESISTOR,FIXED,COMP	2
63	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	1
64	PAHZZ	81349	RCR05G105JS	RESISTOR,FIXED,COMP	1
65	PAHZZ	07263	4049BFMQB	MICROCIRCUIT,DIGITA	1
66	PAHZZ	06481	974082-0411	MICROCIRCUIT,DIGITA	2
67	XBHZZ	80063	A3031466-16	LABEL	1
68	PAHZZ	31433	T372B225M010AS	CAPACITOR,FIXED,ELE	2
69	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	14
70	PAHZZ	81349	RCR05G104JS	RESISTOR,FIXED,COMP	1
71	PAHZZ	81349	RCR05G514JS	RESISTOR,FIXED,COMP	1
72	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	1
73	PAHZZ	02735	CD4011BK3	MICROCIRCUIT,DIGITA	2
74	XBHZZ	02735	CD4027BK3	MICROCIRCUIT,DIGITA	1
75	XBHZZ	80063	A3031466-13	LABEL	1
76	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	1
77	PAHZZ	80063	A3026718-28	CAPACITOR,FIXED,TAN	1
78	PAHZZ	A3026	4-93969.0000	CAPACITOR,FIXED,CER	1
79	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	13
80	PAHZZ	81349	RCR05G104JS	RESISTOR,FIXED,COMP	2
81	PAHZZ	81349	RCR05G513JS	RESISTOR,FIXED,COMP	1
82	PAHZZ	81349	RCR05G223JS	RESISTOR,FIXED,COMP	1
83	PAHZZ	06481	974082-0411	MICROCIRCUIT,DIGITA	1
84	PAHZZ	02735	CD4011BK3	MICROCIRCUIT,DIGITA	2

85	XBHZZ	80063	A3031466-18	LABEL	1
86	PAHZZ	04713	BAV70	SEMICONDUCTOR DEVIC	1
87	PAHZZ	04713	BAW56	SEMICONDUCTOR DEVIC	1
88	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	1
89	PAHZZ	A3026	4-93969.0000	CAPACITOR,FIXED,CER	1
90	PAHZZ	31433	T370B685M010AS	CAPACITOR,FIXED,ELE	1
91	PAHZZ	31433	MC752387-5	CAPACITOR,FIXED,ELE	1
92	PAHZZ	16546	C102K1005XFPB	CAPACITOR,FIXED,CER	1
93	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	13
94	PAHZZ	18714	CD4098BK	MICROCIRCUIT,DIGITA	1
95	XBHZZ	02735	CD4027BK3	MICROCIRCUIT,DIGITA	1
96	PAHZZ	02735	CD4011BK3	MICROCIRCUIT,DIGITA	1
97	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	2
98	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	11
99	PAHZZ	04713	MMT3904	TRANSISTOR	2
100	PAHZZ	05869	750511-1	TRANSISTOR	2
101	PAHZZ	81349	RCR05G203JS	RESISTOR,FIXED,COMP	4
102	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	2
103	PAHZZ	81349	RCR05G104JS	RESISTOR,FIXED,COMP	2
104	PAHZZ	07263	4049BFMQB	MICROCIRCUIT,DIGITA	1
105	XBHZZ	06481	971618-0411	MICROCIRCUIT,DIGITA	1
106	XBHZZ	80063	A3031466-10	LABEL	1
107	PAHZZ	04713	BAV70	SEMICONDUCTOR DEVIC	2
108	PAHZZ	04713	BAW56	SEMICONDUCTOR DEVIC	1
109	PAHZZ	A3026	4-93969.0000	CAPACITOR,FIXED,CER	4
110	PAHZZ	31433	T370E336M006AS	CAPACITOR,FIXED,ELE	1
111	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	13
			1-1		
112	PAHZZ	02735	CD4011BK3	MICROCIRCUIT,DIGITA	1
113	PAHZZ	18714	CD4098BK	MICROCIRCUIT,DIGITA	1
114	PAHZZ	12954	1N4454	SEMICONDUCTOR DEVIC	1
115	PAHZZ	17554	MMF-020-105R-10	CAPACITOR,FIXED,ELE	4
116	PAHZZ	31433	T370B685M010AS	CAPACITOR,FIXED,ELE	1
117	PAHZZ	F7303	518-0718-0-42-1-1-1	CONTACT	13
118	PAHZZ	06481	974082-0411	MICROCIRCUIT,DIGITA	1
119	PAHZZ	18714	CD4098BK	MICROCIRCUIT,DIGITA	1
				END OF FIGURE	

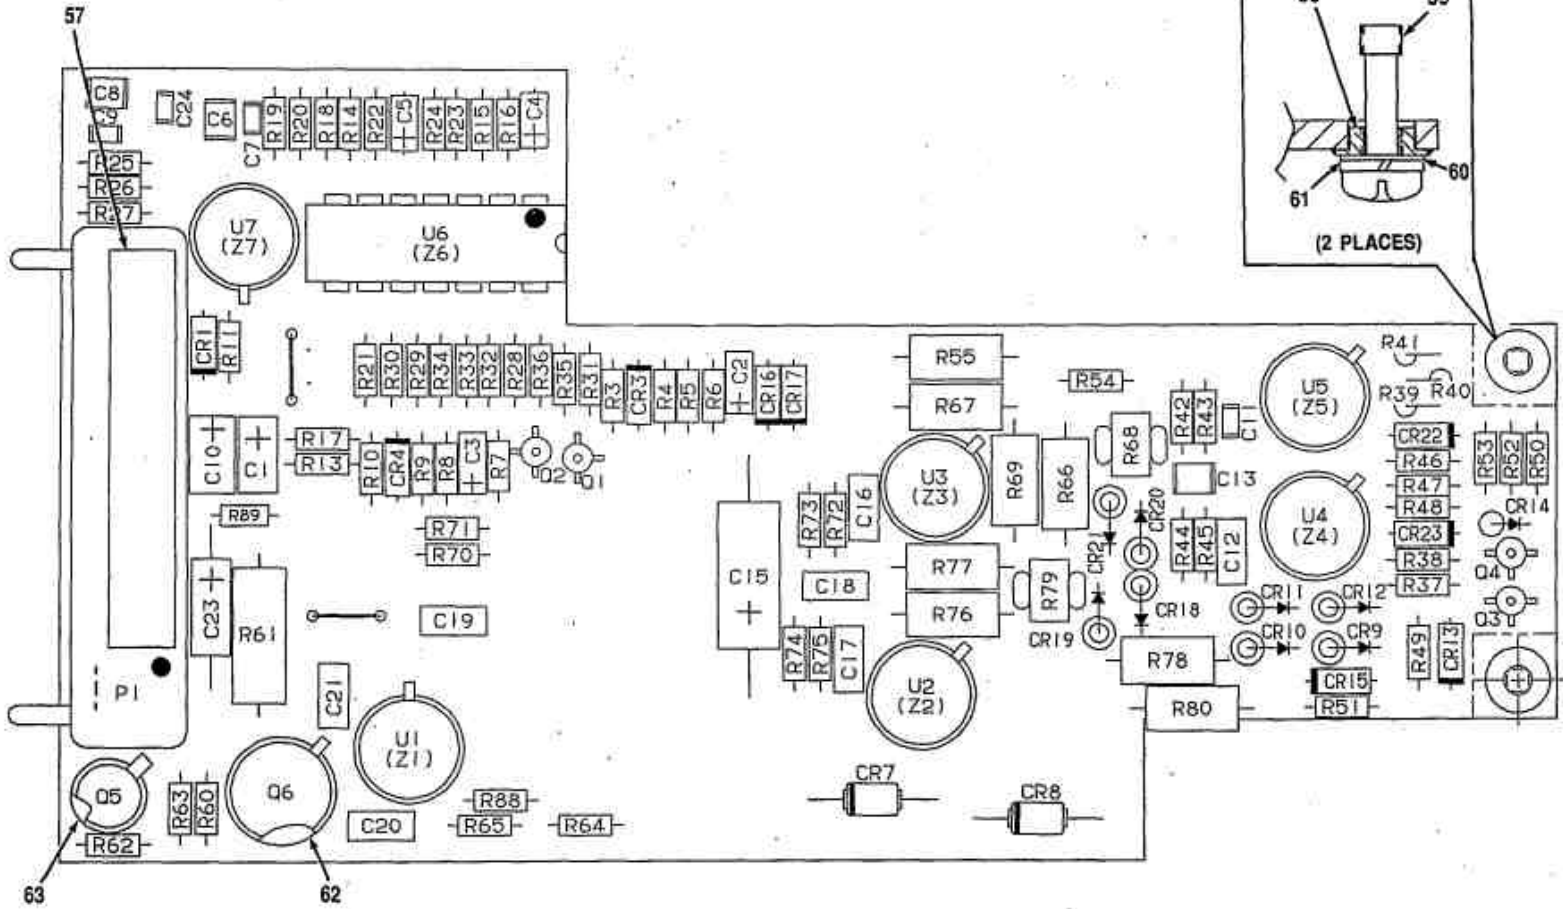

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
CR1	1	C3	4	Q2	17	R21	25	R43	20	R69	50
CR3	1	C4	5	Q3	17	R22	26	R44	20	R70	37
CR4	1	C5	5	Q4	17	R23	31	R45	20	R71	38
CR7	2	C6	6	Q5	18	R24	31	R46	39	R72	20
CR8	2	C7	7	Q6	19	R25	32	R47	20	R73	20
CR9	2	C8	6	R3	20	R26	33	R48	38	R74	20
CR10	2	C9	7	R4	21	R27	20	R49	40	R75	20
CR11	2	C10	8	R5	22	R28	25	R50	40	R76	48
CR12	2	C11	7	R6	23	R29	34	R51	40	R77	42
CR13	1	C12	9	R7	23	R30	23	R52	41	R78	47
CR14	1	C13	6	R8	22	R31	35	R53	35	R79	49
CR15	1	C15	10	R9	21	R32	25	R54	35	R80	50
CR16	1	C16	9	R10	20	R33	34	R55	42	R88	51
CR17	1	C17	9	R11	24	R34	23	R60	20	R89	52
CR18	2	C18	11	R13	25	R35	36	R61	43	U1	53
CR19	2	C19	12	R14	26	R36	36	R62	44	U2	54
CR20	2	C20	13	R15	27	R37	37	R63	45	U3	54
CR21	2	C21	9	R16	28	R38	38	R64	21	U4	54
CR22	1	C23	14	R17	29	R39	38	R65	46	U5	54
CR23	1	C24	15	R18	30	R40	20	R66	47	U6	55
C1	3	P1	16	R19	20	R41	39	R67	48	U7	56
C2	4	Q1	17	R20	20	R42	20	R68	49		

CEOML-071

FIGURE 37 Servo Amp CCA A1A2A6 (A3026007)


(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 010207 SERVO AMPLIFIER CCA A1A2A6 (A3026007)	
				FIG.37	
1	PAHZZ	81349	JANTX1N4454	SEMICONDUCTOR DEVIC	10
2	PAHZZ	81349	JAN1N3611	SEMICONDUCTOR DEVIC	10
3	XBHZZ	31433	T370-D106M020AS	CAPACITOR, FIXED, ELE	1
4	PAHZZ	31433	T372B474M035AS	CAPACITOR, FIXED, ELE	2
5	PAHZZ	31433	T372B106M002AS	CAPACITOR, FIXED, ELE	2
6	PAHZZ	A3026	4-93969.0000	CAPACITOR, FIXED, CER	3
7	PAHZZ	16546	C102K1005XFPB	CAPACITOR, FIXED, CER	3

8	PAHZZ	31433	T370E336M006AS	CAPACITOR,FIXED,ELE	1
9	PAHZZ	81349	M39014/01-1357	CAPACITOR,FIXED,CER	4
10	PAHZZ	81349	M39003/01-3076	CAPACITOR,FIXED,ELE	1
11	PAHZZ	81349	M39014/01-1593	CAPACITOR,FIXED,CER	1
12	PAHZZ	F2220	MT4R22UF15V20%	CAPACITOR,FIXED,TAN	1
13	PAHZZ	81349	M39014/01-1575	CAPACITOR,FIXED,CER	1
14	PAHZZ	31433	T372D106M020AS	CAPACITOR,FIXED,ELE	1
15	PAHZZ	16546	C152K1005XFPB	CAPACITOR,FIXED,CER	1
16	PAHZZ	81349	M55302/7-03	CONNECTOR,RECEPTACL	1
17	PAHZZ	04713	MMT3904	TRANSISTOR	4
18	PAHZZ	81349	JAN2N2222A	TRANSISTOR	1
19	PAHZZ	80063	A3031526	TRANSISTOR	1
20	PAHZZ	81349	RCR05G512JS	RESISTOR,FIXED,COMP	16
21	PAHZZ	81349	RCR05G102JS	RESISTOR,FIXED,COMP	3
22	PAHZZ	81349	RCR05G182JS	RESISTOR,FIXED,COMP	2
23	PAHZZ	81349	RCR05G103JS	RESISTOR,FIXED,COMP	4
24	PAHZZ	81349	RCR05G392JS	RESISTOR,FIXED,COMP	1
25	PAHZZ	81349	RCR05G244JS	RESISTOR,FIXED,COMP	4
26	PAHZZ	81349	RCR05G823JS	RESISTOR,FIXED,COMP	2
27	PAHZZ	81349	RCR05G333JS	RESISTOR,FIXED,COMP	1
28	PAHZZ	81349	RCR05G134JS	RESISTOR,FIXED,COMP	1
29	PAHZZ	81349	RCR05G303JS	RESISTOR,FIXED,COMP	1
30	PAHZZ	81349	RCR05G334JS	RESISTOR,FIXED,COMP	1
31	PAHZZ	81349	RCR05G304JS	RESISTOR,FIXED,COMP	2
32	PAHZZ	81349	RCR05G204JS	RESISTOR,FIXED,COMP	1
33	PAHZZ	81349	RCR05G242JS	RESISTOR,FIXED,COMP	1
34	PAHZZ	81349	RCR05G753JS	RESISTOR,FIXED,COMP	2
35	PAHZZ	81349	RCR05G273JS	RESISTOR,FIXED,COMP	3
36	PAHZZ	81349	RCR05G622JS	RESISTOR,FIXED,COMP	2
37	PAHZZ	81349	RCR05G821JS	RESISTOR,FIXED,COMP	2
38	PAHZZ	81349	RCR05G912JS	RESISTOR,FIXED,COMP	4
39	PAHZZ	81349	RCR05G824JS	RESISTOR,FIXED,COMP	2
40	PAHZZ	81349	RCR05G203JS	RESISTOR,FIXED,COMP	3
41	PAHZZ	81349	RCR05G152JS	RESISTOR,FIXED,COMP	1
42	PAHZZ	81349	RNC55K7501FS	RESISTOR,FIXED,FILM	2
43	PAHZZ	81349	RCR20G202JS	RESISTOR,FIXED,COMP	1
44	PAHZZ	81349	RCR05G222JS	RESISTOR,FIXED,COMP	1
45	PAHZZ	81349	RCR05G301JS	RESISTOR,FIXED,COMP	1

46	PAHZZ	81349	RCR05G562JS	RESISTOR, FIXED, COMP	1
47	PAHZZ	81349	RNC55K3921FS	RESISTOR, FIXED, FILM	2
48	PAHZZ	81349	RNC55K2943FS	RESISTOR, FIXED, FILM	2
49	PAH2Z	80063	A3027250-1	RESISTOR, THERMAL	2
50	PAHZZ	81349	RNC55K2102FS	RESISTOR, FIXED, FILM	2
51	PAHZZ	81349	RCR05G510JS	RESISTOR, FIXED, COMP	1
52	PAHZZ	81349	RCR05G240JS	RESISTOR, FIXED, COMP	1
53	PAHZZ	81349	M38510/10901BGC	MICROCIRCUIT, LINEAR	1
54	PAHZZ	09344	PC73678-1	MICROCIRCUIT, LINEAR	4
55	PAHZZ	07933	LM139J	MICROCIRCUIT, LINEAR	1
56	PAHZZ	04713	MC3558G	MICROCIRCUIT, LINEAR	1
57	XBHZZ	80063	A3031038-214	LABEL	1
58	XBHZZ	80063	A3027787	BUSHING, THREADED	2
59	PAHZZ	80063	A3027728	SCREW, CAPTIVE	2
60	PAHZZ	A3026	3-10285.005//C	WASHER, FLAT	2
61	PAHZZ	A3026	3-10311-002	WASHER, LOCK	2
62	PAHZZ	81349	M38527/02-018D	MOUNTING PAD, ELECTR	1
63	PAHZZ	13103	445214-102	INSULATOR--TRANSIST	1
				END OF FIGURE	

Section III

Special Tools

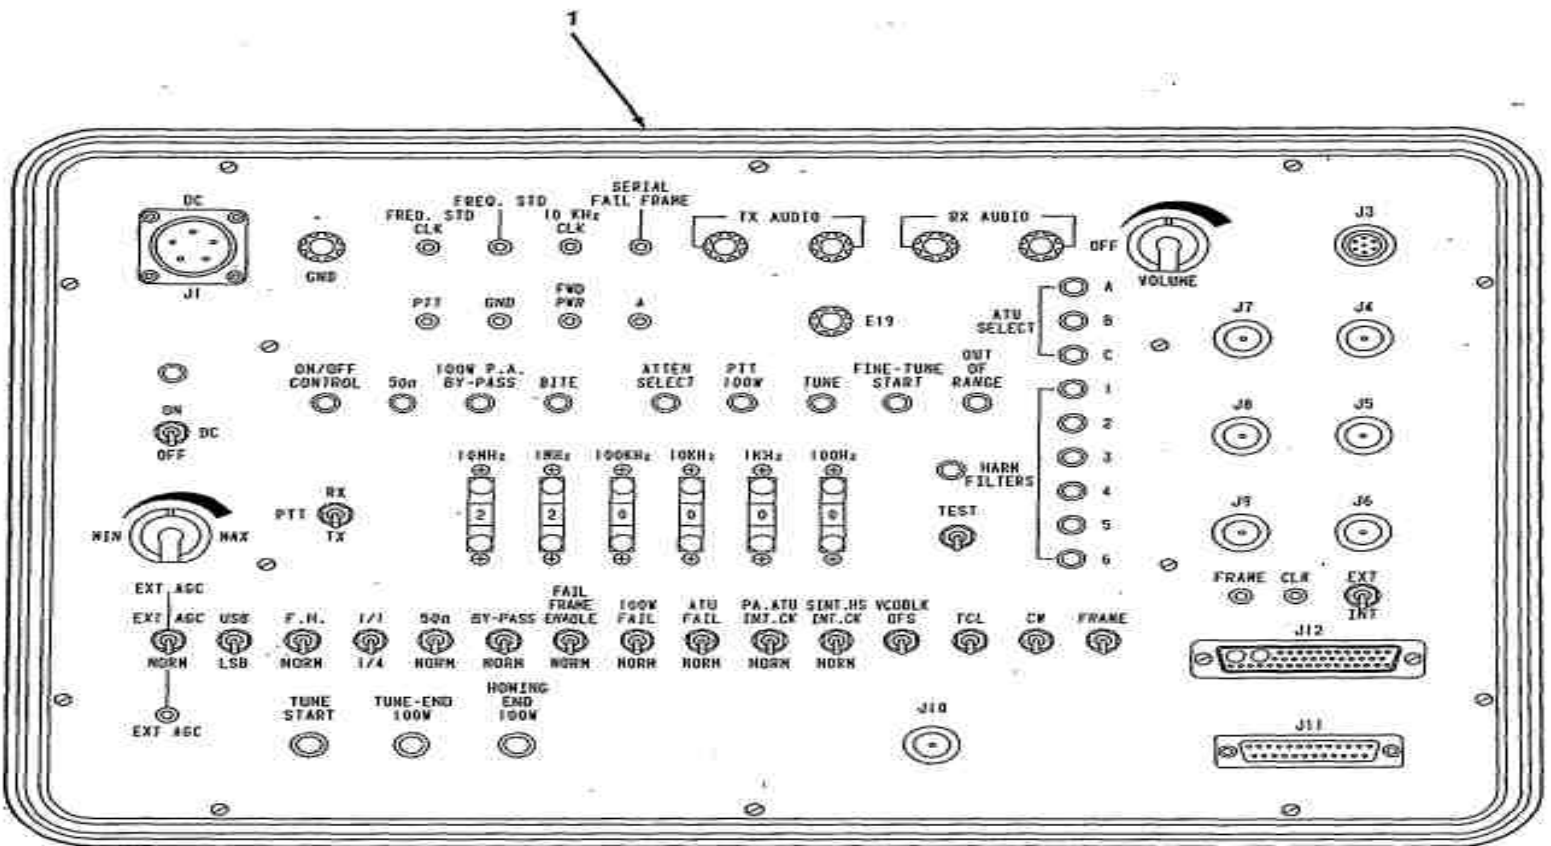

CEONL-072

FIGURE 38 Special Tools List

(1)	(2)	(3)	(4)	(5)	(6)
ITEM NO	SMR CODE	CAGEC	PART NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
				GROUP 20 SPECIAL TOOLS LIST	
				FIG.38	
1	PEHHD	80058	TS-4255/GRC-215	TEST SET,MANPACK (SEE TM11-6625-3213-14&P FOR PARTS BREAKDOWN) BOI:1 PER 1-5 END ITEMS	
				END OF FIGURE	

Section IV

CROSS-REFERENCE INDEXES

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM
5905-00-004-6121	37	47
5910-00-010-8666	15	24
	19	10
	21	17
	24	9
	30	3
	34	108
	36	18
	37	9
5910-00-010-8715	29	3
5910-00-010-8717	6	3
	7	5
	14	4
	16	2
	19	12
	21	30
	27	3
	29	2
	30	7
	32	31
	34	45
	34	82
	34	109
	36	17
	37	11
5910-00-010-8721	6	8
5999-00-021-2119	8	82
5950-00-031-3779	13	5
5950-00-031-4557	6	20
	7	10
	30	26
5950-00-031-4560	30	27

5950-00-031-4561	6	19
	24	34
5950-00-035-4413	6	25
5950-00-035-4416	24	27
	25	15
	26	16
	27	13
5950-00-035-4418	14	14
	24	33
5950-00-035-4425	6	24
	18	1
5310-00-052-6742	5	22
	≥8	5
5305-00-054-5635	15	4
5305-00-054-5636	5	15
5305-00-054-5637	5	23
	8	25
	15	20
5305-00-054-5638	8	24
5305-00-054-5639	15	1
	21	41
5305-00-054-5640	5	42
5305-00-054-5642	5	11
5305-00-054-5643	23	14
5305-00-054-5647	5	8
	8	11
5305-00-054-5651	8	40
5910-00-098-8670	7	7
	30	8
5910-00-098-9234	30	17
5905-00-104-8366	6	45
5905-00-106-3667	6	48
5905-00-106-3668	14	17
5905-00-106-9357	6	40

	14	21
5905-00-111-4750	6	44
5905-00-111-4852	30	47
5910-00-113-5276	13	3
	30	9
5910-00-113-5277	6	9
5910-00-113-5278	27	4
5910-00-113-5445	27	6
	30	6
5910-00-113-5465	16	3
	19	16
	34	57
5910-00-113-5471	34	44
5910-00-113-9448	30	16
5910-00-113-9453	26	3
5905-00-119-8811	6	42
5910-00-124-0659	7	6
	13	2
	14	8
	19	9
	20	3
	24	6
	29	4
	30	4
	36	15
	37	13
5999-00-130-1746	17	67
5905-00-133-0382	6	36
5905-00-135-3971	29	15
5905-00-135-3972	14	20
5961-00-136-3909	19	25
5905-00-141-0742	6	50
5905-00-141-1183	7	33
5910-00-156-5999	30	5

5930-00-163-4036	5	46
5961-00-163-7231	17	4
	34	43
	34	107
5950-00-170-9770	30	28
5961-00-170-9786	24	40
	27	15
5950-00-171-0066	17	24
5962-00-172-8261	34	93
5905-00-177-7486	19	44
	24	48
	32	15
5905-00-180-8301	7	26
	24	62
	25	24
	26	25
	27	19
	29	19
	32	94
	34	21
	34	48
	34	63
	34	117
5905-00-180-8303	24	45
	30	41
	37	41
5905-00-180-8313	19	29
5905-00-180-8314	6	32
	7	14
	13	13
	17	31
	20	8
	24	50
	32	112

	34	69
	36	27
	36	44
	36	55
	36	81
5905-00-180-8315	6	34
5905-00-195-4074	36	64
5905-00-197-0219	24	65
	34	18
	34	37
5905-00-197-0221	24	52
	27	22
	34	19
5905-00-197-0223	17	36
	24	61
	26	28
5905-00-197-0224	17	38
	19	35
	34	64
	34	88
5905-00-232-3113	19	42
5961-00-232-3279	14	3
5999-00-237-4054	5	70
	8	80
5905-00-255-3699	6	41
	24	59
	29	20
5905-00-255-3700	17	35
5950-00-325-6462	13	6
5962-00-365-5536	32	57
	34	79
5962-00-369-9839	29	30
5950-00-377-9882	6	18
	32	10

	32	74
5905-00-401-7424	7	31
	19	40
	30	37
	37	44
5905-00-401-7426	19	50
	34	116
5905-00-401-7427	13	10
	30	40
5905-00-401-7428	30	42
5905-00-401-7429	24	53
	27	23
	32	56
	34	112
5905-00-401-7430	30	48
5905-00-401-7431	6	35
	37	37
5935-00-402-1519	8	43
	8	81
5905-00-403-8837	30	39
	34	35
	36	82
5905-00-407-0082	37	22
5905-00-407-0083	32	67
	32	79
	37	25
5905-00-407-0084	34	39
	37	35
5905-00-407-0085	32	65
	32	78
5905-00-407-0086	32	114
5905-00-407-0089	37	34
5905-00-411-1851	7	27
	24	49

	32	53
	37	46
5905-00-412-0758	6	30
	24	56
	25	22
	26	24
	30	32
	32	13
	34	87
	37	51
5905-00-412-0759	30	33
	32	54
	34	98
	36	71
5905-00-412-0760	34	100
5905-00-412-3776	7	25
5905-00-412-4045	37	30
5905-00-413-1200	7	16
	24	54
	27	24
	32	111
	34	68
	36	25
	36	57
	36	101
	37	40
5905-00-421-8918	19	48
	20	7
	30	34
	34	36
	34	114
5905-00-422-3798	6	39
5910-00-426-0330	19	11
5962-00-429-5638	19	54

5905-00-431-7833	14	15
5905-00-432-0404	37	50
5905-00-432-6389	37	42
5905-00-433-1853	7	17
	19	33
	26	27
	27	20
5905-00-433-6482	37	31
5905-00-433-6483	37	24
5905-00-433-6486	13	11
	37	38
5961-00-434-2799	19	1
5935-00-448-9337	22	9
5305-00-455-2508	5	4
5905-00-458-4406	6	51
5905-00-458-9346	7	24
	17	28
	29	16
	30	38
	32	52
	34	22
	34	38
	34	118
	36	26
	36	62
	36	70
	36	80
	36	103
5905-00-458-9347	32	80
5905-00-458-9348	30	35
5905-00-458-9349	25	25
	27	27
5905-00-458-9500	7	20
	8	85

	13	12
	16	7
	17	37
	19	31
	21	34
	24	58
	27	16
	30	44
	34	25
	34	50
	34	90
	37	21
5340-00-462-4226	5	84
	8	71
5905-00-466-1215	7	21
	17	29
	30	36
	34	40
5905-00-466-1216	36	22
5905-00-466-1218	7	22
	17	30
	24	63
5905-00-466-1219	37	26
5905-00-466-1416	34	49
5910-00-467-1725	19	8
	34	74
	36	34
	36	115
5905-00-469-7358	32	107
5905-00-470-0369	7	34
5905-00-470-0369	24	46
	25	21
	26	22
	27	26

5905-00-470-0370	7	18
	13	14
	17	33
	30	46
	34	23
	34	67
	34	113
5905-00-470-1319	7	30
	37	32
5905-00-470-9163	25	20
	26	20
	37	36
5905-00-470-9480	14	22
5905-00-470-9481	19	41
	30	43
	34	24
	34	91
5905-00-471-2226	37	29
5905-00-471-2227	37	39
5905-00-471-4621	32	95
5905-00-471-4622	27	29
	32	97
5905-00-471-4797	25	23
	26	23
	37	28
5905-00-479-6633	14	24
	24	51
	27	28
	32	38
	32	55
	32	96
	37	45
5905-00-479-6658	24	60
5905-00-480-0013	26	26

	32	108
	34	66
5905-00-481-0961	6	49
	37	52
5905-00-481-5255	32	14
5905-00-482-7695	14	18
	19	36
	24	44
	37	33
5905-00-484-7550	29	17
5961-00-484-7740	7	13
	17	25
5961-00-484-7740	19	27
	20	5
	34	33
	34	60
	36	20
	36	53
	36	99
	37	17
5950-00-488-3056	30	29
5905-00-488-3259	37	48
5905-00-489-7703	27	21
	36	28
5905-00-491-6344	17	27
	36	24
5905-00-492-2022	32	66
5905-00-493-5249	34	20
	36	23
5305-00-494-7333	3	7
5305-00-494-7334	5	65
5910-00-495-0042	37	10
5961-00-496-7906	13	1
	19	3

	25	2
	26	2
	27	2
	29	1
	37	1
5930-00-498-5443	21	35
5961-00-501-1013	32	64
	32	76
5935-00-530-4650	37	16
5310-00-543-4652	5	18
5905-00-588-9401	14	16
5905-00-617-5089	6	31
	19	38
	24	55
	25	19
	26	21
	27	25
5905-00-617-5090	19	49
	37	27
5905-00-617-5093	24	57
	29	21
	32	110
	34	34
	34	101
	34	119
	36	58
5905-00-617-5096	19	46
	34	89
5340-00-631-7894	8	57
5905-00-689-1290	7	23
	14	23
	17	34
	19	34
	24	64

	30	45
	32	11
	32	81
	37	20
5310-00-720-6591	8	63
	15	40
5340-00-721-6936	8	72
5340-00-721-7653	3	24
5305-00-763-6009	5	40
	8	38
5305-00-764-2966	8	1
5305-00-770-2579	8	30
5310-00-776-2212	8	68
5960-00-791-1601	20	9
5930-00-803-4570	15	15
5310-00-827-9286	8	59
5999-00-830-4757	5	36
5945-00-879-9494	22	4
5365-00-900-1803	3	5
5310-00-902-3950	8	19
5961-00-905-4815	30	30
5905-00-935-8539	37	43
5940-00-951-3920	30	51
5961-00-951-8757	24	43
	30	31
	37	18
5961-00-957-6865	16	1
	20	1
	21	29
	37	2
5961-00-965-9594	22	1
5340-00-985-6633	8	31
5935-00-997-8026	5	52
	5	88

5910-01-011-8993	32	34
5935-01-017-5018	6	17
	9	18
	14	12
	17	18
5962-01-033-2283	29	25
5910-01-034-2592	30	14
	34	83
5910-01-034-2593	37	14
5905-01-035-5065	7	15
5905-01-035-5065	14	19
	17	32
	19	30
	20	6
	24	47
	27	18
	29	18
	32	16
	34	41
	34	65
	34	86
	34	99
	36	45
	36	56
	36	63
	36	72
	36	102
	37	23
5961-01-047-7473	7	12
	19	26
	32	77
	34	61
	36	21
	36	54

	36	100
5962-01-049-0349	19	53
	37	53
5935-01-053-4041	12	23
	17	19
	24	24
	30	24
5950-01-059-4185	19	24
5935-01-062-2405	5	72
	8	78
5961-01-067-3033	17	2
	34	9
5961-01-067-9799	30	2
5905-01-076-9381	6	47
5935-01-080-1651	24	23
5935-01-080-3269	8	79
5950-01-083-7915	19	23
5950-01-089-6511	19	21
5962-01-099-8505	30	55
5962-01-101-3737	37	54
5962-01-103-7367	29	22
6625-01-104-6136	25	27
	26	30
	27	33
5905-01-106-5201	19	37
5962-01-109-4231	36	37
5950-01-118-3697	19	22
5910-01-119-4302	19	6
5962-01-124-4915	29	23
5961-01-131-6908	11	1
	12	1
	19	2
	22	2
5962-01-131-7815	29	31

5905-01-138-6236	19	32
5962-01-140-5618	7	36
	29	29
5910-01-155-4634	34	55
5905-01-157-0503	19	45
5910-01-162-4912	11	7
	12	10
5910-01-162-4916	11	27
	12	21
5910-01-162-4917	11	19
	12	11
5910-01-162-4922	11	26
5962-01-164-5092	29	27
5962-01-164-8741	7	35
5905-01-169-9933	34	115
5945-01-171-6560	11	29
	12	24
5905-01-175-0173	19	43
5905-01-176-5020	7	29
	19	47
5910-01-180-5666	25	9
	27	7
5905-01-184-3510	13	9
5905-01-185-0555	7	19
5905-01-185-5239	32	12
5895-01-185-5408	24	35
5950-01-187-1714	25	14
	26	15
5961-01-187-8836	19	28
5307-01-187-8960	5	61
5307-01-190-3011	8	60
5910-01-190-5257	12	17
5307-01-194-3198	8	58
	15	41

5999-01-194-9729	6	65
	8	88
	19	55
5962-01-195-4644	36	36
	36	47
	36	66
	36	83
	36	118
5999-01-199-9123	34	29
5999-01-200-4115	37	62
5895-01-205-0947	4	2
5895-01-205-6175	4	8
5895-01-205-6180	1	1
5895-01-205-6183	4	9
5905-01-206-4288	6	46
	19	39
5895-01-207-8990	4	10
5961-01-212-9328	25	1
	26	1
	30	1
5962-01-213-0829	36	46
	36	73
	36	84
	36	96
	36	112
5307-01-213-9663	5	56
	8	62
5961-01-214-2382	24	42
	32	102
	34	78
	36	40
5961-01-218-4118	27	1
5895-01-237-4742	32	92
5962-01-238-8470	24	68

5962-01-239-6614	37	56
5962-01-240-5627	30	54
5935-01-241-7224	14	28
5920-01-252-7776	30	19
5305-01-258-6181	5	6
5962-01-263-5734	30	53
6625-01-267-4402	38	1
5961-01-273-3054	8	83
5940-01-274-2430	5	25
	8	2
	15	11
5340-01-276-1804	5	55
5895-01-276-7835	4	7
5999-01-276-7858	5	14
5999-01-276-7859	10	10
5999-01-276-7860	10	12
5999-01-276-7861	10	11
5999-01-276-7862	15	25
5999-01-276-9425	8	37
5999-01-276-9428	8	33
5999-01-277-2681	18	4
5999-01-277-2682	8	7
5999-01-277-2684	23	16
5999-01-277-2685	23	15
5999-01-277-2686	31	9
5999-01-277-2687	32	1
5940-01-277-3793	8	56
5905-01-291-3983	30	49
6150-01-328-5675	6	66
	8	42
	24	89
6150-01-329-1523	5	69
6150-01-329-1524	6	70
	14	29

PART NUMBER INDEX

CAGEC	PART NUMBER	STOCK NUMBER	FIG.	ITEM
29990	ATC100A120JC100X		14	9
29990	ATC100A150JC50X		25	11
			27	9
29990	ATC100A160FC50X		6	13
			9	5
29990	ATC100A2R7B500X		14	6
29990	ATC100A200JC50X		24	20
			28	2
29990	ATC100A220JC50X		26	9
			28	3
29990	ATC100A240FC50X		9	12
			24	12
			25	13
			26	10
29990	ATC100A270JC50X		28	1
29990	ATC100A3R3D50X		26	11
29990	ATC100A3R9DC50X		28	8
29990	ATC100A300FC50X		24	18
29990	ATC100A320F50X		6	12
			9	16
29990	ATC100A330JC50X		24	16
			28	5
29990	ATC100A360JC50X		9	14
			24	19
29990	ATC100A390JC50X		28	9
29990	ATC100A430FC50X		9	11
			24	17
29990	ATC100A470JC50X		17	9
			25	5
			26	13
			27	5
			28	7
29990	ATC100A5R1CC50X	5910-01-180-5666	25	9

			27	7
29990	ATC100A510FC50X		24	15
29990	ATC100A6R8CC50X		27	8
			28	4
29990	ATC100A680F50X		9	9
29990	ATC100A750JC50X		24	11
29990	ATC100A8R2CC50X		24	14
			28	6
29990	ATC100A9R1BC50X		9	2
			24	10
29990	ATC100B100FC500X	5910-01-162-4922	11	26
29990	ATC100B101FC500X	5910-01-162-4912	11	7
			12	10
29990	ATC100B111FC300X		11	23
29990	ATC100B131FC300X		11	20
			12	2
29990	ATC100B150FC500X		11	25
			12	15
29990	ATC100B151FC300X		11	15
29990	ATC100B160FC500X	5910-01-162-4916	11	27
			12	21
29990	ATC100B161FC300X		11	17
			12	12
29990	ATC100B181FC300X		11	24
29990	ATC100B201FC300X		11	16
			12	5
29990	ATC100B220FC500X		12	20
29990	ATC100B221FC200X		11	12
			12	4
29990	ATC100B222FC200X		11	4
29990	ATC100B240FC500X	5910-01-190-5257	12	17
29990	ATC100B270FC500X		12	22
29990	ATC100B301FC200X		11	2
			12	8

29990	ATC100B331FC200X		11	3
			12	7
29990	ATC100B360FC200X		11	9
			12	6
29990	ATC100B360FC500X		11	21
			12	19
29990	ATC100B390FC500X		12	13
29990	ATC100B391FC200X		11	11
			12	9
29990	ATC100B430FC500X		11	14
			12	14
29990	ATC100B431FC200X		11	8
29990	ATC100B470FC500X		12	18
29990	ATC100B471FC200X		11	18
29990	ATC100B471KC200X		14	7
29990	ATC100B5R1BC500X		11	22
29990	ATC100B560FC500X		11	10
29990	ATC100B620FC500X	5910-01-162-4917	11	19
			12	11
29990	ATC100B680FC500X		11	28
			12	16
29990	ATC100B820FC500X		11	13
			12	3
29990	ATC100B910FC500X		11	5
29990	ATC100B911FC200X		11	6
29990	ATC200B103KC50X		24	21
29990	ATC200B104NC50X		24	5
			27	12
			29	6
29990	ATC200B223KC50X		25	6
			26	5
29990	ATC200B393KC50X		25	8
			26	6
29990	ATC200B473KC50X		25	4

			26	4
29990	ATC200B822KC50X		25	7
			26	7
29990	ATC700A101FC50X		9	4
29990	ATC700A102FC50X		9	8
			24	4
			25	10
			26	8
			27	10
29990	ATC700A102KC50X		32	8
			32	48
			32	60
			32	71
29990	ATC700A111FC50X		9	6
29990	ATC700A121JC50X		17	14
			30	15
29990	ATC700A201FC50X		24	13
29990	ATC700A271FC50X		9	7
29990	ATC700A331JC50X		26	14
29990	ATC700A681FC50X		9	15
29990	ATC700A821FC50X		9	13
29990	ATC700A911FC50X		9	10
80063	A3023805	5895-01-205-6180	1	1
80063	A3026000		4	11
80063	A3026001		2	3
80063	A3026002	5895-01-276-7835	4	7
80063	A3026003		4	4
80063	A3026004	5895-01-207-8990	4	10
80063	A3026005	5895-01-205-6183	4	9
80063	A3026006	5895-01-205-6175	4	8
80063	A3026007	5895-01-205-0947	4	2
80063	A3026302		10	3
80063	A3026580		11	40
			12	34

;80063	A3026714-2		6	7
80063	A3026715-4		6	4
80063	A3026718-13		6	6
80063	A3026718-23		6	5
80063	A3026718-28		36	77
80063	A3026726-1		6	22
80063	A3026757-43		5	49
			5	85
80063	A3026769		20	10
80063	A3026792		6	28
80063	A3026845-4		21	13
80063	A3026852-3		21	21
80063	A3026860-2		15	27
80063	A3026869-1		5	62
80063	A3026869-2		15	18
80063	A3026869-8		15	9
80063	A3026906-2		5	19
80063	A3026908-1		5	43
80063	A3026908-3		5	7
80063	A3026908-4	5940-01-274-2430	5	25
			8	2
			15	11
80063	A3026908-5		6	62
80063	A3026911	5940-01-277-3793	8	56
80063	A3026935		30	18
80063	A3026941-1	6150-01-329-1524	6	70
			14	29
80063	A3026941-10		24	90
80063	A3026941-2	6150-01-329-1523	5	69
80063	A3026941-3	6150-01-328-5675	6	66
			8	42
			24	89
80063	A3026951-1		6	63
80063	A3027002		21	4

80063	A3027003-3		15	28
80063	A3027004-1		15	14
80063	A3027006-1		15	19
80063	A3027006-2		15	17
80063	A3027007-1		23	8
80063	A3027026-1		5	66
80063	A3027026-2		3	8
80063	A3027031-4		4	17
80063	A3027056-1		5	82
			8	91
80063	A3027057-1		21	5
80063	A3027066-1		34	26
80063	A3027250-1		37	49
80063	A3027322		5	26
80063	A3027323		8	23
80063	A3027330		36	3
80063	A3027331		36	2
80063	A3027332		36	1
80063	A3027333		36	9
80063	A3027334		36	5
80063	A3027336		34	8
80063	A3027338		34	5
80063	A3027340		36	4
80063	A3027342		34	3
80063	A3027344	5999-01-276-7858	5	14
80063	A3027346	5999-01-276-9428	8	33
80063	A3027348		35	1
80063	A3027350		33	1
80063	A3027352	5999-01-276-9425	8	37
80063	A3027353		8	35
80063	A3027354		5	2
80063	A3027355-1		5	67
80063	A3027355-2		5	64
80063	A3027356		5	10

80063	A3027357		3	1
80063	A3027358		35	3
80063	A3027359		35	2
80063	A3027360		33	3
80063	A3027361		33	2
80063	A3027362		5	58
80063	A3027501-10		6	2
80063	A3027542-2		15	26
80063	A3027572-1		21	16
80063	A3027649-1		20	12
80063	A3027653		8	20
80063	A3027654	5999-01-277-2681	18	4
80063	A3027655	5999-01-276-7859	10	10
80063	A3027656		10	8
80063	A3027658		8	27
80063	A3027659	5999-01-276-7861	10	11
80063	A3027660	5999-01-276-7860	10	12
80063	A3027661	5999-01-276-7862	15	25
80063	A3027662	5999-01-277-2687	32	1
80063	A3027663		32	5
80063	A3027664		32	2
80063	A3027665		32	7
80063	A3027666		32	3
80063	A3027667		32	4
80063	A3027669		34	1
80063	A3027670		34	2
80063	A3027671		34	7
80063	A3027672		8	17
80063	A3027673	5999-01-277-2686	31	9
80063	A3027674		36	6
80063	A3027675		36	8
80063	A3027676		36	10
80063	A3027677		36	7
80063	A3027678		36	11

80063	A3027679		9	27
80063	A3027680		32	6
80063	A3027682		34	4
80063	A3027685	5999-01-277-2682	8	7
80063	A3027687	5999-01-277-2684	23	16
80063	A3027688	5999-01-277-2685	23	15
80063	A3027689		15	16
80063	A3027693		6	69
80063	A3027694		21	22
80063	A3027695		9	28
80063	A3027696-1		22	11
80063	A3027696-2		22	8
80063	A3027698		23	1
80063	A3027699		29	32
80063	A3027700		17	50
80063	A3027701		17	51
80063	A3027702		17	49
80063	A3027708		21	9
80063	A3027709		21	7
80063	A3027710		21	11
80063	A3027711		21	3
80063	A3027712		21	1
80065	A3027713		21	8
80063	A3027714		21	23
80063	A3027716		15	31
80063	A3027717		15	49
80063	A3027718		15	45
80063	A3027719		15	46
80063	A3027720		17	56
80063	A3027721		4	19
80063	A3027724	5340-01-276-1804	5	55
80063	A3027725		21	14
80063	A3027726		15	30
80063	A3027727-1	5305-01-258-6181	5	6

80063	A3027728		37	59
80063	A3027729		8	50
80063	A3027730		5	33
80063	A3027731		8	9
80063	A3027732-1		8	29
80063	A3027734-1		5	5
80063	A3027735		11	41
			12	33
80063	A3027736		3	3
80063	A3027737-1		23	3
80063	A3027738		5	81
80063	A3027740		3	4
80063	A3027743		17	65
80063	A3027744-2		21	2
80063	A3027745		5	16
80063	A3027747-1		5	79
80063	A3027747-2		5	37
80063	A3027749		8	3
80063	A3027754		8	10
80063	A3027755		15	8
80063	A3027756		8	90
80063	A3027757		5	80
80063	A3027760		9	29
80063	A3027765		15	6
			21	42
80063	A3027766		5	45
80063	A3027768		32	19
80063	A3027769		32	25
80063	A3027770		32	23
80063	A3027771		9	36
80063	A3027772		9	34
80063	A3027773		9	35
80063	A3027774		9	30
80063	A3027775		9	32

80063	A3027776		15	43
80063	A3027777		5	83
80063	A3027778		8	93
80063	A3027780		8	74
80063	A3027781		3	11
80063	A3027782		24	75
80063	A3027783		30	59
80063	A3027784		32	29
			34	28
			36	29
80063	A3027785		8	66
80063	A3027787		37	58
80063	A3027788		8	45
80063	A3027792		18	10
80063	A3027793		6	71
80063	A3027796		15	34
80063	A3027797		9	33
80063	A3027798		22	5
80063	A3027799		22	12
80063	A3027801		15	35
80063	A3027804		10	19
80063	A3027805		15	5
80063	A3027806		5	39
80063	A3027809		5	63
80063	A3027810		4	14
			5	41
80063	A3027812		4	15
80063	A3027816		15	47
80063	A3027817		5	27
80063	A3027818		8	92
80063	A3027820-3		5	54
80063	A3027820-4		5	53
80063	A3027821		8	76
80063	A3027823		5	30

80063	A3027824		5	29
80063	A3027825		10	17
80063	A3027826		8	28
80063	A3027828		20	13
			22	7
80063	A3027831		5	78
80063	A3027832		5	77
80063	A3027833		5	76
80063	A3027838-1		4	16
80063	A3027839		15	39
80063	A3027843		8	47
80063	A3027852		31	7
80063	A3027859		31	2
			33	4
			35	6
80063	A3027862		5	34
80063	A3027863		23	12
80063	A3027865		23	5
80063	A3027866		23	11
80063	A3027870		17	55
80063	A3027871		5	60
80063	A3027872-1		5	59
80063	A3027873		8	36
80063	A3027874		31	10
80063	A3027875		3	12
80063	A3027879		21	24
80063	A3027880		8	73
80063	A3027882		15	50
80063	A3027883		15	51
80063	A3027884		8	21
80063	A3027885		6	64
80063	A3027887		18	12
80063	A3027888		10	18
80063	A3027889		31	1

80063	A3027890		18	9
80063	A3027891		18	11
80063	A3027893		10	16
80063	A3027894		10	14
80063	A3027895		8	44
80063	A3027896		5	35
80063	A3027897		18	13
80063	A3027898		6	67
80063	A3027899		11	37
			12	37
80063	A3027900		11	42
			12	35
80063	A3027901		11	38
			12	32
80063	A3027902		11	39
			12	31
80063	A3027903		3	17
80063	A3027911		22	10
80063	A3027916		21	44
80063	A3027917		15	38
80063	A3027922		15	33
80063	A3027923		15	48
80063	A3027924		15	52
80063	A3027927		15	44
80063	A3027928		10	15
80063	A3027937		4	12
80063	A3027947		15	21
80063	A3027948		15	7
80063	A3027949		8	67
80063	A3027950		18	5
80063	A3027951		10	4
80063	A3027952		8	65
80063	A3027953		22	3
80063	A3027954		4	13

80063	A3027955		8	18
80063	A3027956		8	49
80063	A3027957		5	38
80063	A3027958		5	48
80063	A3027967		15	29
80063	A3027968		15	36
80063	A3027969		15	32
80063	A3027972		17	53
80063	A3027973		18	7
80063	A3027974		10	7
80063	A3027975		6	61
80063	A3027976		8	46
80063	A3030083-1		6	33
80063	A3030084-82		9	3
80063	A3030084-83		6	11
80063	A3030088-2		6	10
80063	A3030092		14	25
80063	A3030093		8	75
80063	A3030094		6	52
80063	A3030095		6	53
80063	A3030096		6	54
80063	A3030097		6	55
80063	A3030098		6	56
80063	A3030099		6	57
80063	A3030100		6	58
80063	A3030101		19	51
80063	A3030102		34	51
80063	A3030103		34	52
80063	A3030104		34	120
80063	A3030105		32	40
80063	A3030106		32	41
80063	A3030107		32	42
80063	A3030108		32	68
80063	A3030109		32	69

80063	A3030110		32	82
80063	A3030114		16	6
			21	33
80063	A3030115		14	13
80063	A3030116		9	22
80063	A3030117		9	23
80063	A3030118		9	24
80063	A3030119		9	20
80063	A3030120		9	19
80063	A3030121		12	29
80063	A3030122		11	35
80063	A3030123		12	30
80063	A3030124		11	36
			12	27
80063	A3030125		19	20
80063	A3030126		19	19
80063	A3030127		32	35
80063	A3030128		32	84
80063	A3030129		32	91
80063	A3030130		11	33
			12	28
80063	A3030131		11	34
80063	A3030132		12	25
80063	A3030133		11	30
			12	26
80063	A3030134		11	31
80063	A3030135		11	32
80063	A3030136		6	23
80063	A3030141		9	21
80063	A3030142		24	66
			27	31
80063	A3030146		25	16
80063	A3030147		24	28
80063	A3030148		24	30

80063	A3030149		24	29
80063	A3030150		24	31
			28	11
80063	A3030151		8	32
80063	A3030152		8	39
80063	A3030153-1		5	32
80063	A3030157		21	32
80063	A3030158-1		7	9
80063	A3030158-2		5	73
80063	A3030166		6	16
80063	A3030169		9	17
80063	A3030170		15	22
80063	A3030171		21	18
80063	A3030174	5895-01-185-5408	24	35
80063	A3030185		6	26
80063	A3030189		6	27
80063	A3030201-1		19	52
80063	A3030201-2		6	59
80063	A3030202-1		6	60
80063	A3030224-101		17	39
80063	A3030228		31	5
80063	A3030230-3		18	8
80063	A3030231		8	15
80063	A3030232		34	15
80063	A3030233		34	6
80063	A3030510		5	47
80063	A3030593		16	9
80063	A3030708-10		24	97
80063	A3030708-11		24	95
80063	A3030708-12		24	96
80063	A3030708-13		24	81
80063	A3030708-14		24	79
80063	A3030708-15		32	27
80063	A3030708-16		32	26

80063	A3030708-17		32	28
80063	A3030708-18		24	93
80063	A3030708-4		32	99
80063	A3030708-5		24	92
80063	A3030708-6		24	91
80063	A3030708-7		24	94
80063	A3030708-9		24	100
80063	A3030719		6	29
80063	A3.030740		9	25
80063	A3030741		14	27
80063	A3030744-1		14	5
80063	A3030752		24	87
80063	A3030753		24	86
80063	A3030754		24	85
80063	A3030757		24	71
80063	A3030769		24	76
80063	A3030770		24	70
80063	A3030859		34	13
80063	A3030873		17	40
80063	A3030885		17	58
80063	A3030895		17	57
80063	A3030901		8	70
80063	A3030910		28	10
80063	A3030911		24	73
80063	A3030915		25	17
80063	A3030943		8	14
80063	A3030947		4	18
80063	A3031038-15		34	27
80063	A3031038-184		3	13
80063	A3031038-185		6	68
80063	A3031038-186		7	37
80063	A3031038-187		5	21
80063	A3031038-188		21	'25
80063	A3031038-189		15	23

80063	A3031038-19		29	34
80063	A3031038-190		10	5
80063	A3031038-191		33	5
80063	A3031038-192		31	3
80063	A3031038-193		35	5
80063	A3031038-194		32	24
80063	A3031038-195		18	3
80063	A3031038-196		19	17
80063	A3031038-197		9	26
80063	A3031038-198		12	36
80063	A3031038-199		13	15
80063	A3031038-20		17	47
80063	A3031038-200		14	26
80063	A3031038-201		11	43
80063	A3031038-202		16	8
80063	A3031038-203		21	36
80063	A3031038-204		8	52
80063	A3031038-205		8	86
80063	A3031038-206		23	4
80063	A3031038-208		26	35
80063	A3031038-209		27	38
80063	A3031038-21		30	58
80063	A3031038-210		4	5
80063	A3031038-211		4	6
80063	A3031038-212		4	1
80063	A3031038-213		22	6
80063	A3031038-214		37	57
80063	A3031038-215		20	11
80063	A3031038-58		24	69
80063	A3031038-59		9	31
80063	A3031038-60		36	30
80063	A3031041		7	38
80063	A3031083		32	85
80063	A3031086		32	83

80063	A3031087		5	1
			5	75
80063	A3031095		5	51
			5	87
80063	A3031096		5	50
			5	86
80063	A3031097		5	28
80063	A3031107		8	41
80063	A3031111		23	17
80063	A3031138		21	26
80063	A3031162		23	18
80063	A3031164-1		24	77
			29	33
80063	A3031164-2		24	80
			29	35
80063	A3031164-3		24	88
			29	37
80063	A3031164-4		24	84
			29	36
80063	A3031165		24	83
80063	A3031166		24	99
80063	A3031167		24	98
80063	A3031168		24	1
80063	A3031169		24	2
80063	A3031170		24	3
80063	A3031172		25	29
80063	A3031173		25	28
80063	A3031176		26	33
80063	A3031177		26	31
80063	A3031180		27	37
80063	A3031182		27	36
80063	A3031184		24	22
80063	A3031185		28	13
80063	A3031186		28	12

80063	A3031188		24	32
80063	A3031189		25	30
			26	32
			27	34
80063	A3031241		30	62
80063	A3031242		30	60
80063	A3031245		10	9
80063	A3031250		27	35
80063	A3031258		23	7
80063	A3031291		32	21
80063	A3031292		32	22
80063	A3031293		32	17
80063	A3031294		32	18
80063	A3031304		8	53
80063	A3031305		8	22
80063	A3031306		8	54
80063	A3031307		10	6
80063	A3031308		10	13
80063	A3031308-207		25	32
80063	A3031334-2		8	61
80063	A3031337		6	21
80063	A3031341		2	2
80063	A3031356		18	2
80063	A3031401-3		5	17
80063	A3031410		8	8
80063	A3031411		3	20
80063	A3031412		3	21
80063	A3031413		3	18
80063	A3031414		3	16
80063	A3031415		3	19
80063	A3031416		31	8
			32	20
80063	A3031417		3	15
80063	A3031420		3	10

80063	A3031421		3	23
80063	A3031423		3	22
80063	A3031430		5	57
80063	A3031431		21	28
80063	A3031464-1		17	66
80063	A3031464-2		17	64
80063	A3031464-3		17	63
80063	A3031464-4		17	61
80063	A3031464-5		17	59
80063	A3031464-6		17	52
80063	A3031464-7		17	54
80063	A3031464-8		17	48
80063	A3031464-9		17	62
80063	A3031466-10		36	106
80063	A3031466-II		32	43
80063	A3031466-12		32	87
80063	A3031466-13		36	75
80063	A3031466-14		36	49
80063	A3031466-15		34	122
80063	A3031466-16		36	67
80063	A3031466-17		32	59
80063	A3031466-18		36	85
80063	A3031466-8		34	104
80063	A3031470		5	3
80063	A3031498		3	2
80063	A3031504		27	30
80063	A3031505		26	18
80063	A3031506		26	17
80063	A3031507		17	13
80063	A3031526		37	19
80063	A3031552		24	72
80063	A3031553		24	74
80063	A3031554		24	82
80063	A3031556		17	15

80063	A3031562		7	28
80063	A3031563		32	98
80063	A3031584		32	88
80063	A3034571-1		5	20
			23	6
80063	A3034571-2		8	55
			10	2
			25	31
			26	34
			27	39
			31	4
			33	6
			35	4
80063	A3034571-3		4	3
80063	A3034572		3	14
80063	A3078271-3		2	1
04713	BAV70		7	2
			17	1
			34	11
			36	14
			36	31
			36	86
			36	107
04713	BAV99		7	3
			32	105
			34	105
04713	BAW56		17	3
			19	4
			34	10
			36	12
			36	32
			36	87
			36	108
15238	BB221	5961-01-218-4118	27	1

25088	B1C90/20	5960-00-791-1601	20	9
80063	C-11670/G		1	2
02735	CD4011BK3	5962-01-213-0829	36	46
			36	73
			36	84
			36	96
			36	112
02735	CD4015BF/3	5962-01-103-7367	29	22
18714	CD4016BK		32	104
02735	CD4027BK3		34	102
			36	74
			36	95
27014	CD4046BMJ-MIL	5962-01-099-8505	30	55
18714	CD409SBK		36	94
			36	113
			36	119
18714	CD4508BF/3		29	24
80063	CLR65BB560KGL		15	10
			19	15
			21	31
80063	CLR65BC470KGL		19	14
81349	CLR65BD330KGL		19	13
80063	CLR65BH100KGL		19	7
80063	CM04FD910G03		6	15
80063	CV36A090		32	89
			2	90
81349	CV36A250		32	72
16546	C102K1005XFPB		17	16
			32	32
			36	92
			7	7
16546	C103K1005XHPB		17	12
			32	49
16546	C103K1210XFPB		34	12

			34	96
16546	C152K1005XFPB		17	10
			37	15
16546	C220J1005CFPB		17	6
16546	C390J1005CFPB		17	5
16546	C479J1005CFPB		32	33
			32	62
16546	C560J1005CFPB		17	7
			34	72
88818	C605006182	5910-00-426-0330	19	11
16546	C680J1005CFPB		17	11
16546	C829J1005CFPB		17	8
71468	DBMY25S0L3		17	17
71468	DDMY-36W4S		8	26
			8	77
50021	DL233	6625-01-104-6136	25	27
			26	30
			27	33
61306	DM5CC030D0		14	11
61306	DM5CC120D0		14	10
71468	DM53741-5000	5999-00-237-4054	5	70
			8	80
46384	F-256-1	5310-00-776-2212	8	68
98291	FTMM16L2RED	5940-00-951-3920	30	51
54893	HP5082-2912		14	1
12969	ID102	5961-01-273-3054	8	83
81483	IRFF9131		8	84
81349	JANTX1N4454	5961-00-496-7906	13	1
			19	3
			25	2
			26	2
			27	2
			29	1
			37	1

81349	JANTX1N4461	5961-00-434-2799	19	1
81349	JANTX1N5711	5961-00-163-7231	17	4
			34	43
			34	107
81349	JANTX1N5907	5961-01-067-9799	30	2
81349	JANTX2N2905AL	5961-01-187-8836	19	28
81349	JAN1N3611	5961-00-957-6865	16	1
			20	1
			21	29
			37	2
81349	JAN1N3957	5961-00-965-9594	22	1
81349	JAN1N4454-1	5961-01-067-3033	17	2
			34	9
81349	JAN1N5711	5961-00-232-3279	14	3
81349	JAN2N2222A	5961-00-951-8757	24	43
			30	31
			37	18
81349	JAN2N3507	5961-00-136-3909	19	25
81349	JAN2N918	5961-00-905-4815	30	30
81349	JM38510/05652BEX		30	56
81349	JM38510/13101BPX		25	26
			26	29
			27	32
27014	LM105H/883B	5962-00-429-5638	19	54
07933	LM139J		37	55
04713	MC145152L1D		29	28
04713	MC3558G	5962-01-239-6614	37	56
31433	MC752387-5		30	13
			34	58
			36	91
04713	MMBFU310		25	18
			26	19
			27	14
			32	37

04713	MMBF4860		7	11
04713	MMBF4860		13	7
			17	26
			34	16
			34	62
			34	111
04713	MMBT2907		24	41
			36	41
17554	MMF-020-105R-10	5910-00-467-1725	19	8
			34	74
			36	34
			36	115
80207	MML2	5930-00-498-5443	21	35
04713	MMT3904	5961-00-484-7740	7	13
			17	25
			19	27
			20	5
			34	33
			34	60
			36	20
			36	53
			36	99
			37	17
12040	MM54HC390J	5962-01-263-5734	30	53
27014	MM54HC4049J		30	52
17554	MPZ-010-105A-40		32	9
			34	32
96906	MS14046-4	5950-00-488-3056	30	29
96906	MS16624-5025	5365-00-900-1803	3	5
96906	MS21209C0220	5340-00-462-4226	5	84
			8	71
96906	MS21209C0415	5340-00-631-7894	8	57
96906	MS21209C0820	5340-00-721-6936	8	72
96906	MS21209F1-20	5340-00-721-7653	3	24

96906	MS21422-16	5950-01-083-7915	19	23
96906	MS21422-18	5950-01-118-3697	19	22
96906	MS21422-21	5950-01-059-4185	19	24
96906	MS21422-22	5950-01-089-6511	19	21
96906	MS24547-1	5930-00-803-4570	15	15
96906	MS24693C1	5305-00-763-6009	5	40
			8	38
96906	MS35333-69	5310-00-543-4652	5	18
96906	MS51957-1	5305-00-054-5635	15	4
96906	MS51957-13	5305-00-054-5647	5	8
			8	11
96906	MS51957-13B	5305-00-494-7333	3	7
96906	MS51957-17	5305-00-054-5651	8	40
96906	MS51957-2	5305-00-054-5636	5	15
96906	MS51957-2B	5305-00-494-7334	5	65
96906	MS51957-3	5305-00-054-5637	5	23
			8	25
			15	20
96906	MS51957-4	5305-00-054-5638	8	24
96906	MS51957-5	5305-00-054-5639	15	1
			21	41
96906	MS51957-6	5305-00-054-5640	5	42
96906	MS51957-8	5305-00-054-5642	5	11
96906	MS51957-9	5305-00-054-5643	23	14
96906	MS51959-15	5305-00-770-2579	8	30
96906	MS51959-2	5305-00-764-2966	8	1
96906	MS51959-2B	5305-00-455-2508	5	4
96906	MS75083-1	5950-00-035-4413	6	25
96906	MS75083-13	5950-00-035-4416	24	27
			25	15
			26	16
			27	13
96906	MS75083-6	5950-00-171-0066	17	24
96906	MS75083-7	5950-00-035-4418	14	14

			24	33
96906	MS75084-12	5950-00-031-4557	6	20
			7	10
			30	26
96906	MS75084-15	5950-00-170-9770	30	28
96906	MS75084-16	5950-00-031-4560	30	27
96906	MS75084-3	5950-00-377-9882	6	18
			32	10
			32	74
96906	MS75084-4	5950-00-031-4561	6	19
			24	34
96906	MS75085-11	5950-00-325-6462	13	6
96906	MS75085-19	5950-00-031-3779	13	5
96906	MS75085-7	5950-00-035-4425	6	24
			18	1
F2220	MTN1R.47UF16V20%		25	3
F2220	MTR1.5UF16V20%		34	73
F2220	MT3R15UF16V20%		34	76
F2220	MT4R22UF15V20%		6	14
			37	12
04713	MV1404H	5961-01-212-9328	25	1
			26	1
			30	1
17554	MZB-010-225A-20		32	47
			32	73
17554	MZB-020-105A-20		32	46
81349	M27/240-06	5950-01-187-1714	25	14
			26	15
81349	M38510/00803BCB	5962-00-369-9839	29	30
81349	M38510/05051BCB	5962-01-140-5618	7	36
			29	29
81349	M38510/05051BYX		17	45
81349	M38510/05052BYX		17	43
81349	M38510/05252BCB	5962-01-164-5092	29	27

81349	M38510/05553BZX		17	44
81349	M38510/05554BEX	5962-01-131-7815	29	51
81349	M3S510/05655BYX		17	42
81349	M38510/10101BHB	5962-00-365-5536	32	57
			34	79
81349	M38510/10901BGC	5962-01-049-0349	19	53
			37	53
81349	M38510/65003BCA	5962-01-240-5627	30	54
81349	M38527/01-038D	5999-01-199-9123	34	29
81349	M38527/02-017D	5999-01-194-9729	6	65
			8	88
			19	55
81349	M38527/02-018D	5999-01-200-4115	37	62
81349	M39003/01-3076	5910-00-495-0042	37	10
81349	M39006/22-0571	5910-01-119-4302	19	6
81349	M39012/24-0002	5935-00-997-8026	5	52
			5	88
81349	M39014-01-1563	5910-00-113-5277	6	9
81349	M39014-02-1419	5910-00-010-8721	6	8
81349	M39014/01-1336	5910-00-113-5471	34	44
81349	M39014/01-1339	5910-00-113-5445	27	6
			30	6
81349	M39014/01-1348	5910-00-156-5999	30	5
81349	M39014/01-1351	5910-00-113-5276	13	3
			30	9
81349	M39014/01-1354	5910-00-113-9448	30	16
81349	M59014/01-1357	5910-00-010-8666	15	24
			19	10
			21	17
			24	9
			30	3
			34	108
			36	18
			37	9

81349	M39014/01-1489	5910-00-010-8715	29	3
81349	M39014/01-1562	5910-00-098-9234	30	17
81349	M39014/01-1575	5910-00-124-0659	7	6
			13	2
			14	8
			19	9
			20	3
			24	6
			29	4
			30	4
			36	15
			37	13
81349	M39014/01-1578	5910-00-098-8670	7	7
			30	8
81349	M39014/01-1587	5910-00-113-5278	27	4
81349	M39014/01-1593	5910-00-010-8717	6	3
			7	5
			14	4
81349	M39014/01-1593	5910-00-010-8717	16	2
			19	12
			21	30
			27	3
			29	2
			30	7
			32	31
			34	45
			34	82
			34	109
			36	17
			37	11
81349	M39014/02-1360	5910-00-113-5465	16	3
			19	16
			34	57
81349	M39014/02-1417	5910-00-113-9453	26	3

81349	M39016/13-057P	5945-01-171-6560	11	29
			12	24
81349	M39016/19-042L		17	20
			19	18
			24	26
			30	25
81349	M39016/26-020P		16	5
81349	M39104/01-1279		30	10
83324	M45938/13-42		8	64
81349	M55155/30-5Z		17	46
81349	M55302/7-03	5935-00-530-4650	37	16
81349	M55302/8-03	5935-00-448-9337	22	9
81349	M63540/1-1C	5307-01-190-3011	8	60
81349	M63540/1-2C	5307-01-213-9663	5	56
			8	62
81349	M63540/1-3C	5307-01-187-8960	5	61
81349	M63540/1-6C	5307-01-194-3198	8	58
			15	41
81349	M83446/9-13		17	21
81349	M83446/9-15		17	22
81349	M83446/9-28		17	23
80205	NAS1397P2B	5340-00-985-6633	8	31
81349	PC26J060	5910-01-011-8993	32	34
09344	PC73678-1	5962-01-101-3737	37	54
24444	P6KE39		19	5
81349	RCR05G100JS	5905-00-255-3699	6	41
			24	59
			29	20
81349	RCR05G101JS	5905-00-180-8301	7	26
			24	62
			25	24
			26	25
			27	19
			29	19

			32	94
81349	RCR05G101JS	5905-00-180-8301	34	21
			34	48
			34	63
			34	117
81349	RCR05G102JS	5905-00-458-9500	7	20
			8	85
			13	12
			16	7
			17	37
			19	31
			21	34
			24	58
			27	16
			30	44
			34	25
			34	50
			34	90
			37	21
81349	RCR05G103JS	5905-01-035-5065	7	15
			14	19
			17	32
			19	30
			20	6
			24	47
			27	18
			29	18
			32	16
			34	41
			34	65
			34	86
			34	99
			36	45
			36	56

			36	63
			36	72
			36	102
			37	23
81349	RCR05G104JS	5905-00-458-9346	7	24
			17	28
			29	16
			30	38
			32	52
			34	22
			34	38
			34	118
			36	26
			36	62
			36	70
			36	80
			36	103
81349	RCR05G105JS	5905-00-195-4074	36	64
81349	RCR05G120JS	5905-00-491-6344	17	27
			36	24
81349	RCR05G121JS	5905-00-255-3700	17	35
81349	RCR05G123JS	5905-00-466-1215	7	21
			17	29
			30	36
			34	40
81349	RCR05G124JS	5905-00-458-9347	32	80
81349	RCR05G131JS	5905-00-197-0219	24	65
			34	18
			34	37
81349	RCR05G132JS	5905-00-470-9480	14	22
81349	RCR05G133JS	5905-00-232-3113	19	42
81349	RCR05G134JS	5905-00-471-4797	25	23
			26	23
			37	28

81349	RCR05G151JS	5905-00-470-0369	7	34
			24	46
			25	21
			26	22
			27	26
81349	RCR05G152JS	5905-00-180-8303	24	A5
			30	41
			37	41
81349	RCR05G153JS	5905-00-617-5089	6	31
			19	38
			24	55
			25	19
			26	21
			27	25
81349	RCR05G154J5	5905-00-484-7550	29	17
81349	RCR05G180JS	5905-00-471-4622	27	29
			32	97
81349	RCR05G181JS	5905-00-458-9348	30	35
81349	RCR05G182JS	5905-00-407-0082	37	22
81349	RCR05G183JS	5905-00-412-3776	7	25
81349	RCR05G200JS	5905-00-493-5249	34	20
			36	23
81349	RCR05G201JS	5905-00-466-1416	34	49
81349	RCR05G202JS	5905-00-470-9481	19	41
			30	43
			34	24
			34	91
81349	RCR05G203JS	5905-00-413-1200	7	16
			24	54
			27	24
			32	111
			34	68
			36	25
			36	57

			36	101
81349	RCR05G203JS	5905-00-413-1200	37	40
81349	RCR05G204JS	5905-00-470-1319	7	30
			37	32
81349	RCR05G205JS	5905-00-470-0370	7	18
			13	14
			17	33
			30	46
			34	23
			34	67
			34	113
81349	RCR05G220JS	5 905-00-433-1853	7	17
			19	33
			26	27
			27	20
81349	RCR05G221JS	5905-00-177-7486	19	44
			24	48
			32	15
81349	RCR05G222JS	5905-00-401-7424	7	31
			19	40
			30	37
			37	44
81349	RCR05G223JS	5905-00-403-8837	30	39
			34	35
			36	82
81349	RCR05G240JS	5 905-00-481-0961	6	49
			37	52
81349	RCR05G241JS	5905-00-480-0013	26	26
			32	108
			34	66
81349	RCR05G242JS	5905-00-482-7695	14	18
			19	36
			24	44
			37	33

81349	RCR05G243JS	5905-00-180-8313	19	29
81349	RCR05G244JS	5905-00-407-0083	32	67
			32	79
			37	25
81349	RCR05G270JS	5905-00-197-0221	24	52
			27	22
			34	19
81349	RCR05G272JS	5905-00-401-7426	19	50
			34	116
81349	RCR05G273JS	5905-00-407-0084	34	39
			37	35
81349	RCR05G301JS	5905-00-479-6633	14	24
			24	51
			27	28
			32	38
			32	55
			32	96
			37	45
81349	RCR05G302JS	5905-00-421-8918	19	48
			20	7
			30	34
			34	36
			34	114
81349	RCR05G303JS	5905-00-471-2226	37	29
81349	RCR05G304JS	5905-00-433-6482	37	31
81349	RCR05G330JS	5905-00-466-1216	36	22
81349	RCR05G331JS	5905-00-489-7703	27	21
			36	28
81349	RCR05G332JS	5905-00-401-7427	13	10
			27	17
			30	40
81349	RCR05G333JS	5905-00-617-5090	19	49
			37	27
81349	RCR05G334JS	5905-00-412-4045	37	30

81349	RCR05G362JS	5905-00-479-6658	24	60
81349	RCR05G390JS	5905-00-458-9349	25	25
			27	27
81349	RCR05G391JS	5905-00-407-0085	32	65
			32	78
81349	RCR05G392JS	5905-00-433-6483	37	24
81349	RCR05G393JS	5905-00-407-0086	32	114
81349	RCR05G431JS	5905-00-481-5255	32	14
81349	RCR05G433JS	5905-00-469-7358	32	107
81349	RCR05G473JS	5905-00-617-5093	24	57
			29	21
			32	110
			34	34
			34	101
			34	119
			36	58
81349	RCR05G474JS	5905-00-492-2022	32	66
81349	RCR05G510JS	5905-00-412-0758	6	30
			24	56
	-		25	22
			26	24
			30	32
			32	13
			34	87
			37	51
81349	RCR05G511JS	5905-00-197-0224	17	38
			19	35
			34	64
			34	88
81349	RCR05G512JS	5905-00-689-1290	7	23
			14	23
			17	34
			19	34
			24	64

			30	45
81349	RCR05G512JS	5905-00-689-1290	32	11
			32	81
			37	20
81349	RCR05G513JS	5905-00-180-8314	6	32
			7	14
			13	13
			17	31
			20	8
			24	50
			32	112
			34	69
			36	27
			36	44
			36	55
			36	81
81349	RCR05G514JS	5905-00-412-0759	30	33
			32	54
			34	98
			36	71
81349	RCR05G561JS	5905-00-401-7428	30	42
81349	RCR05G562JS	5905-00-411-1851	7	27
			24	49
			32	53
			37	46
81349	RCR05G563JS	5905-00-412-0760	34	100
81349	RCR05G620JS	5905-00-471-4621	32	95
81349	RCR05G621JS	5905-00-422-3798	6	39
81349	RCR05G622JS	5905-00-470-9163	25	20
			26	20
			37	36
81349	RCR05G681JS	5905-00-180-8315	6	34
81349	RCR05G682JS	5905-00-617-5096	19	46
			34	89

81349	RCR05G750JS	5905-00-197-0223	17	36
			24	61
			26	28
81349	RCR05G751JS	5905-00-401-7429	24	53
			27	23
			32	56
			34	112
81349	RCR05G752JS	5905-00-401-7430	30	48
81349	RCR05G753JS	5905-00-407-0089	37	34
81349	RCR05G821JS	5905-00-401-7431	6	35
			37	37
81349	RCR05G822JS	5905-00-466-1218	7	22
			17	30
			24	63
81349	RCR05G823JS	5905-00-466-1219	37	26
81349	RCR05G824JS	5905-00-471-2227	37	39
81349	RCR05G882JS		13	8
81349	RCR05G912JS	5905-00-433-6486	13	11
81349	RCR05G912JS	5905-00-433-6486	37	38
81349	RCR07G101JS	5905-00-141-1183	7	33
81349	RCR07G120JS	5905-00-106-3667	6	48
81349	RCR07G150JS	5905-00-135-3971	29	15
81349	RCR07G151JS	5905-00-119-8811	6	42
81349	RCR07G181JS	5905-00-141-0742	6	50
81349	RCR07G200JS	5905-00-135-3972	14	20
81349	RCR07G201JS		6	37
81349	RCR07G220JS	5905-00-106-3668	14	17
81349	RCR07G3R6JS	5905-00-458-4406	6	51
81349	RCR07G301JS	5905-00-111-4750	6	44
81349	RCR07G5R1JS	5905-00-104-8366	6	45
81349	RCR07G6R8JS	5905-00-133-0382	6	36
81349	RCR07G680JS	5905-01-138-6236	19	32
81349	RCR07G750JS	5905-00-106-9357	6	40
			14	21

81349	RCR20G1R5JS	5905-01-076-9381	6	47
81349	RCR20G2R7JS	5905-00-111-4852	30	47
81349	RCR20G202JS	5905-00-935-8539	37	43
81349	RJR26FW102R	5905-01-206-4288	6	46
			19	39
81349	RJR26FW103R	5905-01-184-3510	13	9
81349	RJR26FW201P		6	43
81349	RJR26FW202R	5905-01-176-5020	7	29
			19	47
81349	RJR26FW502R	5905-01-185-5239	32	12
81349	RJR26FX502R	5905-01-169-9933	34	115
81349	RJR26FX503R	5905-01-185-0555	7	19
07933	RM3503ADC3	5962-01-164-8741	7	35
81349	RNC55K1910FS	5905-00-588-9401	14	16
81349	RNC55K2102FS	5905-00-432-0404	37	50
81349	RNC55K2943FS	5905-00-488-3259	37	48
81349	RNC55K3921FS	5905-00-004-6121	37	47
81349	RNC55K7501FS	5905-00-432-6389	37	42
81349	RNC55K9091FS	5905-00-431-7833	14	15
81349	RWR81SR750FS	5905-01-175-0173	19	43
81349	RWR81S1R82FS	5905-01-157-0503	19	45
81349	RWR81S3320FR		6	38
81349	RWR81S6R81FS	5905-01-106-5201	19	37
14099	SG6025		9	1
52648	SL550G		32	58
52648	SL612CB/CM		34	53
			34	121
52648	SL621C		34	70
80063	SM-A-935134	5935-01-080-3269	8	79
52648	SP8690AB	5962-01-238-8470	24	68
52648	SP8691AB		24	67
15542	TAK-390125	5895-01-237-4742	32	92
80058	TS-4255/GRC-215	6625-01-267-4402	38	1
31433	T370-D106M020AS		37	3

31433	T370B224M035AS		30	12
31433	T370B475M004AS		13	4
31433	T370B685M010AS		36	90
			36	116
31433	T370C225M020AS		7	4
			36	16
31433	T370C335M020AS		34	75
31433	T370C475M020AS		7	8
			34	71
31433	T370D106M006AS		36	42
31433	T370E336M006AS		34	56
			36	110
			37	8
31433	T372B105M020AS		34	84
			36	60
31433	T372B106M002AS		37	5
31433	T372B225M010AS		34	95
			36	68
31433	T372B474M035AS		36	51
			37	4
31433	T372C475M020AS	5910-01-034-2592	30	14
			34	83
31433	T372D106M020AS	5910-01-034-2593	37	14
31433	T372E336M006AS		34	81
31433	T374E106M015AS	5910-01-155-4634	34	55
31433	T3760D475M010AS		34	46
A3036	U-58397.000011R		30	57
71482	UBD-4.0		5	31
95275	VY81C510J		5	44
			5	68
12436	V00691-001	5961-00-170-9786	24	40
			27	15
A2728	0U-20.20		8	48
A2728	0U-20.25		8	69

A2728	0U-30.55		21	43
A2728	0U-40.80		15	37
			15	42
06776	0001029		17	60
91662	02-015-323-6100	5935-01-241-7224	14	28
06776	050-1627		32	30
			34	14
			36	19
56845	1C5001-A3		7	32
			32	103
12954	1N4454		7	1
			20	2
			32	44
			32	100
			34	54
			34	94
			34	106
			36	13
12954	1N4454		36	33
			36	38
			36	50
			36	59
			36	76
			36	88
			36	97
			36	114
28480	1N5711		14	2
			32	45
			34	30
14099	1N6075	5961-01-131-6908	11	1
			12	1
			19	2
			22	2
A0720	101-279		3	9

71279	1602040020500		16	4
28009	16600688-145		5	9
			5	71
00779	181270-3		5	74
82240	2-57-0334-55-00		3	6
02289	2HA2A126	5945-00-879-9494	22	4
02289	2KA2A126		20	4
04713	2N3994		34	17
10001	2016315PC3	5310-00-902-3950	8	19
75915	255001	5920-01-252-7776	30	19
A1631	281216-2		24	25
A3026	3-10285.005//C		5	13
			15	3
			23	10
			37	60
A3026	3-10285.006//C		8	6
			21	39
A3026	3-10285.007//C		8	51
			21	20
A3026	3-10285.008//C		8	13
			8	89
			15	12
A3026	3-10311-001		21	12
			31	6
A3026	3-10311-002		5	12
			8	16
			15	2
			21	40
			23	9
			23	13
			37	61
A3026	3-10311-003		23	2
A3026	3-10311-004		5	24
			8	12

			15	13
A3423	3-71492-016		21	19
A3423	3-71492-018		21	15
A3423	3-71492-020		21	6
A3423	3-71492-025		8	4
			21	27
A3423	3-71942-017		21	10
32997	3082P-45-102		32	39
32997	3082P-45-103		32	113
32997	3082P-45-104	5905-01-291-3983	30	49
32997	3082P-45-203		32	109
32997	3082P-45-503		32	51
			34	92
11871	317-400-157	5930-00-163-4036	5	46
F7303	3310416102500		24	39
			29	14
82796	3310416103500		29	12
F7303	3310416104500		24	38
			29	13
F7303	3310416105500		24	37
F7303	3310416114500		24	36
F7303	3310416116500		29	11
F7303	3410799102400		29	10
			30	23
F7303	3410799103400		30	21
F7303	3410799104400		29	9
			30	22
F7303	3410799105400		29	8
F7303	3410799108400		30	50
F7303	3410799114400		29	7
F7303	3410799116400		30	20
13499	352-0997-012	5961-00-501-1013	32	64
			32	76
F2220	37291		32	61

A3026	4-74796-001		21	37
A3026	4-74796-004		21	38
A3026	4-93969.0000		6	1
			34	31
			34	80
			36	78
			36	89
			36	109
			37	6
60935	402/1/57612/019		29	5
			30	11
60935	402/1/57613/016		24	7
			25	12
			26	12
			27	11
60935	402/1/57625/020		24	8
07187	4022892	5935-01-062-2405	5	72
			8	78
07187	4022893-001	5935-01-053-4041	12	23
			17	19
			24	24
			30	24
07263	4049BFMQB		36	48
			36	65
			36	104
07263	4066BFMQB		32	116
13103	445214-102		8	87
			24	78
			30	61
			32	70
			32	86
			37	63
89536	483743	5961-01-214-2382	24	42
			32	102

			34	78
			36	40
98291	51-451-0000	5935-01-017-5018	6	17
			9	18
			14	12
			17	18
F7303	518-0718-0-42-1-1-1		32	36
			32	50
			32	63
			32	75
			32	93
			32	101
			32	106
			34	42
			34	47
			34	59
			34	77
			34	85
			34	97
			34	110
			36	35
			36	39
			36	43
			36	52
			36	61
			36	69
			36	79
			36	93
			36	98
			36	111
			36	117
98291	52-452-0000	5935-01-080-1651	24	23
96214	531740-1	5935-00-402-1519	8	43
			8	81

96214	536958-1	5962-00-172-8261	34	93
97942	577R126H07	5999-00-830-4757	5	36
56845	7CI003-A3		32	115
05869	750511-1	5961-01-047-7473	7	12
			19	26
			32	77
			34	61
			36	21
			36	54
			36	100
14933	7702501EB	5962-01-124-4915	29	23
14933	7704401CX		29	26
14933	7705801FX		17	41
72962	79-1660-26	5310-00-052-6742	5	22
			8	5
72962	79NCFMA2-40	5310-00-827-9286	8	59
72962	79NCFM1-26	5310-00-720-6591	8	63
			15	40
14933	7901101CB	5962-01-109-4231	36	37
00779	85931-5	5999-00-130-1746	17	67
31019	883C4068BC	5962-01-033-2283	29	25
18876	9073891-3	5999-00-021-2119	8	82
06481	971618-0411		34	103
			36	105
06481	974082-0411	5962-01-195-4644	36	36
			36	47
			36	66
			36	83
			36	118
12294	9900-001-6004		10	1
			18	6

FIGURE AND ITEM NUMBER INDEX

FIG.	ITEM	STOCK NUMBER	CAGEC	PART NUMBER
1	1	5895-01-205-6180	80063	A3023805

1	2		80063	C-11670/G
2	1		80063	A3078271-3
2	2		80063	A3031341
2	3		80063	A3026001
3	1		80063	A3027357
3	2		80063	A3031498
3	3		80063	A3027736
3	4		80063	A3027740
3	5	5365-00-900-1803	96906	MS16624-5025
3	6		82240	2-57-0334-55-00
3	7	5305-00-494-7333	96906	MS51957-13B
3	8		80063	A3027026-2
3	9		A0720	101-279
3	10		80063	A3031420
3	11		80063	A3027781
3	12		80065	A3027875
3	13		80063	A3031038-184
3	14		80063	A3034572
3	15		80063	A3031417
3	16		80063	A3031414
3	17		80063	A3027903
3	18		80063	A3031413
3	19		80063	A3031415
3	20		80063	A3031411
3	21		80063	A3031412
3	22		80063	A3031423
3	23		80063	A3031421
3	24	5340-00-721-7653	96906	MS21209F1-20
4	1		80063	A3031038-212
4	2	5895-01-205-0947	80063	A3026007
4	3		80063	A3034571-3
4	4		80063	A3026003
4	5		80063	A3031038-210
4	6		80063	A3031038-211

4	7	5895-01-276-7835	80063	A3026002
4	8	5895-01-205-6175	80063	A3026006
4	9	5895-01-205-6183	80063	A3026005
4	10	5895-01-207-8990	80063	A3026004
4	11		80063	A3026000
4	12		80063	A3027937
4	13		80063	A3027954
4	14		80063	A3027810
4	15		80063	A3027812
4	16		80063	A3027838-1
4	17		80063	A3027031-4
4	18		80063	A3030947
4	19		80063	A3027721
5	1		80063	A3031087
5	2		80063	A3027354
5	3		80063	A3031470
5	4	5305-00-455-2508	96906	MS51959-2B
5	5		80063	A3027734-1
5	6	5305-01-258-6181	80063	A3027727-1
5	7		80063	A3026908-3
5	8	5305-00-054-5647	96906	MS51957-13
5	9		28009	16600688-145
5	10		80063	A3027356
5	11	5305-00-054-5642	96906	MS51957-8
5	12		A3026	3-10311-002
5	13		A3026	3-10285.005//C
5	14	5999-01-276-7858	80063	A3027344
5	15	5305-00-054-5636	96906	MS51957-2
5	16		80063	A3027745
5	17		80063	A3031401-3
5	18	5310-00-543-4652	96906	MS35333-69
5	19		80063	A3026906-2
5	20		80063	A3034571-1
5	21		80063	A3031038-187

5	22	5310-00-052-6742	72962	79-1660-26
5	23	5305-00-054-5637	96906	MS51957-3
5	24		A3026	3-10311-004
5	25	5940-01-274-2430	80063	A3026908-4
5	26		80063	A3027322
5	27		80063	A3027817
5	28		80063	A3031097
5	29		80063	A3027824
5	30		80063	A3027823
5	31		71482	UBD-4.0
5	32		80063	A3030153-1
5	33		80063	A3027730
5	34		80063	A3027862
5	35		80063	A3027896
5	36	5999-00-830-4757	97942	577R126H07
5	37		80063	A3027747-2
5	38		80063	A3027957
5	39		80063	A3027806
5	40	5305-00-763-6009	96906	MS24693C1
5	41		80063	A3027810
5	42	5305-00-054-5640	96906	MS51957-6
5	43		80063	A3026908-1
5	44		95275	VY81C510J
5	45		80063	A3027766
5	46	5930-00-163-4036	11871	317-400-157
5	47		80063	A3030510
5	48		80063	A3027958
5	49		80063	A3026757-43
5	50		80063	A3031096
5	51		80063	A3031095
5	52	5935-00-997-8026	81349	M39012/24-0002
5	53		80063	A3027820-4
5	54		80063	A3027820-3
5	55	5340-01-276-1804	80063	A3027724

5	56	5307-01-213-9663	81349	M63540/1-2C
5	57		80063	A3031430
5	58		80063	A3027362
5	59		80063	A3027872-1
5	60		80063	A3027871
5	61	5307-01-187-8960	81349	M63540/1-3C
5	62		80063	A3026869-1
5	63		80063	A3027809
5	64		80063	A3027355-2
5	65	5305-00-494-7334	96906	MS51957-2B
5	66		80063	A3027026-1
5	67		80063	A3027355-1
5	68		95275	VY81C510J
5	69	6150-01-329-1523	80063	A3026941-2
5	70	5999-00-237-4054	71468	DM53741-5000
5	71		28009	16600688-145
5	72	5935-01-062-2405	07187	4022892
5	73		80063	A3030158-2
5	74		00779	181270-3
5	75		80063	A3031087
5	76		80063	A3027833
5	77		80063	A3027832
5	78		80063	A3027831
5	79		80063	A3027747-1
5	80		80063	A3027757
5	81		80063	A3027738
5	82		80063	A3027056-1
5	83		80063	A3027777
5	84	5340-00-462-4226	96906	MS21209C0220
5	85		80063	A3026757-43
5	86		80063	A3031096
5	87		80063	A3031095
5	88	5935-00-997-8026	81349	M39012/24-0002
6	1		A3026	4-93969.0000

6	2		80063	A3027501-10
6	3	5910-00-010-8717	81349	M39014/01-1593
6	4		80063	A3026715-4
6	5		80063	A3026718-23
6	6		80063	A3026718-13
6	7		80063	A3026714-2
6	8	5910-00-010-8721	81349	M39014-02-1419
6	9	5910-00-113-5277	81349	M39014-01-1563
6	10		80063	A3030088-2
6	11		80063	A3030084-83
6	12		29990	ATC100A320F50X
6	13		29990	ATC100A160FC50X
6	14		F2220	MT4R22UF15V20%
6	15		80063	CM04FD910603
6	16		80063	A3030166
6	17	5935-01-017-5018	98291	51-451-0000
6	18	5950-00-377-9882	96906	MS75084-3
6	19	5950-50-031-4561	96906	MS75084-4
6	20	5950-00-031-4557	96906	MS75084-12
6	21		80063	A3031337
6	22		80063	A3026726-1
6	23		80063	A3030136
6	24	5950-00-035-4425	96906	MS75085-7
6	25	5950-00-035-4413	96906	MS75083-1
6	26		80063	A3030185
6	27		80063	A3030189
6	28		80063	A3026792
6	29		80063	A3030719
6	30	5905-00-412-0758	81349	RCR05G510JS
6	31	5905-00-617-5089	81349	RCR05G153JS
6	32	5905-00-180-8314	81349	RCR05G513JS
6	33		80063	A3030083-1
6	34	5905-00-180-8315	81349	RCR05G681JS
6	35	5905-00-401-7431	81349	RCR05G821JS

6	36	5905-00-133-0382	81349	RCR07G6R8JS
6	37		81349	RCR07G201JS
6	38		81349	RWR81S3320FR
6	39	5905-00-422-3798	81349	RCR05G621JS
6	40	5905-00-106-9357	81349	RCR07G750JS
6	41	5905-00-255-3699	81349	RCR05G100JS
6	42	5905-00-119-8811	81349	RCR07G151JS
6	43		81349	RJR26FW201P
6	44	5905-00-111-4750	81349	RCR07G301JS
6	45	5905-00-104-8366	81349	RCR07G5R1JS
6	46	5905-01-206-4288	81349	RJR26FW102R
6	47	5905-01-076-9381	81349	RCR20G1R5JS
6	48	5905-00-106-3667	81349	RCR07G120JS
6	49	5905-00-481-0961	81349	RCR05G240JS
6	50	5905-00-141-0742	81349	RCR07G181JS
6	51	5905-00-458-4406	81349	RCR07G3R6JS
6	52		80063	A3030094
6	53		80063	A3030095
6	54		80063	A3030096
6	55		80063	A3030097
6	56		80063	A3030098
6	57		80063	A3030099
6	58		80063	A3030100
6	59		80063	A3030201-2
6	60		80063	A3030202-1
6	61		80063	A3027975
6	62		80063	A3026908-5
6	63		80063	A3026951-1
6	64		80063	A3027885
6	65	5999-01-194-9729	81349	M38527/02-017D
6	66	6150-01-328-5675	80063	A3026941-3
6	67		80063	A3027898
6	68		80063	A3031038-185
6	69		80063	A3027693

6	70	6150-01-329-1524	80063	A3026941-1
6	71		80063	A3027793
7	1		12954	1N4454
7	2		04713	BAV70
7	3		04713	BAV99
7	4		31433	T370C225M020AS
7	5	5910-00-010-8717	81349	M39014/01-1593
7	6	5910-00-124-0659	81349	M39014/01-1575
7	7	5910-00-098-8670	81349	M39014/01-1578
7	8		31433	T370C475M020AS
7	9		80063	A3030158-1
7	10	5950-00-031-4557	96906	MS75084-12
7	11		04713	MMBF4860
7	12	5961-01-047-7473	05869	750511-1
7	13	5961-00-484-7740	04713	MMT3904
7	14	5905-00-180-8314	81349	RCR05G513JS
7	15	5905-01-035-5065	81349	RCR05G103JS
7	16	5905-00-413-1200	81349	RCR05G203JS
7	17	5905-00-433-1853	81349	RCR05G220JS
7	18	5905-00-470-0370	81349	RCR05G205JS
7	19	5905-01-185-0555	81349	RJR26FX503R
7	20	5905-00-458-9500	81349	RCR05G102JS
7	21	5905-00-466-1215	81349	RCR05G123JS
7	22	5905-00-466-1218	81349	RCR05G822JS
7	23	5905-00-689-1290	81349	RCR05G512JS
7	24	5905-00-458-9346	81349	RCR05G104JS
7	25	5905-00-412-3776	81349	RCR05G183JS
7	26	5905-00-180-8301	81349	RCR05G101JS
7	27	5905-00-411-1851	81349	RCR05G562JS
7	28		80063	A3031562
7	29	5905-01-176-5020	81349	RJR26FW202R
7	30	5905-00-470-1319	81349	RCR05G204JS
7	31	5905-00-401-7424	81349	RCR05G222JS
7	32		56845	1C5001-A3

7	33	5905-00-141-1183	81349	RCR07G101JS
7	34	5905-00-470-0369	81349	RCR05G151JS
7	35	5962-01-164-8741	07933	RM3503ADC3
7	36	5962-01-140-5618	81349	M38510/05051BCB
7	37		80063	A3031038-186
7	38		80063	A3031041
8	1	5305-00-764-2966	96906	MS51959-2
8	2	5940-01-274-2430	80063	A3026908-4
8	3		80063	A3027749
8	4		A3423	3-71492-025
8	5	5310-00-052-6742	72962	79-1660-26
8	6		A3026	3-10285.006//C
8	7	5999-01-277-2682	80063	A3027685
8	8		80063	A3031410
8	9		80063	A3027731
8	10		80063	A3027754
8	11	5305-00-054-5647	96906	MS51957-13
8	12		A3026	3-10311-004
8	13		A3026	3-10285.008//C
8	14		80063	A3030943
8	15		80063	A3030231
8	16		A3026	3-10311-002
8	17		80063	A3027672
8	18		80063	A3027955
8	19	5310-00-902-3950	10001	2016315PC3
8	20		80063	A3027653
8	21		80063	A3027884
8	22		80063	A3031305
8	23		80063	A3027323
8	24	5305-00-054-5638	96906	MS51957-4
8	25	5305-00-054-5637	96906	MS51957-3
8	26		71468	DDMY-36W4S
8	27		80063	A3027658
8	28		80063	A3027826

8	29		80063	A3027732-1
8	30	5305-00-770-2579	96906	MS51959-15
8	31	5340-00-985-6633	80205	NAS1397P2B
8	32		80063	A3030151
8	33	5999-01-276-9428	80063	A3027346
8	35		80063	A3027353
8	36		80063	A3027873
8	37	5999-01-276-9425	80063	A3027352
8	38	5305-00-763-6009	96906	MS24693C1
8	39		80063	A3030152
8	40	5305-00-054-5651	96906	MS51957-17
8	41		80063	A3031107
8	42	6150-01-328-5675	80063	A3026941-3
8	43	5935-00-402-1519	96214	531740-1
8	44		80063	A3027895
8	45		80063	A3027788
8	46		80063	A3027976
8	47		80063	A3027843
8	48		A2728	0U-20.20
8	49		80063	A3027956
8	50		80063	A3027729
8	51		A3026	3-10285.007//C
8	52		80063	A3031038-204
8	53		80063	A3031304
8	54		80063	A3031306
8	55		80063	A3034571-2
8	56	5940-01-277-3793	80063	A3026911
8	57	5340-00-631-7894	96906	MS21209C0415
8	58	5307-01-194-3198	81349	M63540/1-6C
8	59	5310-00-827-9286	72962	79NCFMA2-40
8	60	5307-01-190-3011	81349	M63540/1-1C
8	61		80063	A3031334-2
8	62	5307-01-213-9663	81349	M63540/1-2C
8	63	5310-00-720-6591	72962	79NCFM1-26

8	64		83324	M45938/13-42
8	65		80063	A3027952
8	66		80063	A3027785
8	67		80063	A3027949
8	68	5310-00-776-2212	46384	F-256-1
8	69		A2728	0U-20.25
8	70		80063	A3030901
8	71	5340-00-462-4226	96906	MS21209C0220
8	72	5340-00-721-6936	96906	MS21209C0820
8	73		80063	A3027880
8	74		80063	A3027780
8	75		80063	A3030093
8	76		80063	A3027821
8	77		71468	DDMY-36W4S
8	78	5935-01-062-2405	07187	4022892
8	79	5935-01-080-3269	80063	SM-A-935134
8	80	5999-00-237-4054	71468	DM53741-5000
8	81	5935-00-402-1519	96214	531740-1
8	82	5999-00-021-2119	18876	9073891-3
8	83	5961-01-273-3054	12969	ID102
8	84		81483	IRFF9131
8	85	5905-00-458-9500	81349	RCR056102JS
8	86		80063	A3031038-205
8	87		13103	445214-102
8	88	5999-01-194-9729	81349	M38527/02-017D
8	89		A3026	3-10285.008//C
8	90		80063	A3027756
8	91		80063	A3027056-1
8	92		80063	A3027818
8	93		80063	A3027778
9	1		14099	SG6025
9	2		29990	ATC100A9R1BC50X
9	3		80063	A3030084-82
9	4		29990	ATC700A101FC50X

9	5		29990	ATC100A160FC50X
9	6		29990	ATC700A111FC50X
9	7		29990	ATC700A271FC50X
9	8		29990	ATC700A102FC50X
9	9		29990	ATC100A680F50X
9	10		29990	ATC700A911FC50X
9	11		29990	ATC100A430FC50X
9	12		29990	ATC100A240FC50X
9	13		29990	ATC700A821FC50X
9	14		29990	ATC100A360JC50X
9	15		29990	ATC700A681FC50X
9	16		29990	ATC100A320F50X
9	17		80063	A3030169
9	18	5935-01-017-5018	98291	51-451-0000
9	19		80063	A3030120
9	20		80063	A3030119
9	21		80063	A3030141
9	22		80063	A3030116
9	23		80063	A3030117
9	24		80063	A3030118
9	25		80063	A3030740
9	26		80063	A3031038-197
9	27		80063	A3027679
9	28		80063	A3027695
9	29		80063	A3027760
9	30		80063	A3027774
9	31		80063	A3031038-59
9	32		80063	A3027775
9	33		80063	A3027797
9	34		80063	A3027772
9	35		80063	A3027773
9	36		80063	A3027771
10	1		12294	9900-001-6004
10	2		80063	A3034571-2

10	3		80063	A3026302
10	4		80063	A3027951
10	5		80063	A3031038-190
10	6		80063	A3031307
10	7		80063	A3027974
10	8		80063	A3027656
10	9		80063	A3031245
10	10	5999-01-276-7859	80063	A3027655
10	11	5999-01-276-7861	80063	A3027659
10	12	5999-01-276-7860	80063	A3027660
10	13		80063	A3031308
10	14		80063	A3027894
10	15		80063	A3027928
10	16		80063	A3027893
10	17		80063	A3027825
10	18		80063	A3027888
10	19		80063	A3027804
11	1	5961-01-131-6908	14099	1N6075
11	2		29990	ATC100B301FC200X
11	3		29990	ATC100B331FC200X
11	4		29990	ATC100B222FC200X
11	5		29990	ATC100B910FC500X
11	6		29990	ATC100B911FC200X
11	7	5910-01-162-4912	29990	ATC100B101FC500X
11	8		29990	ATC100B431FC200X
11	9		29990	ATC100B360FC200X
11	10		29990	ATC100B560FC500X
11	11		29990	ATC100B391FC200X
11	12		29990	ATC100B221FC200X
11	13		29990	ATC100B820FC500X
11	14		29990	ATC100B430FC500X
11	15		29990	ATC100B151FC300X
11	16		29990	ATC100B201FC300X
11	17		29990	ATC100B161FC300X

11	18		29990	ATC100B471FC200X
11	19	5910-01-162-4917	29990	ATC100B620FC500X
11	20		29990	ATC100B131FC300X
11	21		29990	ATC100B360FC500X
11	22		29990	ATC100B5R1BC500X
11	23		29990	ATC100B111FC300X
11	24		29990	ATC100B181FC300X
11	25		29990	ATC100B150FC500X
11	26	5910-01-162-4922	29990	ATC100B100FC500X
11	27	5910-01-162-4916	29990	ATC100B160FC500X
11	28		29990	ATC100B680FC500X
11	29	5945-01-171-6560	81349	M39016/13-057P
11	30		80063	A3030133
11	31		80063	A3030134
11	32		80063	A3030135
11	33		80063	A3030130
11	34		80063	A3030131
11	35		80063	A3030122
11	36		80063	A3030124
11	37		80063	A3027899
11	38		80063	A3027901
11	39		80063	A3027902
11	40		80063	A3026580
11	41		80063	A3027735
11	42		80063	A3027900
11	43		80063	A3031038-201
12	1	5961-01-131-6908	14099	1N6075
12	2		29990	ATC100B131FC300X
12	3		29990	ATC100B820FC500X
12	4		29990	ATC100B221FC200X
12	5		29990	ATC100B201FC300X
12	6		29990	ATC100B360FC200X
12	7		29990	ATC100B331FC200X
12	8		29990	ATC100B301FC200X

12	9		29990	ATC100B391FC200X
12	10	5910-01-162-4912	29990	ATC100B101FC500X
12	11	5910-01-162-4917	29990	ATC100B620FC500X
12	12		29990	ATC100B161FC300X
12	13		29990	ATC100B390FC500X
12	14		29990	ATC100B430FC500X
12	15		29990	ATC100B150FC500X
12	16		29990	ATC100B680FC500X
12	17	5910-01-190-5257	29990	ATC100B240FC500X
12	18		29990	ATC100B470FC500X
12	19		29990	ATC100B360FC500X
12	20		29990	ATC100B220FC500X
12	21	5910-01-162-4916	29990	ATC100B160FC500X
12	22		29990	ATC100B270FC500X
12	23	5935-01-053-4041	07187	4022893-001
12	24	5945-01-171-6560	81349	M39016/13-057P
12	25		80063	A3030132
12	26		80063	A3030133
12	27		80063	A3030124
12	28		80063	A3030130
12	29		80063	A3030121
12	30		80063	A3030123
12	31		80063	A3027902
12	32		80063	A3027901
12	33		80063	A3027735
12	34		80063	A3026580
12	35		80063	A3027900
12	36		80063	A3031038-198
12	37		80063	A3027899
13	1	5961-00-496-7906	81349	JANTX1N4454
13	2	5910-00-124-0659	81349	M39014/01-1575
13	3	5910-00-113-5276	81349	M39014/01-1351
13	4		31433	T370B475M004AS
13	5	5950-00-031-3779	96906	MS75085-19

13	6	5950-00-325-6462	96906	MS75085-11
13	7		04713	MMBF4860
13	8		81349	RCR05G882JS
13	9	5905-01-184-3510	81349	RJR26FW103R
13	10	5905-00-401-7427	81349	RCR05G332JS
13	11	5905-00-433-6486	81349	RCR05G912JS
13	12	5905-00-458-9500	81349	RCR05G102JS
13	13	5905-00-180-8314	81349	RCR05G513JS
13	14	5905-00-470-0370	81349	RCR05G205JS
13	15		80063	A3031038-199
14	1		54893	HP5082-2912
14	2		28480	1N5711
14	3	5961-00-232-3279	81349	JAN1N5711
14	4	5910-00-010-8717	81349	M39014/01-1593
14	5		80063	A3030744-1
14	6		29990	ATC100A2R7B500X
14	7		29990	ATC100B471KC200X
14	8	5910-00-124-0659	81349	M39014/01-1575
14	9		29990	ATC100A120JC100X
14	10		61306	DM5CC120D0
14	11		61306	DM5CC030D0
14	12	5935-01-017-5018	98291	51-451-0000
14	13		80063	A3030115
14	14	5950-00-035-4418	96906	MS75083-7
14	15	5905-00-431-7833	81349	RNC55K9091FS
14	16	5905-00-588-9401	81349	RNC55K1910FS
14	17	5905-00-106-3668	81349	RCR07G220JS
14	18	5905-00-482-7695	81349	RCR05G242JS
14	19	5905-01-035-5065	81349	RCR05G103JS
14	20	5905-00-135-3972	81349	RCR07G200JS
14	21	5905-00-106-9357	81349	RCR07G750JS
14	22	5905-00-470-9480	81349	RCR05G132JS
14	23	5905-00-689-1290	81349	RCR05G512JS
14	24	5905-00-479-6633	81349	RCR05G301JS

14	25		80063	A3030092
14	26		80063	A3031038-200
14	27		80063	A3030741
14	28	5935-01-241-7224	91662	02-015-323-6100
14	29	6150-01-329-1524	80063	A3026941-1
15	1	5305-00-054-5639	96906	MS51957-5
15	2		A3026	3-10311-002
15	3		A3026	3-10285.005//C
15	4	5305-00-054-5635	96906	MS51957-1
15	5		80063	A3027805
15	6		80063	A3027765
15	7		80063	A3027948
15	8		80063	A3027755
15	9		80063	A3026869-8
15	10		80063	CLR65BB560KGL
15	11	5940-01-274-2430	80063	A3026908-4
15	12		A3026	3-10285.008//C
15	13		A3026	3-10311-004
15	14		80063	A3027004-1
15	15	5930-00-803-4570	96906	MS24547-1
15	16		80063	A3027689
15	17		80063	A3027006-2
15	18		80063	A3026869-2
15	19		80063	A3027006-1
15	20	5305-00-054-5637	96906	MS51957-3
15	21		80063	A3027947
15	22		80063	A3030170
15	23		80063	A3031038-189
15	24	5910-00-010-8666	81349	M39014/01-1357
15	25	5999-01-276-7862	80063	A3027661
15	26		80063	A3027542-2
15	27		80063	A3026860-2
15	28		80063	A3027003-3
15	29		80063	A3027967

15	30		80063	A3027726
15	31		80063	A3027716
15	32		80063	A3027969
15	33		80063	A3027922
15	34		80063	A3027796
15	35		80063	A3027801
15	36		80063	A3027968
15	37		A2728	OU-40.80
15	38		80063	A3027917
15	39		80063	A3027839
15	40	5310-00-720-6591	72962	79NCFM1-26
15	41	5307-01-194-3198	81349	M63540/1-6C
15	42		A2728	OU-40.80
15	43		80063	A3027776
15	44		80063	A3027927
15	45		80063	A3027718
15	46		80063	A3027719
15	47		80063	A3027816
15	48		80063	A3027923
15	49		80063	A3027717
15	50		80063	A3027882
15	51		80063	A3027883
15	52		80063	A3027924
16	1	5961-00-957-6865	81349	JAN1N3611
16	2	5910-00-010-8717	81349	M39014/01-1593
16	3	5910-00-113-5465	81349	M39014/02-1360
16	4		71279	1602040020500
16	5		81349	M39016/26-020P
16	6		80063	A3030114
16	7	5905-00-458-9500	81349	RCR05G102JS
16	8		80063	A3031038-202
16	9		80063	A3030593
17	1		04713	BAV70
17	2	5961-01-067-3033	81349	JAN1N4454-1

17	3		04713	BAW56
17	4	5961-00-163-7231	81349	JANTX1N5711
17	5		16546	C390J1005CFPB
17	6		16546	C220J1005CFPB
17	7		16546	C560J1005CFPB
17	8		16546	C829J1005CFPB
17	9		29990	ATC100A470JC50X
17	10		16546	C152K1005XFPB
17	11		16546	C680J1005CFPB
17	12		16546	C103K1005XHPB
17	13		80063	A303I507
17	14		29990	ATC700A121JC50X
17	15		80063	A303I556
17	16		16546	C102K1005XFPB
17	17		71468	DBMY25SOL3
17	18	5935-01-017-5018	98291	51-451-0000
17	19	5935-01-053-4041	07187	4022893-001
17	20		81349	M39016/19-042L
17	21		81349	M83446/9-13
17	22		81349	M83446/9-15
17	23		81349	M83446/9-28
17	24	5950-00-171-0066	96906	MS75083-6
17	25	5961-00-484-7740	04713	MMT3904
17	26		04713	MMBF4860
17	27	5905-00-491-6344	81349	RCR05G120JS
17	28	5905-00-458-9346	81349	RCR05G104JS
17	29	5905-00-466-1215	81349	RCR05G123JS
17	30	5905-00-466-1218	81349	RCR05G822JS
17	31	5905-00-180-8314	81349	RCR05G513JS
17	32	5905-01-035-5065	81349	RCR05G103JS
17	33	5905-00-470-0370	81349	RCR05G205JS
17	34	5905-00-689-1290	81349	RCR05G512JS
17	35	5905-00-255-3700	81349	RCR05G121JS
17	36	5905-00-197-0223	81349	RCR05G750JS

17	37	5905-00-458-9500	81349	RCR05G102JS
17	38	5905-00-197-0224	81349	RCR05G511JS
17	39		80063	A3030224-101
17	40		80063	A3030873
17	41		14933	7705801FX
17	42		81349	M38510/05655BYX
17	43		81349	M38510/05052BYX
17	44		81349	M38510/05553BZX
17	45		81349	M38510/05051BYX
17	46		81349	M55155/30-5Z
17	47		80063	A3031038-20
17	48		80063	A3031464-8
17	49		80063	A3027702
17	50		80063	A3027700
17	51		80063	A3027701
17	52		80063	A3031464-6
17	53		80063	A3027972
17	54		80063	A3031464-7
17	55		80063	A3027870
17	56		80063	A3027720
17	57		80063	A3030895
17	58		80063	A3030885
17	59		80063	A3031464-5
17	60		06776	0001029
17	61		80063	A3031464-4
17	62		80063	A3031464-9
17	63		80063	A3031464-3
17	64		80063	A3031464-2
17	65		80063	A3027743
17	66		80063	A3031464-1
17	67	5999-00-130-1746	00779	85931-5
18	1	5950-00-035-4425	96906	MS75085-7
18	2		80063	A3031356
18	3		80063	A3031038-195

18	4	5999-01-277-2681	80063	A3027654
18	5		80063	A3027950
18	6		12294	9900-001-6004
18	7		80063	A3027973
18	8		80063	A3030230-3
18	9		80063	A3027890
18	10		80063	A3027792
18	11		80063	A3027891
18	12		80063	A3027887
18	13		80063	A3027897
19	1	5961-00-434-2799	81349	JANTX1N4461
19	2	5961-01-131-6908	14099	1N6075
19	3	5961-00-496-7906	81349	JANTX1N4454
19	4		04713	BAW56
19	5		24444	P6KE39
19	6	5910-01-119-4302	81349	M39006/22-0571
19	7		80063	CLR65BH100KGL
19	8	5910-00-467-1725	17554	MMF-020-105R-10
19	9	5910-00-124-0659	81349	M39014/01-1575
19	10	5910-00-010-8666	81349	M39014/01-1357
19	11	5910-00-426-0330	88818	C605006182
19	12	5910-00-010-8717	81349	M39014/01-1593
19	13		81349	CLR65BD330KGL
19	14		80063	CLR65BC470KGL
19	15		80063	CLR65BB560KGL
19	16	5910-00-113-5465	81349	M39014/02-1360
19	17		80063	A3031038-196
19	18		81349	M39016/19-042L
19	19		80063	A3030126
19	20		80063	A3030125
19	21	5950-01-089-6511	96906	MS21422-22
19	22	5950-01-118-3697	96906	MS21422-18
19	23	5950-01-083-7915	96906	MS21422-16
19	24	5950-01-059-4185	96906	MS21422-21

19	25	5961-00-136-3909	81349	JAN2N3507
19	26	5961-01-047-7473	05869	750511-1
19	27	5961-00-484-7740	04713	MMT3904
19	28	5961-01-187-8836	81349	JANTX2N2905AL
19	29	5905-00-180-8313	81349	RCR05G243JS
19	30	5905-01-035-5065	81349	RCR05G103JS
19	31	5905-00-458-9500	81349	RCR05G102JS
19	32	5905-01-138-6236	81349	RCR07G680JS
19	33	5905-00-433-1853	81349	RCR05G220JS
19	34	5905-00-689-1290	81349	RCR05G512JS
19	35	5905-00-197-0224	81349	RCR05G511JS
19	36	5905-00-482-7695	81349	RCR05G242JS
19	37	5905-01-106-5201	81349	RWR81S6R81FS
19	38	5905-00-617-5089	81349	RCR05G153JS
19	39	5905-01-206-4288	81349	
19	40	5905-00-401-7424	81349	
19	41	5905-00-470-9481	81349	
19	42	5905-00-232-3113	81349	
19	43	5905-01-175-0173	81349	
19	44	5905-00-177-7486	81349	
19	45	5905-01-157-0503	81349	
19	46	5905-00-617-5096	81349	
19	47	5905-01-176-5020	81349	
19	48	5905-00-421-8918	81349	
19	49	5905-00-617-5090	81349	
19	50	5905-00-401-7426	81349	
19	51		80063	
19	52		80063	A3030201-1
19	53	5962-01-049-0349	81349	M38510/10901BGC
19	54	5962-00-429-5638	27014	LM105H/883B
19	55	5999-01-194-9729	81349	M38527/02-017D
20	1	5961-00-957-6865	81349	JAN1N3611
20	2		12954	1N4454
20	3	5910-00-124-0659	81349	RJR26FW102R

20	4		02289	RCR05G222JS
20	5	5961-00-484-7740	04713	RCR05G202JS
20	6	5905-01-035-5065	81349	RCR05G133JS
20	7	5905-00-421-8918	81349	RWR81SR750FS
20	8	5905-00-180-8314	81349	RCR05G221JS
20	9	5960-00-791-1601	25088	RWR81S1R82FS
20	10		80063	RCR05G682JS
20	11		80063	RJR26FW202R
20	12		80063	RCR05G302JS
20	13		80063	RCR05G333JS
21	1		80063	RCR05G272JS
21	2		80063	A3030101
21	3		80063	A3027711
21	4		80063	A3027002
21	5		80063	A3027057-1
21	6		A3423	3-71492-020
21	7		80063	A3027709
21	8		80063	A3027713
21	9		80063	A3027708
21	10		A3423	3-71942-017
21	11		80063	A3027710
21	12		A3026	3-10311-001
21	13		80063	A3026845-4
21	14		80063	A3027725
21	15		A3423	3-71492-018
21	16		80063	A3027572-1
21	17	5910-00-010-8666	81349	M39014/01-1357
21	18		80063	A3030171
21	19		A3423	3-71492-016
21	20		A3026	3-10285.007//C
21	21		80063	A3026852-3
21	22		80063	A3027694
21	23		80063	A3027714
21	24		80063	A3027879

21	25		80063	A3031038-188
21	26		80063	A3031138
21	27		A3423	3-71492-025
21	28		80063	A3031431
21	29	5961-00-957-6865	81349	JAN1N3611
21	30	5910-00-010-8717	81349	M39014/01-1593
21	31		80063	CLR65BB560KGL
21	32		80063	A3030157
21	33		80063	A3030114
21	34	5905-00-458-9500	81349	RCR05G102JS
21	35	5930-00-498-5443	80207	MML2
21	36		80063	A3031038-203
21	37		A3026	4-74796-001
21	38		A3026	4-74796-004
21	39		A3026	3-10285.006//C
21	40		A3026	3-10311-002
21	41	5305-00-054-5639	96906	MS51957-5
21	42		80063	A3027765
21	43		A2728	0U-30.55
21	44		80063	A3027916
22	1	5961-00-965-9594	81349	JAN1N3957
22	2	5961-01-131-6908	14099	1N6075
22	3		80063	A3027953
22	4	5945-00-879-9494	02289	2HA2A126
22	5		80063	A3027798
22	6		80063	A3031038-213
22	7		80063	A3027828
22	8		80063	A3027696-2
22	9	5935-00-448-9337	81349	M55302/8-03
22	10		80063	A3027911
22	11		80063	A3027696-1
22	12		80063	A3027799
23	1		80063	A3027698
23	2		A3026	3-10311-003

23	3		80063	A3027737-1
23	4		80063	A3031038-206
23	5		80063	A3027865
23	6		80063	A3034571-1
23	7		80063	A3031258
23	8		80063	A3027007-1
23	9		A3026	3-10311-002
23	10		A3026	3-10285.005//C
23	11		80063	A3027866
23	12		80063	A3027863
23	13		A3026	3-10311-002
23	14	5305-00-054-5643	96906	MS51957-9
23	15	5999-01-277-2685	80063	A3027688
23	16	5999-01-277-2684	80063	A3027687
23	17		80063	A3031111
23	18		80063	A3031162
24	1		80063	A3031168
24	2		80063	A3031169
24	3		80063	A3031170
24	4		29990	ATC700A102FC50X
24	5		29990	ATC200B104NC50X
24	6	5910-00-124-0659	81349	M39014/01-1575
24	7		60935	402/1/57613/016
24	8		60935	402/1/57625/020
24	9	5910-00-010-8666	81349	M39014/01-1357
24	10		29990	ATC100A9R1BC50X
24	11		29990	ATC100A750JC50X
24	12		29990	ATC100A240FC50X
24	13		29990	ATC700A201FC50X
24	14		29990	ATC100A8R2CC50X
24	15		29990	ATC100A510FC50X
24	16		29990	ATC100A330JC50X
24	17		29990	ATC100A430FC50X
24	18		29990	ATC100A300FC50X

24	19		29990	ATC100A360JC50X
24	20		29990	ATC100A200JC50X
24	21		29990	ATC200B103KC50X
24	22		80063	A3031184
24	23	5935-01-080-1651	98291	52-452-0000
24	24	5935-01-053-4041	07187	4022893-001
24	25		A1631	281216-2
24	26		81349	M39016/19-042L
24	27	5950-00-035-4416	96906	MS75083-13
24	28		80063	A3030147
24	29		80063	A3030149
24	30		80063	A3030148
24	31		80063	A3030150
24	32		80063	A3031188
24	33	5950-00-035-4418	96906	MS75083-7
24	34	5950-00-031-4561	96906	MS75084-4
24	35	5895-01-185-5408	80063	A3030174
24	36		F7303	3310416114500
24	37		F7303	3310416105500
24	38		F7303	3310416104500
24	39		F7303	3310416102500
24	40	5961-00-170-9786	12436	V00691-001
24	41		04713	MMBT2907
24	42	5961-01-214-2382	89536	483743
24	43	5961-00-951-8757	81349	JAN2N2222A
24	44	5905-00-482-7695	81349	RCR05G242JS
24	45	5905-00-180-8303	81349	RCR05G152JS
24	46	5905-00-470-0369	81349	RCR05G151JS
24	47	5905-01-035-5065	81349	RCR05G103JS
24	48	5905-00-177-7486	81349	RCR05G221JS
24	49	5905-00-411-1851	81349	RCR05G562JS
24	50	5905-00-180-8314	81349	RCR05G513JS
24	51	5905-00-479-6633	81349	RCR05G301JS
24	52	5905-00-197-0221	81349	RCR05G270JS

24	53	5905-00-401-7429	81349	RCR05G751JS
24	54	5905-00-413-1200	81349	RCR05G203JS
24	55	5905-00-617-5089	81349	RCR05G153JS
24	56	5905-00-412-0758	81349	RCR05G510JS
24	57	5905-00-617-5093	81349	RCR05G473JS
24	58	5905-00-458-9500	81349	RCR05G102JS
24	59	5905-00-255-3699	81349	RCR05G100JS
24	60	5905-00-479-6658	81349	RCR05G362JS
24	61	5905-00-197-0223	81349	RCR05G750JS
24	62	5905-00-180-8301	81349	RCR05G101JS
24	63	5905-00-466-1218	81349	RCR05G822JS
24	64	5905-00-689-1290	81349	RCR05G512JS
24	65	5905-00-197-0219	81349	RCR05G131JS
24	66		80063	A3030142
24	67		52648	SP8691AB
24	68	5962-01-238-8470	52648	SP8690AB
24	69		80063	A3031038-58
24	70		80063	A3030770
24	71		80063	A3030757
24	72		80063	A3031552
24	73		80063	A3030911
24	74		80063	A3031553
24	75		80063	A3027782
24	76		80063	A3030769
24	77		80063	A3031164-1
24	78		13103	445214-102
24	79		80063	A3030708-14
24	80		80063	A3031164-2
24	81		80063	A3030708-13
24	82		80063	A3031554
24	83		80063	A3031165
24	84		80063	A3031164-4
24	85		80063	A3030754
24	86		80063	A3030753

24	87		80063	A3030752
24	88		80063	A3031164-3
24	89	6150-01-328-5675	80063	A3026941-3
24	90		80063	A3026941-10
24	91		80063	A3030708-6
24	92		80063	A3030708-5
24	93		80063	A3030708-18
24	94		80063	A3030708-7
24	95		80063	A3030708-11
24	96		80063	A3030708-12
24	97		80063	A3030708-10
24	98		80063	A3031167
24	99		80063	A3031166
24	100		80063	A3030708-9
25	1	5961-01-212-9328	04713	MV1404H
25	2	5961-00-496-7906	81349	JANTX1N4454
25	3		F2220	MTN1R.47UF16V20%
25	4		29990	ATC200B473KC50X
25	5		29990	ATC100A470JC50X
25	6		29990	ATC200B223KC50X
25	7		29990	ATC200B822KC50X
25	8		29990	ATC200B393KC50X
25	9	5910-01-180-5666	29990	ATC100A5R1CC50X
25	10		29990	ATC700A102FC50X
25	11		29990	ATC100A150JC50X
25	12		60935	402/1/57613/016
25	13		29990	ATC100A240FC50X
25	14	5950-01-187-1714	81349	M27/240-06
25	15	5950-00-035-4416	96906	MS75083-13
25	16		80063	A3030146
25	17		80063	A3030915
25	18		04713	MMBFU310
25	19	5905-00-617-5089	81349	RCR05G153JS
25	20	5905-00-470-9163	81349	RCR05G622JS

25	21	5905-00-470-0369	81349	RCR05G151JS
25	22	5905-00-412-0758	81349	RCR05G510JS
25	23	5905-00-471-4797	81349	RCR05G134JS
25	24	5905-00-180-8301	81349	RCR05G101JS
25	25	5905-00-458-9349	81349	RCR05G390JS
25	26		81349	JM38510/13101BPX
25	27	6625-01-104-6136	50021	DL233
25	28		80063	A3031173
25	29		80063	A3031172
25	30		80063	A3031189
25	31		80063	A3034571-2
25	32		80063	A3031308-207
26	1	5961-01-212-9328	04713	MV1404H
26	2	5961-00-496-7906	81349	JANTX1N4454
26	3	5910-00-113-9453	81349	M39014/02-1417
26	4		29990	ATC200B473KC50X
26	5		29990	ATC200B223KC50X
26	6		29990	ATC200B393KC50X
26	7		29990	ATC200B822KC50X
26	8		29990	ATC700A102FC50X
26	9		29990	ATC100A220JC50X
26	10		29990	ATC100A240FC50X
26	11		29990	ATC100A3R3D50X
26	12		60935	402/1/57613/016
26	13		29990	ATC100A470JC50X
26	14		29990	ATC700A331JC50X
26	15	5950-01-187-1714	81349	M27/240-06
26	16	5950-00-035-4416	96906	MS75083-13
26	17		80063	A3031506
26	18		80063	A3031505
26	19		04713	MMBFU310
26	20	5905-00-470-9163	81349	RCR05G622JS
26	21	5905-00-617-5089	81349	RCR05G153JS
26	22	5905-00-470-0369	81349	RCR05G151JS

26	23	5905-00-471-4797	81349	RCR05G134JS
26	24	5905-00-412-0758	81349	RCR05G510JS
26	25	5905-00-180-8301	81349	RCR05G101JS
26	26	5905-00-480-0013	81349	RCR05G241JS
26	27	5905-00-433-1853	81349	RCR05G220JS
26	28	5905-00-197-0223	81349	RCR05G750JS
26	29		81349	JM38510/13101BPX
26	30	6625-01-104-6136	50021	DL233
26	31		80063	A3031177
26	32		80063	A3031189
26	33		80063	A3031176
26	34		80063	A3034571-2
26	35		80063	A3031038-208
27	1	5961-01-218-4118	15238	BB221
27	2	5961-00-496-7906	81349	JANTX1N4454
27	3	5910-00-010-8717	81349	M39014/01-1593
27	4	5910-00-113-5278	81349	M39014/01-1587
27	5		29990	ATC100A470JC50X
27	6	5910-00-113-5445	81349	M39014/01-1339
27	7	5910-01-180-5666	29990	ATC100A5R1CC50X
27	8		29990	ATC100A6R8CC50X
27	9		29990	ATC100A150JC50X
27	10		29990	ATC700A102FC50X
27	11		60935	402/1/57613/016
27	12		29990	ATC200B104NC50X
27	13	5950-00-035-4416	96906	MS75083-13
27	14		04713	MMBFU310
27	15	5961-00-170-9786	12436	V00691-001
27	16	5905-00-458-9500	81349	RCR05G102JS
27	17		81349	RCR05G332JS
27	18	5905-01-035-5065	81349	RCR05G103JS
27	19	5905-00-180-8301	81349	RCR05G101JS
27	20	5905-00-433-1853	81349	RCR05G220JS
27	21	5905-00-489-7703	81349	RCR05G331JS

27	22	5905-00-197-0221	81349	RCR05G270JS
27	23	5905-00-401-7429	81349	RCR05G751JS
27	24	5905-00-413-1200	81349	RCR05G203JS
27	25	5905-00-617-5089	81349	RCR05G153JS
27	26	5905-00-470-0369	81349	RCR05G151JS
27	27	5905-00-458-9349	81349	RCR05G390JS
27	28	5905-00-479-6633	81349	RCR05G301JS
27	29	5905-00-471-4622	81349	RCR05G180JS
27	30		80063	A3031504
27	31		80063	A3030142
27	32		81349	JM38510/13101BPX
27	33	6625-01-104-6136	50021	DL233
27	34		80063	A3031189
27	35		80063	A3031250
27	36		80063	A3031182
27	37		80063	A3031180
27	38		80063	A3031038-209
27	39		80063	A3034571-2
28	1		29990	ATC100A270JC50X
28	2		29990	ATC100A200JC50X
28	3		29990	ATC100A220JC50X
28	4		29990	ATC100A6R8CC50X
28	5		29990	ATC100A330JC50X
28	6		29990	ATC100A8R2CC50X
28	7		29990	ATC100A470JC50X
28	8		29990	ATC100A3R9DC50X
28	9		29990	ATC100A390JC50X
28	10		80063	A3030910
28	11		80063	A3030150
28	12		80063	A3031186
28	13		80063	A3031185
29	1	5961-00-496-7906	81349	JANTX1N4454
29	2	5910-00-010-8717	81349	M39014/01-1593
29	3	5910-00-010-8715	81349	M39014/01-1489

29	4	5910-00-124-0659	81349	M39014/01-1575
29	5		60935	402/1/57612/019
29	6		29990	ATC200B104NC50X
29	7		F7303	3410799114400
29	8		F7303	3410799105400
29	9		F7303	3410799104400
29	10		F7303	3410799102400
29	11		F7303	3310416116500
29	12		82796	3310416103500
29	13		F7303	3310416104500
29	14		F7303	3310416102500
29	15	5905-00-135-3971	81349	RCR07G150JS
29	16	5905-00-458-9346	81349	RCR05G104JS
29	17	5905-00-484-7550	81349	RCR05G154JS
29	18	5905-01-035-5065	81349	RCR05G103JS
29	19	5905-00-180-8301	81349	RCR05G101JS
29	20	5905-00-255-3699	81349	RCR05G100JS
29	21	5905-00-617-5093	81349	RCR05G473JS
29	22	5962-01-103-7367	02735	CD4015BF/3
29	23	5962-01-124-4915	14933	7702501EB
29	24		18714	CD4508BF/3
29	25	5962-01-033-2283	31019	883C4068BC
29	26		14933	7704401CX
29	27	5962-01-164-5092	81349	M38510/05252BCB
29	28		04713	MC145152L1D
29	29	5962-01-140-5618	81349	M38510/05051BCB
29	30	5962-00-369-9839	81349	M38510/00803BCB
29	31	5962-01-131-7815	81349	M38510/05554BEX
29	32		80063	A3027699
29	33		80063	A3031164-1
29	34		80063	A3031038-19
29	35		80063	A3031164-2
29	36		80063	A3031164-4
29	37		80063	A3031164-3

30	1	5961-01-212-9328	04713	MV1404H
30	2	5961-01-067-9799	81349	JANTX1N5907
30	3	5910-00-010-8666	81349	M39014/01-1357
30	4	5910-00-124-0659	81349	M39014/01-1575
30	5	5910-00-156-5999	81349	M39014/01-1348
30	6	5910-00-113-5445	81349	M39014/01-1339
30	7	5910-00-010-8717	81349	M39014/01-1593
30	8	5910-00-098-8670	81349	M39014/01-1578
30	9	5910-00-113-5276	81349	M39014/01-1351
30	10		81349	M39104/01-1279
30	11		60935	402/1/57612/019
30	12		31433	T370B224M035AS
30	13		31433	MC752387-5
30	14	5910-01-034-2592	31433	T372C475M020AS
30	15		29990	ATC700A121JC50X
30	16	5910-00-113-9448	81349	M39014/01-1354
30	17	5910-00-098-9234	81349	M39014/01-1562
30	18		80063	A3026935
30	19	5920-01-252-7776	75915	255001
30	20		F7303	3410799116400
30	21		F7303	3410799103400
30	22		F7303	3410799104400
30	23		F7303	3410799102400
30	24	5935-01-053-4041	07187	4022893-001
30	25		81349	M39016/19-042L
30	26	5950-00-031-4557	96906	MS75084-12
30	27	5950-00-031-4560	96906	MS75084-16
30	28	5950-00-170-9770	96906	MS75084-15
30	29	5950-00-488-3056	96906	MS14046-4
30	30	5961-00-905-4815	81349	JAN2N918
30	31	5961-00-951-8757	81349	JAN2N2222A
30	32	5905-00-412-0758	81349	RCR05G510JS
30	33	5905-00-412-0759	81349	RCR05G514JS
30	34	5905-00-421-8918	81349	RCR05G302JS

30	35	5905-00-458-9348	81349	RCR05G181JS
30	36	5905-00-466-1215	81349	RCR05G123JS
30	37	5905-00-401-7424	81349	RCR05G222JS
30	38	5905-00-458-9346	81349	RCR05G104JS
30	39	5905-00-403-8837	81349	RCR05G223JS
30	40	5905-00-401-7427	81349	RCR05G332JS
30	41	5905-00-180-8303	81349	RCR05G152JS
30	42	5905-00-401-7428	81349	RCR05G561JS
30	43	5905-00-470-9481	81349	RCR05G202JS
30	44	5905-00-458-9500	81349	RCR05G102JS
30	45	5905-00-689-1290	81349	RCR05G512JS
30	46	5905-00-470-0370	81349	RCR05G205JS
30	47	5905-00-111-4852	81349	RCR20G2R7JS
30	48	5905-00-401-7430	81349	RCR05G752JS
30	49	5905-01-291-3983	32997	3082P-45-104
30	50		F7303	3410799108400
30	51	5940-00-951-3920	98291	FTMM16L2RED
30	52		27014	MM54HC4049J
30	53	5962-01-263-5734	12040	MM54HC390J
30	54	5962-01-240-5627	81349	M38510/65003BCA
30	55	5962-01-099-8505	27014	CD4046BMJ-MIL
30	56		81349	JM38510/05652BEX
30	57		A3036	U-58397.000011R
30	58		80063	A3031038-21
30	59		80063	A3027783
30	60		80063	A3031242
30	61		13103	445214-102
30	62		80063	A3031241
31	1		80063	A3027889
31	2		80063	A3027859
31	3		80063	A3031038-192
31	4		80063	A3034571-2
31	5		80063	A3030228
31	6		A3026	3-10311-001

31	7		80063	A3027852
31	8		80063	A3031416
31	9	5999-01-277-2686	80063	A3027673
31	10		80063	A3027874
32	1	5999-01-277-2687	80063	A3027662
32	2		80063	A3027664
32	3		80063	A3027666
32	4		80063	A3027667
32	5		80063	A3027663
32	6		80063	A3027680
32	7		80063	A3027665
32	8		29990	ATC700A102KC50X
32	9		17554	MPZ-010-105A-40
32	10	5950-00-377-9882	96906	MS75084-3
32	11	5905-00-689-1290	81349	RCR05G512JS
32	12	5905-01-185-5239	81349	RJR26FW502R
32	13	5905-00-412-0758	81349	RCR05G510JS
32	14	5905-00-481-5255	81349	RCR05G431JS
32	15	5905-00-177-7486	81349	RCR05G221JS
32	16	5905-01-035-5065	81349	RCR05G103JS
32	17		80063	A3031293
32	18		80063	A3031294
32	19		80063	A3027768
32	20		80063	A3031416
32	21		80063	A3031291
32	22		80063	A3031292
32	23		80063	A3027770
32	24		80063	A3031038-194
32	25		80063	A3027769
32	26		80063	A3030708-16
32	27		80063	A3030708-15
32	28		80063	A3030708-17
32	29		80063	A3027784
32	30		06776	050-1627

32	31	5910-00-010-8717	81349	M39014/01-1593
32	32		16546	C102K1005XFPB
32	33		16546	C479J1005CFPB
32	34	5910-01-011-8993	81349	PC26J060
32	35		80063	A3030127
32	36		F7303	518-0718-0-42-1-1-1
32	37		04713	MMBFU310
32	38	5905-00-479-6633	81349	RCR05G301JS
32	39		32997	3082P-45-102
32	40		80063	A3030105
32	41		80063	A3030106
32	42		80063	A3030107
32	43		80063	A3031466-11
32	44		12954	1N4454
32	45		28480	1N5711
32	46		17554	MZB-020-105A-20
32	47		17554	MZB-010-225A-20
32	48		29990	ATC700A102KC50X
32	49		16546	C103K1005XHPB
32	50		F7303	518-0718-0-42-1-1-1
32	51		32997	3082P-45-503
32	52	5905-00-458-9346	81349	RCR05G104JS
32	53	5905-00-411-1851	81349	RCR05G562JS
32	54	5905-00-412-0759	81349	RCR05G514JS
32	55	5905-00-479-6633	81349	RCR05G301JS
32	56	5905-00-401-7429	81349	RCR05G751JS
32	57	5962-00-365-5536	81349	M38510/10101BHB
32	58		52648	SL550G
32	59		80063	A3031466-17
32	60		29990	ATC700A102KC50X
32	61		F2220	37291
32	62		16546	C479J1005CFPB
32	63		F7303	518-0718-0-42-1-1-1
32	64	5961-00-501-1013	13499	352-0997-012

32	65	5905-00-407-0085	81349	RCR05G391JS
32	66	5905-00-492-2022	81349	RCR05G474JS
32	67	5905-00-407-0083	81349	RCR05G244JS
32	68		80063	A3030108
32	69		80063	A3030109
32	70		13103	445214-102
32	71		29990	ATC700A102KC50X
32	72		81349	CV36A250
32	73		17554	MZB-010-225A-20
32	74	5950-00-377-9882	96906	MS75084-3
32	75		F7303	518-0718-0-42-1-1-1
32	76	5961-00-501-1013	13499	352-0997-012
32	77	5961-01-047-7473	05869	750511-1
32	78	5905-00-407-0085	81349	RCR05G391JS
32	79	5905-00-407-0083	81349	RCR05G244JS
32	80	5905-00-458-9347	81349	RCR05G124JS
32	81	5905-00-689-1290	81349	RCR05G512JS
32	82		80063	A3030110
32	83		80063	A3031086
32	84		80063	A3030128
32	85		80063	A3031083
32	86		13103	445214-102
32	87		80063	A3031466-12
32	88		80063	A3031584
32	89		80063	CV36A090
32	90		81349	CV36A090
32	91		80063	A3030129
32	92	5895-01-237-4742	15542	TAK-390125
32	93		F7303	518-0718-0-42-1-1-1
32	94	5905-00-180-8301	81349	RCR05G101JS
32	95	5905-00-471-4621	81349	RCR05G620JS
32	96	5905-00-479-6633	81349	RCR05G301JS
32	97	5905-00-471-4622	81349	RCR05G180JS
32	98		80063	A3031563

32	99		80063	A3030708-4
32	100		12954	1N4454
32	101		F7303	518-0718-0-42-11-1
32	102	5961-01-214-2382	89536	483743
32	103		56845	1C5001-A3
32	104		18714	CD4016BK
32	105		04713	BAV99
32	106		F7303	518-0718-0-42-1-1-1
32	107	5905-00-469-7358	81349	RCR05G433JS
32	108	5905-00-480-0013	81349	RCR05G241JS
32	109		32997	3082P-45-203
32	110	5905-00-617-5093	81349	RCR05G473JS
32	111	5905-00-413-1200	81349	RCR05G203JS
32	112	5905-00-180-8314	81349	RCR05G513JS
32	113		32997	3082P-45-103
32	114	5905-00-407-0086	81349	RCR05G393JS
32	115		56845	7C1003-A3
32	116		07263	4066BFMQB
33	1		80063	A3027350
33	2		80063	A3027361
33	3		80063	A3027360
33	4		80063	A3027859
33	5		80063	A3031038-191
33	6		80063	A3034571-2
34	1		80063	A3027669
34	2		80063	A3027670
34	3		80063	A3027342
34	4		80063	A3027682
34	5		80063	A3027338
34	6		80063	A3030233
34	7		80063	A3027671
34	8		80063	A3027336
34	9	5961-01-067-3033	81349	JAN1N4454-1
34	10		04713	BAW56

34	11		04713	BAV70
34	12		16546	C103K1210XFPB
34	13		80063	A3030859
34	14		06776	050-1627
34	15		80063	A3030232
34	16		04713	MMBF4860
34	17		04713	2N3994
34	18	5905-00-197-0219	81349	RCR05G131JS
34	19	5905-00-197-0221	81349	RCR05G270JS
34	20	5905-00-493-5249	81349	RCR05G200JS
34	21	5905-00-180-8301	81349	RCR05G101JS
34	22	5905-00-458-9346	81349	RCR05G104JS
34	23	5905-00-470-0370	81349	RCR05G205JS
34	24	5905-00-470-9481	81349	RCR05G202JS
34	25	5905-00-458-9500	81349	RCR05G102JS
34	26		80063	A3027066-1
34	27		80063	A3031038-15
34	28		80063	A3027784
34	29	5999-01-199-9123	81349	M38527/01-038D
34	30		28480	1N5711
34	31		A3026	4-93969.0000
34	32		80063	MPZ-010-105A-40
34	33	5961-00-484-7740	04713	MMT3904
34	34	5905-00-617-5093	81349	RCR05G473JS
34	35	5905-00-403-8837	81349	RCR05G223JS
34	36	5905-00-421-8918	81349	RCR05G302JS
34	37	5905-00-197-0219	81349	RCR05G131JS
34	38	5905-00-458-9346	81349	RCR05G104JS
34	39	5905-00-407-0084	81349	RCR05G273JS
34	40	5905-00-466-1215	81349	RCR05G123JS
34	41	5905-01-035-5065	81349	RCR05G103JS
34	42		F7303	518-0718-0-42-1-1-1
34	43	5961-00-163-7231	81349	JANTX1N5711
34	44	5910-00-113-5471	81349	M39014/01-1336

34	45	5910-00-010-8717	81349	M39014/01-1593
34	46		31433	T3760D475M010AS
34	47		F7303	518-0718-0-42-1-1-1
34	48	5905-00-180-8301	81349	RCR05G101JS
34	49	5905-00-466-1416	81349	RCR05G201JS
34	50	5905-00-458-9500	81349	RCR05G102JS
34	51		80063	A3030102
34	52		80063	A3030103
34	53		52648	SL612CB/CM
34	54		12954	1N4454
34	55	5910-01-155-4634	31433	T374E106M015AS
34	56		31433	T370E336M006AS
34	57	5910-00-113-5465	81349	M39014/02-1360
34	58		31433	MC752387-5
34	59		F7303	518-0718-0-42-1-1-1
34	60	5961-00-484-7740	04713	MMT3904
34	61	5961-01-047-7473	05869	750511-1
34	62		04713	MMBF4860
34	63	5905-00-180-8301	81349	RCR05G101JS
34	64	5905-00-197-0224	81349	RCR05G511JS
34	65	5905-01-035-5065	81349	RCR05G103JS
34	66	5905-00-480-0013	81349	RCR05G241JS
34	67	5905-00-470-0370	81349	RCR05G205JS
34	68	5905-00-413-1200	81349	RCR05G203JS
34	69	5905-00-180-8314	81349	RCR05G513JS
34	70		52648	SL621C
34	71		31433	T370C475M020AS
34	72		16546	C560J1005CFPB
34	73		F2220	MTR1.5UF16V20%
34	74	5910-00-467-1725	17554	MMF-020-105R-10
34	75		31433	T370C335M020AS
34	76		F2220	MT3R15UF16V20%
34	77		F7303	518-0718-0-42-1-1-1
34	78	5961-01-214-2382	89536	483743

34	79	5962-00-365-5536	81349	M38510/10101BHB
34	80		A3026	4-93969.0000
34	81		31433	T372E336M006AS
34	82	5910-00-010-8717	81349	M39014/01-1593
34	83	5910-01-034-2592	31433	T372C475M020AS
34	84		31433	T372B105M020AS
34	85		F7303	518-0718-0-42-1-1-1
34	86	5905-01-035-5065	81349	RCR05G103JS
34	87	5905-00-412-0758	81349	RCR05G510JS
34	88	5905-00-197-0224	81349	RCR05G511JS
34	89	5905-00-617-5096	81349	RCR05G682JS
34	90	5905-00-458-9500	81349	RCR05G102JS
34	91	5905-00-470-9481	81349	RCR05G202JS
34	92		32997	3082P-45-503
34	93	5962-00-172-8261	96214	536958-1
34	94		12954	1N4454
34	95		31433	T372B225M010AS
34	96		16546	C103K1210XFPB
34	97		F7303	518-0718-0-42-1-1-1
34	98	5905-00-412-0759	81349	RCR05G514JS
34	99	5905-01-035-5065	81349	RCR05G103JS
34	100	5905-00-412-0760	81349	RCR05G563JS
34	101	5905-00-617-5093	81349	RCR05G473JS
34	102		02735	CD4027BK3
34	103		06481	971618-0411
34	104		80063	A3031466-8
34	105		04713	BAV99
34	106		12954	1N4454
34	107	5961-00-163-7231	81349	JANTX1N5711
34	108	5910-00-010-8666	81349	M39014/01-1357
34	109	5910-00-010-8717	81349	M39014/01-1593
34	110		F7303	518-0718-0-42-1-1-1
34	111		04713	MMBF4860
34	112	5905-00-401-7429	81349	RCR05G751JS

34	113	5905-00-470-0370	81349	RCR05G205JS
34	114	5905-00-421-8918	81349	RCR05G302JS
34	115	5905-01-169-9933	81349	RJR26FX502R
34	116	5905-00-401-7426	81349	RCR05G272JS
34	117	5905-00-180-8301	81349	RCR05G101JS
34	118	5905-00-458-9346	81349	RCR05G104JS
34	119	5905-00-617-5093	81349	RCR05G473JS
34	120		80063	A3030104
34	121		52648	SL612CB/CM
34	122		80063	A3031466-15
35	1		80063	A3027348
35	2		80063	A3027359
35	3		80063	A3027358
35	4		80063	A3034571-2
35	5		80063	A3031038-193
35	6		80063	A3027859
36	1		80063	A3027332
36	2		80063	A3027331
36	3		80063	A3027330
36	4		80063	A3027340
36	5		80063	A3027334
36	6		80063	A3027674
36	7		80063	A3027677
36	8		80063	A3027675
36	9		80063	A3027333
36	10		80063	A3027676
36	11		80063	A3027678
36	12		04713	BAW56
36	13		12954	1N4454
36	14		04713	BAV70
36	15	5910-00-124-0659	81349	M39014/01-1575
36	16		31433	T370C225M020AS
36	17	5910-00-010-8717	81349	M39014/01-1593
36	18	5910-00-010-8666	81349	M39014/01-1357

36	19		06776	050-1627
36	20	5961-00-484-7740	04713	MMT3904
36	21	5961-01-047-7473	05869	750511-1
36	22	5905-00-466-1216	81349	RCR05G330JS
36	23	5905-00-493-5249	81349	RCR05G200JS
36	24	5905-00-491-6344	81349	RCR05G120JS
36	25	5905-00-413-1200	81349	RCR05G203JS
36	26	5905-00-458-9346	81349	RCR05G104JS
36	27	5905-00-180-8314	81349	RCR05G513JS
36	28	5905-00-489-7703	81349	RCR05G331JS
36	29		80063	A3027784
36	30		80063	A3031038-60
36	31		04713	BAV70
36	32		04713	BAW56
36	33		12954	1N4454
36	34	5910-00-467-1725	17554	MMF-020-105R-10
36	35		F7303	518-0718-0-42-1-1-1
36	36	5962-01-195-4644	06481	974082-0411
36	37	5962-01-109-4231	14933	7901101CB
36	38		12954	1N4454
36	39		F7303	518-0718-0-42-1-1-1
36	40	5961-01-214-2382	89536	483743
36	41		04713	MMBT2907
36	42		31433	T370D106M006AS
36	43		F7303	518-0718-0-42-1-1-1
36	44	5905-00-180-8314	81349	RCR05G513JS
36	45	5905-01-035-5065	81349	RCR05G103JS
36	46	5962-01-213-0829	02735	CD4011BK3
36	47	5962-01-195-4644	06481	974082-0411
36	48		07263	4049BFMQB
36	49		80063	A3031466-14
36	50		12954	1N4454
36	51		31433	T372B474M035AS
36	52		F7303	518-0718-0-42-1-1-1

36	53	5961-00-484-7740	04713	MMT3904
36	54	5961-01-047-7473	05869	750511-1
36	55	5905-00-180-8314	81349	RCR05G513JS
36	56	5905-01-035-5065	81349	RCR05G103JS
36	57	5905-00-413-1200	81349	RCR05G203JS
36	58	5905-00-617-5093	81349	RCR05G473JS
36	59		12954	1N4454
36	60		31433	T372B105M020AS
36	61		F7303	518-0718-0-42-1-1-1
36	62	5905-00-458-9346	81349	RCR05G104JS
36	63	5905-01-035-5065	81349	RCR05G103JS
36	64	5905-00-195-4074	81349	RCR05G105JS
36	65		07263	4049BFMQB
36	66	5962-01-195-4644	06481	974082-0411
36	67		80063	A3031466-16
36	68		31433	T372B225M010AS
36	69		F7303	518-0718-0-42-1-1-1
36	70	5905-00-458-9346	81349	RCR05G104JS
36	71	5905-00-412-0759	81349	RCR05G514JS
36	72	5905-01-035-5065	81349	RCR05G103JS
36	73	5962-01-213-0829	02735	CD4011BK3
36	74		02735	CD4027BK3
36	75		80063	A3031466-13
36	76		12954	1N4454
36	77		80063	A3026718-28
36	78		A3026	4-93969.0000
36	79		F7303	518-0718-0-42-1-1-1
36	80	5905-00-458-9346	81349	RCR05G104JS
36	81	5905-00-180-8314	81349	RCR05G513JS
36	82	5905-00-403-8837	81349	RCR05G223JS
36	83	5962-01-195-4644	06481	974082-0411
36	84	5962-01-213-0829	02735	CD4011BK3
36	85		80063	A3031466-18
36	86		04713	BAV70

36	87		04713	BAW56
36	88		12954	1N4454
36	89		A3026	4-93969.0000
36	90		31433	T370B685M010AS
36	91		31433	MC752387-5
36	92		16546	C102K1005XFPB
36	93		F7303	518-0718-0-42-1-1-1
36	94		18714	CD4098BK
36	95		02735	CD4027BK3
36	96	5962-01-213-0829	02735	CD4011BK3
36	97		12954	1N4454
36	98		F7303	518-0718-0-42-1-1-1
36	99	5961-00-484-7740	04713	MMT3904
36	100	5961-01-047-7473	05869	750511-1
36	101	5905-00-413-1200	81349	RCR05G203JS
36	102	5905-01-035-5065	81349	RCR05G103JS
36	103	5905-00-458-9346	81349	RCR05G104JS
36	104		07263	4049BFMQB
36	105		06481	971618-0411
36	106		80063	A3031466-10
36	107		04713	BAV70
36	108		04713	BAW56
36	109		A3026	4-93969.0000
36	110		31433	T370E336M006AS
36	111		F7303	518-0718-0-42-1-1-1
36	112	5962-01-213-0829	02735	CD4011BK3
36	113		18714	CD4098BK
36	114		12954	1N4454
36	115	5910-00-467-1725	17554	MMF-020-105R-10
36	116		31433	T370B685M010AS
36	117		F7303	518-0718-0-42-1-1-1
36	118	5962-01-195-4644	06481	974082-0411
36	119		18714	CD4098BK
37	1	5961-00-496-7906	81349	JANTX1N4454

37	2	5961-00-957-6865	81349	JAN1N3611
37	3		31433	T370-D106M020AS
37	4		31433	T372B474M035AS
37	5		31433	T372B106M002AS
37	6		A3026	4-93969.0000
37	7		16546	C102K1005XFPB
37	8		31433	T370E336M006AS
37	9	5910-00-010-8666	81349	M39014/01-1357
37	10	5910-00-495-0042	81349	M39003/01-3076
37	11	5910-00-010-8717	81349	M39014/01-1593
37	12		F2220	MT4R22UF15V20%
37	13	5910-00-124-0659	81349	M39014/01-1575
37	14	5910-01-034-2593	31433	T372D106M020AS
37	15		16546	C152K1005XFPB
37	16	5935-00-530-4650	81349	M55302/7-03
37	17	5961-00-484-7740	04713	MMT3904
37	18	5961-00-951-8757	81349	JAN2N2222A
37	19		80063	A3031526
37	20	5905-00-689-1290	81349	RCR05G512JS
37	21	5905-00-458-9500	81349	RCR05G102JS
37	22	5905-00-407-0082	81349	RCR05G182JS
37	23	5905-01-035-5065	81349	RCR05G103JS
37	24	5905-00-433-6483	81349	RCR05G392JS
37	25	5905-00-407-0083	81349	RCR05G244JS
37	26	5905-00-466-1219	81349	RCR05G823JS
37	27	5905-00-617-5090	81349	RCR05G333JS
37	28	5905-00-471-4797	81349	RCR05G134JS
37	29	5905-00-471-2226	81349	RCR05G303JS
37	30	5905-00-412-4045	81349	RCR05G334JS
37	31	5905-00-433-6482	81349	RCR05G304JS
37	32	5905-00-470-1319	81349	RCR05G204JS
37	33	5905-00-482-7695	81349	RCR05G242JS
37	34	5905-00-407-0089	81349	RCR05G753JS
37	35	5905-00-407-0084	81349	RCR05G273JS

37	36	5905-00-470-9163	81349	RCR05G622JS
37	37	5905-00-401-7431	81349	RCR05G821JS
37	38	5905-00-433-6486	81349	RCR05G912JS
37	39	5905-00-471-2227	81349	RCR05G824JS
37	40	5905-00-413-1200	81349	RCR05G203JS
37	41	5905-00-180-8303	81349	RCR05G152JS
37	42	5905-00-432-6389	81349	RNC55K7501FS
37	43	5905-00-935-8539	81349	RCR20G202JS
37	44	5905-00-401-7424	81349	RCR05G222JS
37	45	5905-00-479-6633	81349	RCR05G301JS
37	46	5905-00-411-1851	81349	RCR05G562JS
37	47	5905-00-004-6121	81349	RNC55K3921FS
37	48	5905-00-488-3259	81349	RNC55K2943FS
37	49		80063	A3027250-1
37	50	5905-00-432-0404	81349	RNC55K2102FS
37	51	5905-00-412-0758	81349	RCR05G510JS
37	52	5905-00-481-0961	81349	RCR05G240JS
37	53	5962-01-049-0349	81349	M38510/10901BGC
37	54	5962-01-101-3737	09344	PC73678-1
37	55		07933	LM139J
37	56	5962-01-239-6614	04713	MC3558G
37	57		80063	A3031038-214
37	58		80063	A3027787
37	59		80063	A3027728
37	60		A3026	3-10285.005//C
37	61		A3026	3-10311-002
37	62	5999-01-200-4115	81349	M38527/02-018D
37	63		13103	445214-102
38	1	6625-01-267-4402	80058	TS-4255/GRC-215

SOMETHING WRONG WITH THIS PUBLICATION?



THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL!

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703-5007

DATE SENT 10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-20P

PUBLICATION DATE

23 Jan 78

PUBLICATION TITLE

Radar Set AN/PRC-76

BE EXACT... PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.
33			
44		19	
45			

For item 2, change the NSN to read: 5835-00-134-9186.
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).
Reason: It is a separate item and is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.
Reason: Same as above

SAMPLE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER
SSG I. M. DeSpirit of 999-1776

SIGN HERE

SOMETHING WRONG WITH THIS PUBLICATION?



THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-5895-1318-24P

PUBLICATION DATE

1 April 1991

PUBLICATION TITLE

Receiver-Transmitter,
Radio RT-1511/GRC-215

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

By Order of the Secretary of the Army:

CARL E. VUONO
General, United States Army
Chief of Staff

Official:

PATRICIA P. HICKERSON
Colonel, United States Army
The Adjutant General

By Order of the Secretary of the Navy:

JOHN C. WEAVER
Rear Admiral, United States Navy
Commander, Space and Naval Warfare
Systems Command

By Order of the Secretary of the Air Force:

LARRY D. WELSH
General, United States Air Force
Chief of Staff

Official:

CHARLES C. McDONALD
General, United States Air Force
Commander, Air Force
Logistics Command

DISTRIBUTION:

To be distributed in accordance with DA Form 12-36-E,
block 9141, Unit and Direct Support/General Support
Maintenance requirements for TM 11-5895-1318-24P.